imall

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832 Email & Skype: info@chipsmall.com Web: www.chipsmall.com Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





Is Now Part of



ON Semiconductor®

To learn more about ON Semiconductor, please visit our website at <u>www.onsemi.com</u>

ON Semiconductor and the ON Semiconductor logo are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor dates sheds, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor dates sheds and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights of others. ON Semiconductor products are not designed, intended, or authorized for use on similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor and its officers, employees, subsidiaries, affliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out or i, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ON Semiconduc

FAIRCHILD

SEMICONDUCTOR®

74LVX373 Low Voltage Octal Transparent Latch with 3-STATE Outputs

General Description

The LVX373 consists of eight latches with 3-STATE outputs for bus organized system applications. The latches appear transparent to the data when Latch Enable (LE) is HIGH. When LE is LOW, the data satisfying the input timing requirements is latched. Data appears on the bus when the Output Enable (\overline{OE}) is LOW. When \overline{OE} is HIGH, the bus output is in the high impedance state. The inputs tolerate up to 7V allowing interface of 5V systems to 3V systems.

Features

- Input voltage translation from 5V to 3V
- Ideal for low power/low noise 3.3V applications
- Guaranteed simultaneous switching noise level and dynamic threshold performance


June 1993

Revised April 2005

Ordering Code:

Order Number	Package Number	Package Description							
74LVX373M	M20B	20-Lead Small Outline Integrated Circuit (SOIC), JEDEC MS-013, 0.300" Wide							
74LVX373SJ	M20D	Pb-Free 20-Lead Small Outline Package (SOP), EIAJ TYPE II, 5.3mm Wide							
74LVX373MTC	MTC20	20-Lead Thin Shrink Small Outline Package (TSSOP), JEDEC MO-153, 4.4mm Wide							
Devices also available	Devices also available in Tape and Reel. Specify by appending suffix letter "X" to the ordering code								

Pb-Free package per JEDED J-STD-020B.

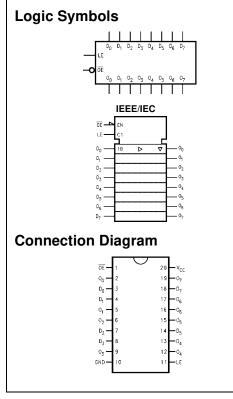

Pin Descriptions

Pin Names	Description	
D ₀ -D ₇	Data Inputs	
LE	Latch Enable Input	
OE	Output Enable Input	
O ₀ O ₇	3-STATE Latch Outputs	

Truth Table

	Inputs						
LE	OE	D _n	O _n				
Х	Н	Х	Z				
н	L	L	L				
н	L	Н	н				
L	L	Х	O ₀				

H = HIGH Voltage Level

L = LOW Voltage Level

Z = High Impedance X = Immaterial


 $O_0 = Previous O_0$ before HIGH-to-LOW transition of Latch Enable

Functional Description

The LVX373 contains eight D-type latches with 3-STATE standard outputs. When the Latch Enable (LE) input is HIGH, data on the D_n inputs enters the latches. In this condition the latches are transparent, i.e., a latch output will change state each time its D input changes. When LE is LOW, the latches store the information that was present on the D inputs a setup time preceding the HIGH-to-LOW tran-

sition of LE. The 3-STATE standard outputs are controlled by the Output Enable (\overline{OE}) input. When \overline{OE} is LOW, the standard outputs are in the 2-state mode. When \overline{OE} is HIGH, the standard outputs are in the high impedance mode but this does not interfere with entering new data into the latches.



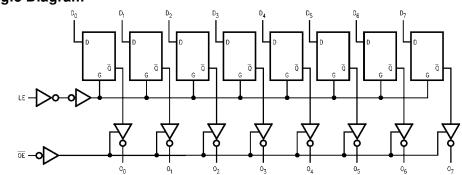

Please note that this diagram is provided only for the understanding of logic operations and should not be used to estimate propagation delays.

Absolute Maximum Ratings(Note 1)

Supply Voltage (V _{CC}) DC Input Diode Current (I _{IK})	-0.5V to +7.0V
$V_{\rm I} = -0.5V$	–20 mA
DC Input Voltage (VI)	-0.5V to 7V
DC Output Diode Current (I _{OK})	
$V_{O} = -0.5V$	–20 mA
$V_O = V_{CC} + 0.5V$	+20 mA
DC Output Voltage (V _O)	-0.5V to V _{CC} + 0.5V
DC Output Source	
or Sink Current (I _O)	±25 mA
DC V _{CC} or Ground Current	
(I _{CC} or I _{GND})	±75 mA
Storage Temperature (T _{STG})	-65°C to +150°C
Power Dissipation	180 mW

Recommended Operating Conditions (Note 2)

Supply Voltage (V _{CC})	2.0V to 3.6V
Input Voltage (V _I)	0V to 5.5V
Output Voltage (V_0)	0V to V _{CC}
Operating Temperature (T _A)	-40°C to +85°C
Input Rise and Fall Time ($\Delta t/\Delta V$)	0 ns/V to 100 ns/V

74LVX373

Note 1: The "Absolute Maximum Ratings" are those values beyond which the safety of the device cannot be guaranteed. The device should not be operated at these limits. The parametric values defined in the Electrical Characteristics tables are not guaranteed at the absolute maximum ratings. The "Recommended Operating Conditions" table will define the conditions for actual device operation.

Note 2: Unused inputs must be held HIGH or LOW. They may not float.

DC Electrical Characteristics

Symbol	Parameter	V _{cc}		T _A = +25°C	;	$T_A = -40^{\circ}$	C to +85°C	Units	Conditions		
Symbol			Min	Тур	Max	Min	Max	onito	Conditions		
VIH	HIGH Level	2.0	1.5			1.5					
	Input Voltage	3.0	2.0			2.0		V			
		3.6	2.4			2.4					
VIL	LOW Level	2.0			0.5		0.5				
	Input Voltage	3.0			0.8		0.8	V			
		3.6			0.8		0.8				
V _{OH}	HIGH Level	2.0	1.9	2.0		1.9			$V_{IN} = V_{IH} \text{ or } V_{IL}$ $I_{OH} = -50 \ \mu$		
	Output Voltage	3.0	2.9	3.0		2.9		V	I _{OH} = -50 μ.		
		3.0	2.58			2.48			I _{OH} = -4 mA		
V _{OL}	LOW Level	2.0		0.0	0.1		0.1		$V_{IN} = V_{IH} \text{ or } V_{IL} I_{OL} = 50 \ \mu \text{A}$		
	Output Voltage	3.0		0.0	0.1		0.1	V	I _{OL} = 50 μA		
		3.0			0.36		0.44		I _{OL} = 4 mA		
I _{OZ}	3-STATE Output	3.6			±0.25		±2.5	μA	$V_{IN} = V_{IH} \text{ or } V_{IL}$		
	Off-State Current								V _{OUT} = V _{CC} or GND		
I _{IN}	Input Leakage Current	3.6			±0.1		±1.0	μA	V _{IN} = 5.5V or GND		
I _{CC}	Quiescent Supply Current	3.6			4.0		40.0	μA	$V_{IN} = V_{CC}$ or GND		

Noise Characteristics (Note 3)

Symbol	Parameter	v _{cc}	$T_A = 25^{\circ}C$		Units	C _L (pF)	
			Тур	Limit	onito		
V _{OLP}	Quiet Output Maximum Dynamic V _{OL}		0.5	0.8	V	50	
V _{OLV}	Quiet Output Minimum Dynamic V _{OL}	3.3	-0.5	-0.8	V	50	
V _{IHD}	Minimum HIGH Level Dynamic Input Voltage	3.3		2.0	V	50	
V _{ILD}	Maximum LOW Level Dynamic Input Voltage			0.8	V	50	

Note 3: Input $t_r = t_f = 3$ ns.

က
~
က
×
\mathbf{C}
~
_
4
N

AC Electrical Characteristics

Symbol	Parameter	V _{CC}		$T_A = +25^{\circ}C$:	$T_A = -40^{\circ}$	C to +85°C	Units	Conditions
Symbol	Falanetei	(V)	Min	Тур	Max	Min	Max		
t _{PLH}	Propagation Delay Time	2.7		7.7	15.0	1.0	18.5		C _L = 15 pF
t _{PHL}	D _n to O _n	-		10.2	18.5	1.0	22.0	ns	C _L = 50 pF
		$\textbf{3.3}\pm\textbf{0.3}$		6.0	9.7	1.0	11.5	115	C _L = 15 pF
				8.5	13.2	1.0	15.0		C _L = 50 pF
t _{PLH}	Propagation Delay Time	2.7		7.5	14.5	1.0	17.5		C _L = 15 pF
t _{PHL}	LE to On			10.0	18.0	1.0	21.0	ns	C _L = 50 pF
		$\textbf{3.3}\pm\textbf{0.3}$		5.8	9.3	1.0	11.0	113	C _L = 15 pF
				8.3	12.8	1.0	14.5		$C_L = 50 \text{ pF}$
t _{PZL}	3-STATE Output	2.7		7.7	15.0	1.0	18.5		$C_L = 15 \text{ pF}, R_L = 1 \text{ k}\Omega$
t _{PZH}	Enable Time			10.2	18.5	1.0	22.0	ns	$C_L = 50 \text{ pF}, \text{ R}_L = 1 \text{ k}\Omega$
		$\textbf{3.3}\pm\textbf{0.3}$		6.0	9.7	1.0	11.5	110	$C_L = 15 \text{ pF}, R_L = 1 \text{ k}\Omega$
				8.5	13.2	1.0	15.0		$C_L = 50 \text{ pF}, \text{ R}_L = 1 \text{ k}\Omega$
t _{PLZ}	3-STATE Output	2.7		9.8	18.0	1.0	21.0	ns	$C_L = 50 \text{ pF}, \text{ R}_L = 1 \text{ k}\Omega$
t _{PHZ}	Disable Time	$\textbf{3.3}\pm\textbf{0.3}$		8.2	12.8	1.0	14.5	110	$C_L = 50 \text{ pF}, \text{ R}_L = 1 \text{ k}\Omega$
t _W	LE Pulse Width, HIGH	2.7	6.5			7.5		ns	
		$\textbf{3.3}\pm\textbf{0.3}$	5.0			5.0			
t _S	Setup Time, D _n to LE	2.7	6.0			6.0		ns	
		$\textbf{3.3}\pm\textbf{0.3}$	4.0			4.0			
t _H	Hold Time, D _n to LE	2.7	1.0			1.0		ns	
		$\textbf{3.3}\pm\textbf{0.3}$	1.0			1.0			
t _{OSLH}	Output to Output Skew	2.7			1.5		1.5	ns	C _L = 50 pF
t _{OSHL}	(Note 4)	3.3			1.5		1.5		


Note 4: Parameter guaranteed by design. $t_{OSLH} = |t_{PLHm} - t_{PLHn}|$, $t_{OSHL} = |t_{PHLm} - t_{PHLn}|$


Capacitance

Symbol	Parameter		$T_A = +25^{\circ}C$		$T_A = -40^{\circ}$	Units	
	i arameter		Тур	Max	Min		Max
CIN	Input Capacitance		4	10		10	pF
C _{OUT}	Output Capacitance		6				pF
CPD	Power Dissipation		27				pF
	Capacitance (Note 5)						


Note 5: C_{PD} is defined as the value of the internal equivalent capacitance which is calculated from the operating current consumption without load.

Average operating current can be obtained by the equation: $I_{CC(opr.)} = \frac{C_{PD} \times V_{CC} \times f_{IN} + I_{CC}}{8 \text{ (per Latch)}}$

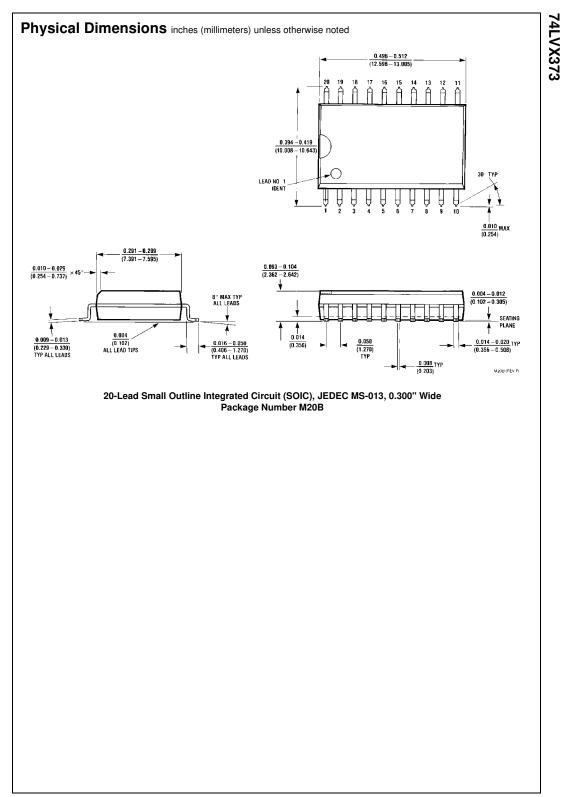

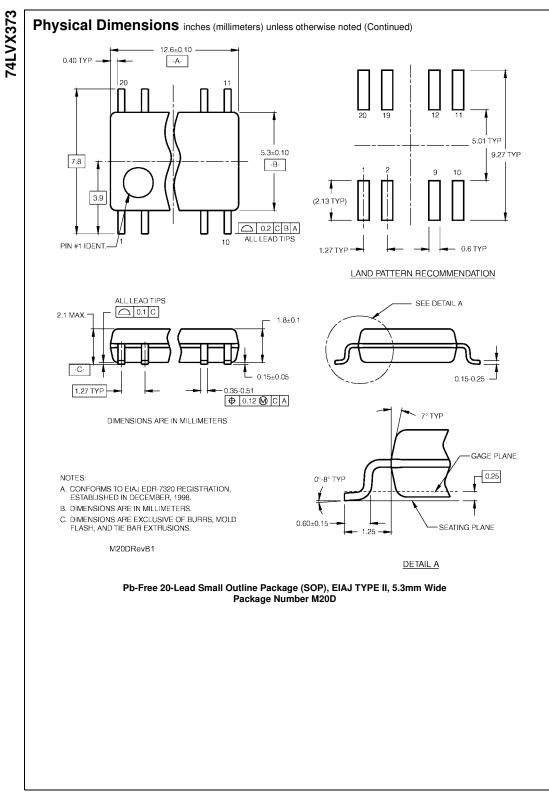

www.fairchildsemi.com

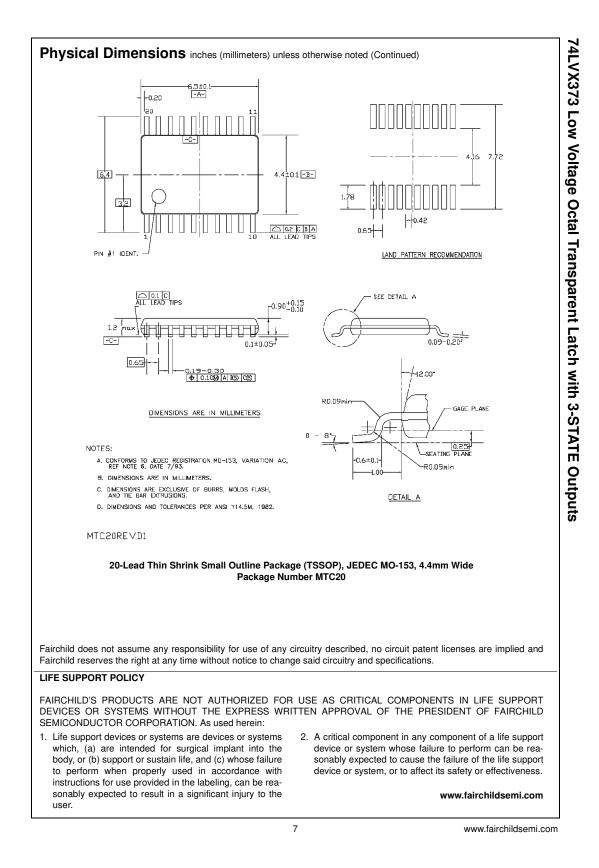

ON Semiconductor and are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at <u>www.onsemi.com/site/pdf/Patent-Marking.pdf</u>. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor has against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death ass

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor 19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada Email: orderlit@onsemi.com N. American Technical Support: 800–282–9855 Toll Free USA/Canada Europe, Middle East and Africa Technical Support: Phone: 421 33 790 2910

Japan Customer Focus Center Phone: 81-3-5817-1050 ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative

© Semiconductor Components Industries, LLC