

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



# Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China









### Is Now Part of



# ON Semiconductor®

To learn more about ON Semiconductor, please visit our website at <a href="https://www.onsemi.com">www.onsemi.com</a>

ON Semiconductor and the ON Semiconductor logo are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any EDA Class 3 medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, emplo





# 74VHCT374A Octal D-Type Flip-Flop with 3-STATE Outputs

### **Features**

- High speed: f<sub>MAX</sub> = 140MHz (Typ.) at T<sub>A</sub> = 25°C
- High noise immunity: V<sub>IH</sub> = 2.0V, V<sub>IL</sub> = 0.8V
- Power down protection is provided on all inputs and outputs
- Low power dissipation: I<sub>CC</sub> = 4µA (Max.) @ T<sub>A</sub> = 25°C
- Pin and function compatible with 74HCT374

### **General Description**

The VHCT374A is an advanced high speed CMOS octal flip-flop with 3-STATE output fabricated with silicon gate CMOS technology. It achieves the high speed operation similar to equivalent Bipolar Schottky TTL while maintaining the CMOS low power dissipation. This 8-bit D-type flip-flop is controlled by a clock input (CP) and an output enable input  $(\overline{OE})$ . When the  $\overline{OE}$  input is HIGH, the eight outputs are in a high impedance state.

Protection circuits ensure that 0V to 7V can be applied to the input and output<sup>(1)</sup> pins without regard to the supply voltage. This device can be used to interface 3V to 5V systems and two supply systems such as battery back up. This circuit prevents device destruction due to mismatched supply and input voltages.

### Note:


1. Outputs in OFF-State.

### **Ordering Information**

Order Number	Package Number	Package Description
74VHCT374AM	M20B	20-Lead Small Outline Integrated Circuit (SOIC), JEDEC MS-013, 0.300" Wide
74VHCT374ASJ	M20D	20-Lead Small Outline Package (SOP), EIAJ TYPE II, 5.3mm Wide
74VHCT374AMTC	MTC20	20-Lead Thin Shrink Small Outline Package (TSSOP), JEDEC MO-153, 4.4mm Wide

Surface mount packages are also available on Tape and Reel. Specify by appending the suffix letter "X" to the ordering number. Pb-Free package per JEDEC J-STD-020B.


### **Connection Diagram**



### **Pin Description**

Pin Names	Description
D <sub>0</sub> –D <sub>7</sub>	Data Inputs
СР	Clock Pulse Input 3-STATE
ŌĒ	Output Enable Input 3-STATE
O <sub>0</sub> -O <sub>7</sub>	Outputs

### **Logic Symbol**



### **Functional Description**

The VHCT374A consists of eight edge-triggered flipflops with individual D-type inputs and 3-STATE true outputs. The buffered clock and buffered Output Enable are common to all flip-flops. The eight flip-flops will store the state of their individual D inputs that meet the setup and hold time requirements on the LOW-to-HIGH Clock (CP) transition. With the Output Enable  $\overline{(OE)}$  LOW, the contents of the eight flip-flops are available at the outputs. When the  $\overline{OE}$  is HIGH, the outputs go to the high impedance state. Operation of the  $\overline{OE}$  input does not affect the state of the flip-flops.

### **Truth Table**

	Inputs					
D <sub>n</sub>	СР	ŌĒ	O <sub>n</sub>			
Н	~	L	Н			
L	~	L	L			
Х	Х	Н	Z			

H = HIGH Voltage Level


L = LOW Voltage Level

X = Immaterial

Z = High Impedance

∠ = LOW-to-HIGH Transition

### **Logic Diagram**

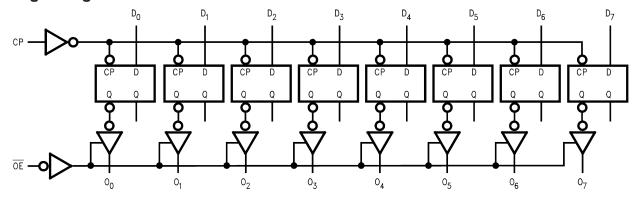

Please note that this diagram is provided only for the understanding of logic operations and should not be used to estimate propagation delays.

### **Absolute Maximum Ratings**

Stresses exceeding the absolute maximum ratings may damage the device. The device may not function or be operable above the recommended operating conditions and stressing the parts to these levels is not recommended. In addition, extended exposure to stresses above the recommended operating conditions may affect device reliability. The absolute maximum ratings are stress ratings only.

Symbol	Parameter	Rating
V <sub>CC</sub>	Supply Voltage	-0.5V to +7.0V
V <sub>IN</sub>	DC Input Voltage	-0.5V to +7.0V
V <sub>OUT</sub>	DC Output Voltage	
	Note 2	–0.5V to V <sub>CC</sub> + 0.5V
	Note 3	-0.5V to +7.0V
I <sub>IK</sub>	Input Diode Current	–20mA
I <sub>OK</sub>	Output Diode Current <sup>(4)</sup>	±20mA
I <sub>OUT</sub>	DC Output Current	±25mA
I <sub>CC</sub>	DC V <sub>CC</sub> / GND Current	±75mA
T <sub>STG</sub>	Storage Temperature	–65°C to +150°C
TL	Lead Temperature (Soldering, 10 seconds)	260°C

### Recommended Operating Conditions<sup>(5)</sup>

The Recommended Operating Conditions table defines the conditions for actual device operation. Recommended operating conditions are specified to ensure optimal performance to the datasheet specifications. Fairchild does not recommend exceeding them or designing to absolute maximum ratings.

Symbol	Parameter	Rating
V <sub>CC</sub>	Supply Voltage	4.5V to +5.5V
V <sub>IN</sub>	Input Voltage	0V to +5.5V
V <sub>OUT</sub>	Output Voltage	
	Note 2	0V to V <sub>CC</sub>
	Note 3	0V to 5.5V
T <sub>OPR</sub>	Operating Temperature	-40°C to +85°C
t <sub>r</sub> , t <sub>f</sub>	Input Rise and Fall Time, $V_{CC} = 5.0V \pm 0.5V$	0ns/V ~ 20ns/V

### Notes

- 2. HIGH or LOW state. I<sub>OUT</sub> absolute maximum rating must be observed.
- 3. When outputs are in OFF-State or when  $V_{CC} = 0V$ .
- 4.  $V_{OUT} < GND$ ,  $V_{OUT} > V_{CC}$  (Outputs Active).
- 5. Unused inputs must be held HIGH or LOW. They may not float.

### **DC Electrical Characteristics**

					T,	<sub>գ</sub> = 25՝	C.	T <sub>A</sub> = -	-40°C 85°C	
Symbol	Parameter	V <sub>CC</sub> (V)	Con	ditions	Min.	Тур.	Max.	Min.	Max.	Units
V <sub>IH</sub>	HIGH Level Input Voltage	4.5			2.0			2.0		V
		5.5			2.0			2.0		
V <sub>IL</sub>	LOW Level Input Voltage	4.5					0.8		0.8	V
		5.5					0.8		0.8	
V <sub>OH</sub>	HIGH Level Output	4.5		$I_{OH} = -50\mu A$	4.40	4.50		4.40		V
	Voltage		or V <sub>IL</sub>	$I_{OH} = -8mA$	3.94			3.80		
V <sub>OL</sub>	LOW Level Output	4.5		$I_{OL} = +50\mu A$		0.0	0.1		0.1	V
	Voltage		or V <sub>IL</sub>	$I_{OL} = +8mA$			0.36		0.44	
I <sub>OZ</sub>	3-STATE Output OFF-State Current	5.5	$V_{IN} = V_{IH} $ $V_{OUT} = V_{C}$				±0.25		±2.5	μA
I <sub>IN</sub>	Input Leakage Current	0–5.5	$V_{IN} = 5.5V$	or GND			±0.1		±1.0	μΑ
I <sub>CC</sub>	Quiescent Supply Current	5.5	$V_{IN} = V_{CC}$ or GND				4.0		40.0	μA
Ісст	Maximum I <sub>CC</sub> /Input	5.5	V <sub>IN</sub> = 3.4V, Other Inputs = V <sub>CC</sub> or GND				1.35		1.50	mA
l <sub>OFF</sub>	Output Leakage Current (Power Down State)	0.0	V <sub>OUT</sub> = 5.5	5V			0.5		5.0	μА

### **Noise Characteristics**

				$T_A = 25^{\circ}C$		
Symbol	Parameter	V <sub>CC</sub> (V)	Conditions	Тур.	Limits	Units
V <sub>OLP</sub> <sup>(6)</sup>	Quiet Output Maximum Dynamic V <sub>OL</sub>	5.0	C <sub>L</sub> = 50pF	1.2	1.6	V
V <sub>OLV</sub> <sup>(6)</sup>	Quiet Output Minimum Dynamic V <sub>OL</sub>	5.0	C <sub>L</sub> = 50pF	-1.2	-1.6	V
V <sub>IHD</sub> <sup>(6)</sup>	Minimum HIGH Level Dynamic Input Voltage	5.0	C <sub>L</sub> = 50pF		2.0	V
V <sub>ILD</sub> <sup>(6)</sup>	Maximum LOW Level Dynamic Input Voltage	5.0	C <sub>L</sub> = 50pF		0.8	V

### Note:

6. Parameter guaranteed by design.

### **AC Electrical Characteristics**

					T <sub>A</sub> = 25°C		С	T <sub>A</sub> = -40°C to +85°C		
Symbol	Parameter	$V_{CC}(V)$	Cond	ditions	Min.	Тур.	Max.	Min.	Max.	Units
t <sub>PLH</sub> , t <sub>PHL</sub>	Propagation Delay	5.0 ± 0.5		C <sub>L</sub> = 15pF		4.1	9.4	1.0	10.5	ns
	Time			$C_L = 50pF$		5.6	10.4	1.0	11.5	
t <sub>PZL</sub> , t <sub>PZH</sub>	3-STATE Output	5.0 ± 0.5	$R_L = 1k\Omega$	C <sub>L</sub> = 15pF		6.5	10.2	1.0	11.5	ns
	Enable Time			C <sub>L</sub> = 50pF		7.3	11.2	1.0	12.5	
t <sub>PLZ</sub> , t <sub>PHZ</sub>	3-STATE Output Disable Time	5.0 ± 0.5	$R_L = 1k\Omega$	C <sub>L</sub> = 50pF		7.0	11.2	1.0	12.0	ns
t <sub>OSLH</sub> , t <sub>OSHL</sub>	Output to Output Skew	5.0 ± 0.5	(7)	(7)			1.0		1.0	ns
f <sub>MAX</sub>	Maximum Clock	5.0 ± 0.5		C <sub>L</sub> = 15pF	90	140		80		MHz
	Frequency			C <sub>L</sub> = 50pF	85	130		75		
C <sub>IN</sub>	Input Capacitance		V <sub>CC</sub> = Open			4	10		10	pF
C <sub>OUT</sub>	Output Capacitance		V <sub>CC</sub> = 5.0V			9				pF
C <sub>PD</sub>	Power Dissipation Capacitance		(8)			25				pF

### Notes:


- 7. Parameter guaranteed by design.  $t_{OSLH} = |t_{PLH\;max} t_{PLH\;min}|; \ t_{OSHL} = |t_{PHL\;max} t_{PHL\;min}|$
- 8.  $C_{PD}$  is defined as the value of the internal equivalent capacitance which is calculated from the operating current consumption without load. Average operating current can be obtained by the equation:  $I_{CC}$  (Opr.) =  $C_{PD} \cdot V_{CC} \cdot f_{IN} + I_{CC} / 8$  (per F/F). The total  $C_{PD}$  when n pcs. of the octal D Flip-Flop operates can be calculated by the equation:  $C_{PD}$ (total) = 20 + 12m


### **AC Operating Requirements**

			Т	T <sub>A</sub> = 25°C		T <sub>A</sub> = -40°0		
Symbol	Parameter	V <sub>CC</sub> (V)	Min.	Тур.	Max.	Min.	Max.	Units
$t_W(H), t_W(L)$	Minimum Pulse Width (CP)	5.0 ± 0.5	6.5			8.5		ns
t <sub>S</sub>	Minimum Set-up Time	5.0 ± 0.5	2.5			2.5		ns
t <sub>H</sub>	Minimum Hold Time	5.0 ± 0.5	2.5			2.5		ns

### **Physical Dimensions**

Dimensions are in millimeters unless otherwise noted.










Figure 1. 20-Lead Small Outline Integrated Circuit (SOIC), JEDEC MS-013, 0.300" Wide Package Number M20B


### Physical Dimensions (Continued)


Dimensions are in millimeters unless otherwise noted.





LAND PATTERN RECOMMENDATION






DIMENSIONS ARE IN MILLIMETERS

### NOTES:

- A. CONFORMS TO EIAJ EDR-7320 REGISTRATION, ESTABLISHED IN DECEMBER, 1998.

  B. DIMENSIONS ARE IN MILLIMETERS.

  C. DIMENSIONS ARE EXCLUSIVE OF BURRS, MOLD FLASH, AND TIE BAR EXTRUSIONS.




DETAIL A


M20DREVC


Figure 2. 20-Lead Small Outline Package (SOP), EIAJ TYPE II, 5.3mm Wide Package Number M20D

### Physical Dimensions (Continued)

Dimensions are in millimeters unless otherwise noted.

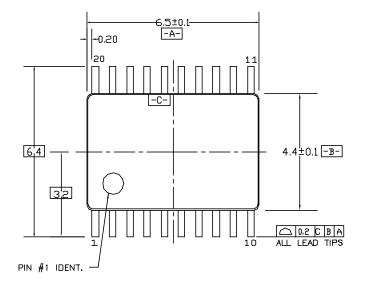





DIMENSIONS ARE IN MILLIMETERS

### NOTES:

- A. CONFORMS TO JEDEC REGISTRATION MD-153, VARIATION AC, REF NOTE 6, DATE 7/93.
- B. DIMENSIONS ARE IN MILLIMETERS.
- C. DIMENSIONS ARE EXCLUSIVE OF BURRS, MOLDS FLASH, AND TIE BAR EXTRUSIONS.
- D. DIMENSIONS AND TOLERANCES PER ANSI Y14.5M, 1982.

# 0.09-0.20<sup>1</sup> R0.09min GAGE PLANE SEATING PLANE R0.09min DETAIL A

SEE DETAIL A

MTC20REVD1

Figure 3. 20-Lead Thin Shrink Small Outline Package (TSSOP), JEDEC MO-153, 4.4mm Wide Package Number MTC20





TinyBuck™

TinyLogic<sup>®</sup>

TINYOPTO™

TinyPower™

TruTranslation™

TinyWire™

SerDes™

UniFET™

UHC®

**VCX**<sup>TM</sup>

Wire™

### **TRADEMARKS**

The following are registered and unregistered trademarks Fairchild Semiconductor owns or is authorized to use and is not intended to be an exhaustive list of all such trademarks.

ACFx® HiSeC™ Power-SPM™ Across the board. Around the world.™ PowerTrench® i-Lo™ ActiveArray<sup>™</sup> ImpliedDisconnect™ Programmable Active Droop™ Bottomless™ IntelliMAX™ **QFET** Build it Now™ QS<sup>TM</sup> ISOPLANAR™ CoolFET™ MICROCOUPLER™ QT Optoelectronics™ CorePLUS™ Quiet Series™ MicroPak™ RapidConfigure™  $CROSSVOLT^{m}$ MICROWIRE™ CTL™ RapidConnect™ Motion-SPM™ Current Transfer Logic™ MSX™ ScalarPump™ DOME™ MSXPro™ SMART START™ E<sup>2</sup>CMOS<sup>TM</sup> SPM<sup>®</sup>  $OCX^{TM}$  $\mathsf{EcoSPARK}^{^{\circledR}}$ STEALTH™ OCXPro™ EnSigna™ OPTOLOGIC® SuperFET™ FACT Quiet Series™ OPTOPLANAR® SuperSOT™-3 FACT® FAST®  $PACMAN^{TM}$ SuperSOT™-6 PDP-SPM™ SuperSOT™-8 FASTr™ РОР™ SyncFET™ FPS™ Power220®  $\mathsf{TCM}^\mathsf{TM}$  $\mathsf{FRFET}^{\texttt{®}}$ 

Power247® The Power Franchise®

GlobalOptoisolator™ PowerEdge™

**GTO™** PowerSaver™ TinyBoost™

### DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION, OR DESIGN, FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS. THESE SPECIFICATIONS DO NOT EXPAND THE TERMS OF FAIRCHILD'S WORLDWIDE TERMS AND CONDITIONS, SPECIFICALLY THE WARRANTY THEREIN, WHICH COVERS THESE PRODUCTS.

### LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.

### As used herein:

- 1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
- 2. A critical component in any component of a life support, device, or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

### PRODUCT STATUS DEFINITIONS

### **Definition of Terms**

Datasheet Identification	Product Status	Definition
Advance Information	Formative or In Design	This datasheet contains the design specifications for product development. Specifications may change in any manner without notice.
Preliminary	First Production	This datasheet contains preliminary data; supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve design.
No Identification Needed	Full Production	This datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve design.
Obsolete	Not In Production	This datasheet contains specifications on a product that has been discontinued by Fairchild Semiconductor. The datasheet is printed for reference information only.

Rev. 127

ON Semiconductor and III) are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at <a href="www.onsemi.com/site/pdf/Patent-Marking.pdf">www.onsemi.com/site/pdf/Patent-Marking.pdf</a>. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages.

Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ON Semiconductor was negligent regarding the design or manufacture of the part. ON Semiconductor is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

### **PUBLICATION ORDERING INFORMATION**

### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor 19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada Email: orderlit@onsemi.com

N. American Technical Support: 800-282-9855 Toll Free Europe, Middle East and Africa Technical Support: Phone: 421 33 790 2910 Japan Customer Focus Center

Phone: 81-3-5817-1050

ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative