imall

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832 Email & Skype: info@chipsmall.com Web: www.chipsmall.com Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





Is Now Part of



ON Semiconductor®

To learn more about ON Semiconductor, please visit our website at <u>www.onsemi.com</u>

ON Semiconductor and the ON Semiconductor logo are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor dates sheds, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor dates sheds and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights of others. ON Semiconductor products are not designed, intended, or authorized for use on similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor and its officers, employees, subsidiaries, affliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out or i, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ON Semiconduc



74VHCT540A Octal Buffer/Line Driver with 3-STATE Outputs

Features

- High Speed: t_{PD} = 5.4ns (Typ.) at V_{CC} = 5V
- Low Power Dissipation: $I_{CC} = 4\mu A$ (Max.) at $T_A = 25^{\circ}C$
- Power down protection is provided on all inputs and outputs
- Pin and function compatible with 74HCT540

General Description

The VHCT540A is an advanced high-speed CMOS device fabricated with silicon gate CMOS technology. It achieves the high-speed operation similar to equivalent Bipolar Schottky TTL while maintaining the CMOS low power dissipation.

The VHCT540A is an octal buffer/line driver designed to be employed as memory and address drivers, clock drivers and bus oriented transmitter/receivers.

This device is similar in function to the VHCT240A while providing flow-through architecture (inputs on opposite side from outputs). This pinout arrangement makes this device especially useful as an output port for microprocessors, allowing ease of layout and greater PC board density.

Protection circuits ensure that 0V to 7V can be applied to the input and output⁽¹⁾ pins without regard to the supply voltage. This device can be used to interface 3V to 5V systems and two supply systems such as battery backup. This circuit prevents device destruction due to mismatched supply and input voltages.

Note:

1. Outputs in OFF-State.


Ordering Information

Order Number	Package Number	Package Dissipation
74VHCT540AM	M20B	20-Lead Small Outline Integrated Circuit (SOIC), JEDEC MS-013, 0.300" Wide
74VHCT540ASJ	M20D	20-Lead Small Outline Package (SOP), EIAJ TYPE II, 5.3mm Wide
74VHCT540AMTC	MTC20	20-Lead Thin Shrink Small Outline Package (TSSOP), JEDEC MO-153, 4.4mm Wide

Surface mount packages are also available on Tape and Reel. Specify by appending the suffix letter "X" to the ordering number. Pb-Free package per JEDEC J-STD-020B.

May 2007


Connection Diagram



Pin Description

Pin Names	Description
$\overline{OE}_1, \overline{OE}_2$	3-STATE Output Enable Inputs
I ₀ —I ₇	Inputs
$\overline{O}_0 - \overline{O}_7$	3-STATE Outputs

Logic Symbol



Truth Table

	Inputs		
OE ₁	OE ₂	I	Outputs
L	L	Н	L
Н	Х	Х	Z
Х	Н	Х	Z
L	L	L	Н

H = HIGH Voltage Level

L = LOW Voltage Level

X = Immaterial

 $\mathsf{Z}=\mathsf{High}\;\mathsf{Impedance}$

Absolute Maximum Ratings

Stresses exceeding the absolute maximum ratings may damage the device. The device may not function or be operable above the recommended operating conditions and stressing the parts to these levels is not recommended. In addition, extended exposure to stresses above the recommended operating conditions may affect device reliability. The absolute maximum ratings are stress ratings only.

Symbol	Parameter	Rating
V _{CC}	Supply Voltage	–0.5V to +7.0V
V _{IN}	DC Input Voltage	–0.5V to +7.0V
V _{OUT}	DC Output Voltage	
	Note 2	–0.5V to +7.0V
	Note 3	–0.5V to V _{CC} + 0.5V
I _{IK}	Input Diode Current	–20mA
I _{OK}	Output Diode Current ⁽⁴⁾	±20mA
I _{OUT}	DC Output Current	±25mA
I _{CC}	DC V _{CC} / GND Current	±75mA
T _{STG}	Storage Temperature	–65°C to +150°C
TL	Lead Temperature (Soldering, 10 seconds)	260°C

Recommended Operating Conditions⁽⁵⁾

The Recommended Operating Conditions table defines the conditions for actual device operation. Recommended operating conditions are specified to ensure optimal performance to the datasheet specifications. Fairchild does not recommend exceeding them or designing to absolute maximum ratings.

Symbol	Parameter	Rating
V _{CC}	Supply Voltage	4.5V to +5.5V
V _{IN}	Input Voltage	0V to +5.5V
V _{OUT}	Output Voltage	
	Note 2	0V to 5.5V
	Note 3	0V to V _{CC}
T _{OPR}	Operating Temperature	–40°C to +85°C
t _r , t _f	Input Rise and Fall Time, $V_{CC} = 5.0V \pm 0.5V$	0ns/V ~ 20ns/V

Notes:

2. When outputs are in OFF-STATE or when $V_{CC} = 0V$.

3. HIGH or LOW state. I_{OUT} absolute maximum rating must be observed.

4. $V_{OUT} < GND$, $V_{OUT} > V_{CC}$ (outputs active).

5. Unused inputs must be held HIGH or LOW. They may not float.

74VHCT540A
A Octal Buffer/Li
3uffer/Line Driver with 3
-STATE
Outputs

						T _A = 25°C		T _A = -40°C to +85°C		
Symbol	Parameter	V _{CC} (V)	Cor	nditions	Min.	Тур.	Max.	Min.	Max.	Units
V _{IH}	HIGH Level Input Voltage	4.5–5.5			2.0			2.0		V
V _{IL}	LOW Level Input Voltage	4.5–5.5					0.8		0.8	V
V _{OH}	HIGH Level Output	4.5	V _{IN} =V _{IH}	$I_{OH} = -50 \mu A$	4.4	4.5		4.4		V
	Voltage		or V _{IL}	$I_{OH} = -8mA$	3.94			3.80		1
V _{OL}	V _{OL} LOW Level Output	4.5	V _{IN} =V _{IH}	$I_{OL} = 50 \mu A$		0.0	0.1		0.1	V
	Voltage			I _{OL} = 8mA			0.36		0.44	1
I _{OZ}	3-STATE Output OFF-STATE Current	5.5		$V_{IN} = V_{IH} \text{ or } V_{IL},$ $V_{OUT} = V_{CC} \text{ or } GND$			±0.25		±2.5	μA
I _{IN}	Input Leakage Current	0–5.5	V _{IN} = 5.5V	$V_{IN} = 5.5V \text{ or GND}$			±0.1		±1.0	μA
I _{CC}	Quiescent Supply Current	5.5	$V_{IN} = V_{CC}$	or GND			4.0		40.0	μA
I _{CCT}	Maximum I _{CC} /Input	5.5	$V_{IN} = 3.4$ Inputs = V	/, Other / _{CC} or GND			1.35		1.50	mA
I _{OFF}	Output Leakage Current	0	V _{OUT} = 5.	5V			0.5		5.0	μA

Noise Characteristics

				T _A :	= 25°C	
Symbol	Parameter	V _{CC} (V)	Conditions	Тур.	Limits	Units
V _{OLP} ⁽⁶⁾	Quiet Output Maximum Dynamic V _{OL}	5.0	$C_L = 50 pF$	1.2	1.6	V
V _{OLV} ⁽⁶⁾	Quiet Output Minimum Dynamic V _{OL}	5.0	$C_L = 50 pF$	-1.2	1.6	V
V _{IHD} ⁽⁶⁾	Minimum HIGH Level Dynamic Input Voltage	5.0	$C_L = 50 pF$		2.0	V
V _{ILD} ⁽⁶⁾	Maximum HIGH Level Dynamic Input Voltage	5.0	$C_L = 50 pF$		0.8	V

Note:

6. Parameter guaranteed by design.


AC Electrical Characteristics


					т	_A = 25°	C		–40°C 85°C	
Symbol	Parameter	V _{CC} (V)	Cond	litions	Min.	Тур.	Max.	Min.	Max.	Units
t _{PLH} , t _{PHL}	Propagation Delay	5.0 ± 0.5		$C_L = 15 pF$		5.4	7.4	1.0	8.5	ns
	Time			$C_L = 50 pF$		5.9	8.4	1.0	9.5	
t _{PZL} , t _{PZH}	3-STATE Output	5.0 ± 0.5	$R_L = 1k\Omega$	$C_L = 15 pF$		8.3	11.3	1.0	13.0	ns
	Enable Time			$C_L = 50 pF$		8.8	12.3	1.0	14.0	
t _{PLZ} , t _{PHZ}	3-STATE Output Disable Time	5.0 ± 0.5	$R_L = 1k\Omega$	$C_L = 50 pF$		9.4	11.9	1.0	13.5	ns
t _{OSLH} , t _{OSHL}	Output to Output Skew	5.0 ± 0.5	(7)	$C_L = 50 pF$			1.0		1.0	ns
C _{IN}	Input Capacitance		V _{CC} = Ope	n		4	10		10	pF
C _{OUT}	Output Capacitance		V _{CC} = 5.0\	/		9				pF
C _{PD}	Power Dissipation Capacitance		(8)			19				pF

Notes:


7. Parameter guaranteed by design. $t_{OSLH} = |t_{PLHmax} - t_{PLHmin}|; t_{OSLH} = |t_{PHLmax} - t_{PHLmin}|$

C_{PD} is defined as the value of the internal equivalent capacitance which is calculated from the operating c urrent consumption without load. Average operating current can be obtained by the equation:
I_{CC} (Opr.) = C_{PD} • V_{CC} • f_{IN} + I_{CC} / 8 (per bit).

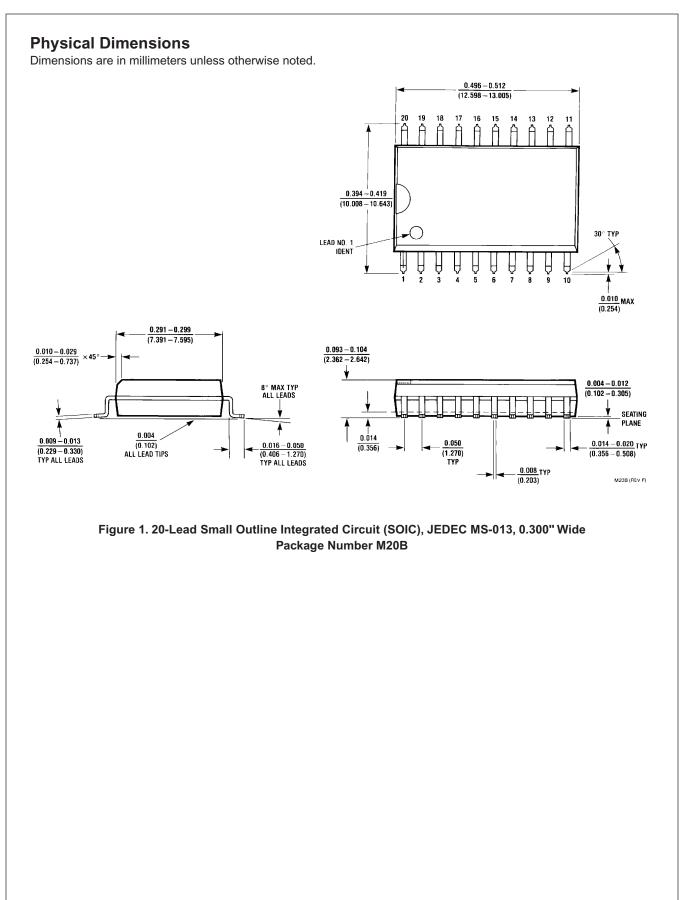

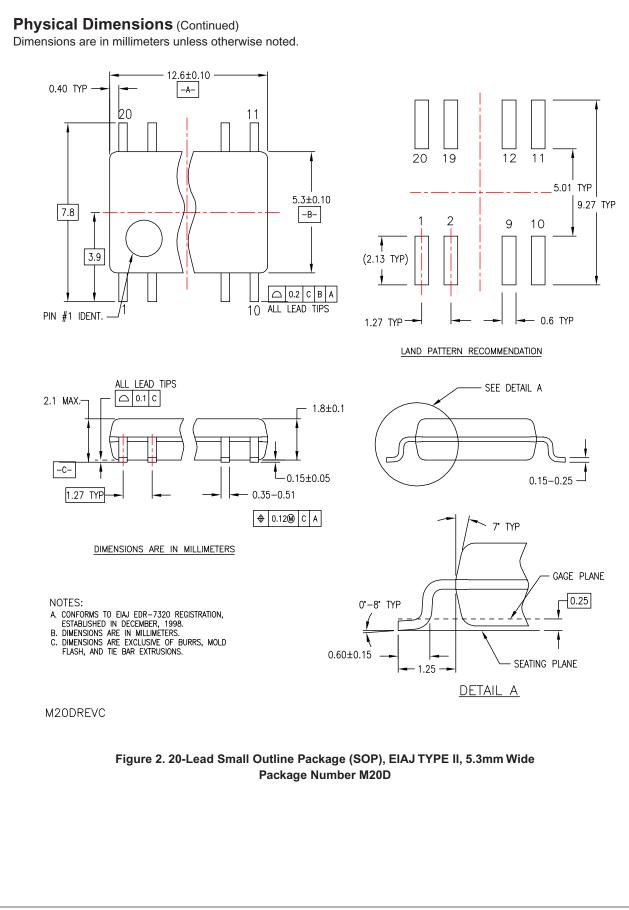

7

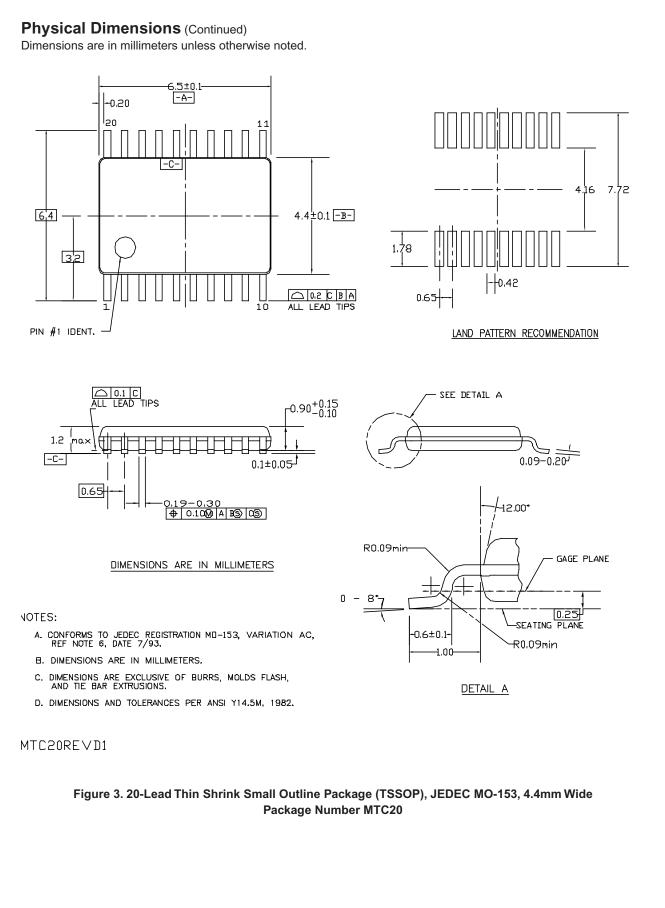

74VHCT540A Octal Buffer/Line Driver with 3-STATE Outputs



74VHCT540A Octal Buffer/Line Driver with 3-STATE Outputs

TRADEMARKS

The following are registered and unregistered trademarks Fairchild Semiconductor owns or is authorized to use and is not intended to be an exhaustive list of all such trademarks.

ACEx [®] Across the board. Around the world. [™] ActiveArray [™] Bottomless [™] Build it Now [™] CoolFET [™] CorePLUS [™] <i>CROSSVOLT[™]</i> CTL [™] Current Transfer Logic [™] DOME [™] E ² CMOS [™] EcoSPARK [®] EnSigna [™] FACT Quiet Series [™] FACT [®] FAST [®] FAST [®] FAST [™] FAST [®] FAST [™] FRFET [®] GlobalOptoisolator [™]	HiSeC [™] <i>i</i> -Lo [™] ImpliedDisconnect [™] IntelliMAX [™] ISOPLANAR [™] MICROCOUPLER [™] MicroPak [™] MICROWIRE [™] Motion-SPM [™] MSX [™] MSXPro [™] OCX [™] OCX [™] OCXPro [™] OCXPro [™] OPTOLOGIC [®] OPTOPLANAR [®] PACMAN [™] PDP-SPM [™] POP [™] Power220 [®] Power247 [®]	Power-SPM [™] PowerTrench [®] Programmable Active Droop [™] QFET [®] QS [™] QT Optoelectronics [™] Quiet Series [™] RapidConfigure [™] RapidConnect [™] ScalarPump [™] SCalarPump [™] SMART START [™] SpM [®] STEALTH [™] SuperFET [™] SuperSOT [™] -6 SuperSOT [™] -6 SuperSOT [™] -8 SyncFET [™] TCM [™] The Power Franchise [®]	TinyBuck™ TinyLogic® TINYOPTO™ TinyPower™ TruTranslation™ SerDes™ UHC [®] UniFET™ VCX™ Wire™
GlobalOptoisolator™ GTO™	PowerEdge™ PowerSaver™	TinyBoost™	
010	FuwerSaver m	IINYBOOSt	

DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION, OR DESIGN, FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS. THESE SPECIFICATIONS DO NOT EXPAND THE TERMS OF FAIRCHILD'S WORLDWIDE TERMS AND CONDITIONS, SPECIFICALLY THE WARRANTY THEREIN, WHICH COVERS THESE PRODUCTS.

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.

As used herein:

- which, (a) are intended for surgical implant into the body or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
- 1. Life support devices or systems are devices or systems 2. A critical component in any component of a life support, device, or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

Datasheet Identification	Product Status	Definition
Advance Information	Formative or In Design	This datasheet contains the design specifications for product development. Specifications may change in any manner without notice.
Preliminary	First Production	This datasheet contains preliminary data; supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve design.
No Identification Needed	Full Production	This datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve design.
Obsolete	Not In Production	This datasheet contains specifications on a product that has been discontinued by Fairchild Semiconductor. The datasheet is printed for reference information only.

PRODUCT STATUS DEFINITIONS

ON Semiconductor and are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at <u>www.onsemi.com/site/pdf/Patent-Marking.pdf</u>. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor has against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death ass

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor 19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada Email: orderlit@onsemi.com N. American Technical Support: 800–282–9855 Toll Free USA/Canada Europe, Middle East and Africa Technical Support: Phone: 421 33 790 2910

Japan Customer Focus Center Phone: 81-3-5817-1050 ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative

© Semiconductor Components Industries, LLC