imall

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832 Email & Skype: info@chipsmall.com Web: www.chipsmall.com Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China







| FEATURES |
|------------------------------------|
| RoHS compliant |
| Up to 2.8A loc |
| ■ 1.0µH to 2.2mH |
| |
| Small footprint |
| Ultra-low profile |
| UL 94V-0 packaging materials |
| J-STD-020C reflow |
| Custom inductance values available |
| |

PRODUCT OVERVIEW

The 8400 series is a range of miniature, surfacemount, I-core power inductors. They are designed for use in power applications with restricted PCB space and height, such as ExpressCard[™] technology, handheld devices, DC-DC converters and notebook computers. The products are supplied in tape and reel for high-volume, automated surface-mount assembly.



www.murata-ps.com/support

8400 Series

Miniature Surface Mount Power Inductors


| SELECTION GUIDE | | | | |
|-----------------|---------------|-------------------------|---------------|--|
| | Inductance, L | DC Current ² | DC Resistance | |
| Order Code | ±10% | Max. | Max. | |
| | μH | A | Ω | |
| 84102C | 1.0±20% | 2.80 | 0.08 | |
| 84132C | 1.3±20% | 2.50 | 0.08 | |
| 84222C | 2.2±20% | 2.00 | 0.09 | |
| 84332C | 3.3±20% | 1.50 | 0.12 | |
| 84472C | 4.7±20% | 1.30 | 0.15 | |
| 84682C | 6.8±20% | 1.05 | 0.20 | |
| 84103C | 10 | 0.95 | 0.24 | |
| 84153C | 15 | 0.75 | 0.45 | |
| 84223C | 22 | 0.60 | 0.60 | |
| 84333C | 33 | 0.55 | 0.86 | |
| 84473C | 47 | 0.42 | 1.1 | |
| 84683C | 68 | 0.38 | 1.6 | |
| 84104C | 100 | 0.30 | 2.0 | |
| 84154C | 150 | 0.25 | 3.2 | |
| 84224C | 220 | 0.20 | 4.6 | |
| 84334C | 330 | 0.17 | 6.5 | |
| 84474C | 470 | 0.14 | 8.5 | |
| 84684C | 680 | 0.12 | 11.5 | |
| 84105C | 1000 | 0.09 | 18.0 | |
| 84155C | 1500 | 0.08 | 27.0 | |
| 84225C | 2200 | 0.05 | 45 | |

ABSOLUTE MAXIMUM BATINGS

| Operating free air temperature range | -40°C to 125°C |
|--------------------------------------|----------------|
| Storage temperature range | -40°C to 150°C |

| SOLDERING INFORMATION ¹ | |
|------------------------------------|---------|
| Peak reflow solder temperature | 250°C |
| Pin finish | SAC 305 |
| Moisture sensitivity level | 1 |

PACKAGE SPECIFICATIONS

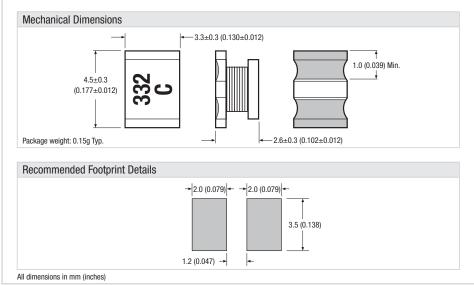


Specifications typical at $T_{A} = 25^{\circ}C$


 For further information, please visit www.murata-ps.com/rohs
The maximum DC current is the value at which the inductance falls to 75% of its nominal value or when its temperature rise reaches 40°C, whichever is sooner.

muRata P. Murata Power Solutions


8400 Series

Miniature Surface Mount Power Inductors

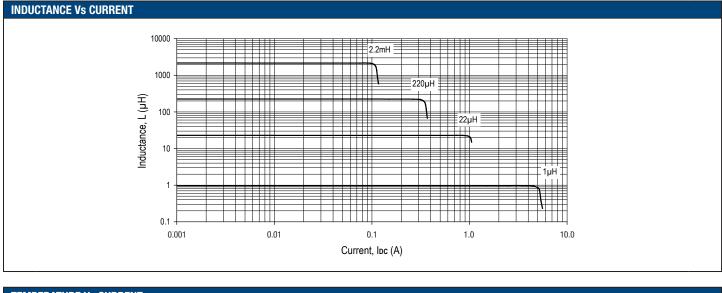

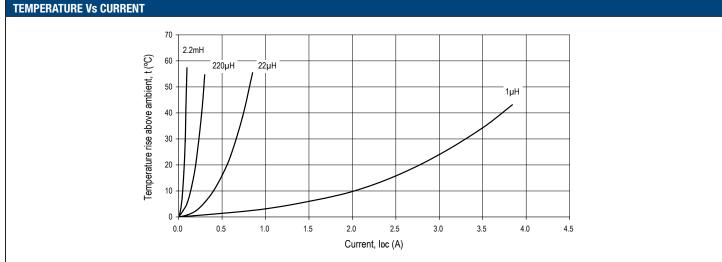

INDUCTANCE Vs FREQUENCY

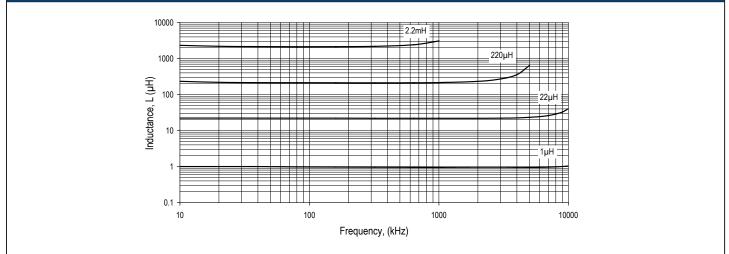




8400 Series

Miniature Surface Mount Power Inductors



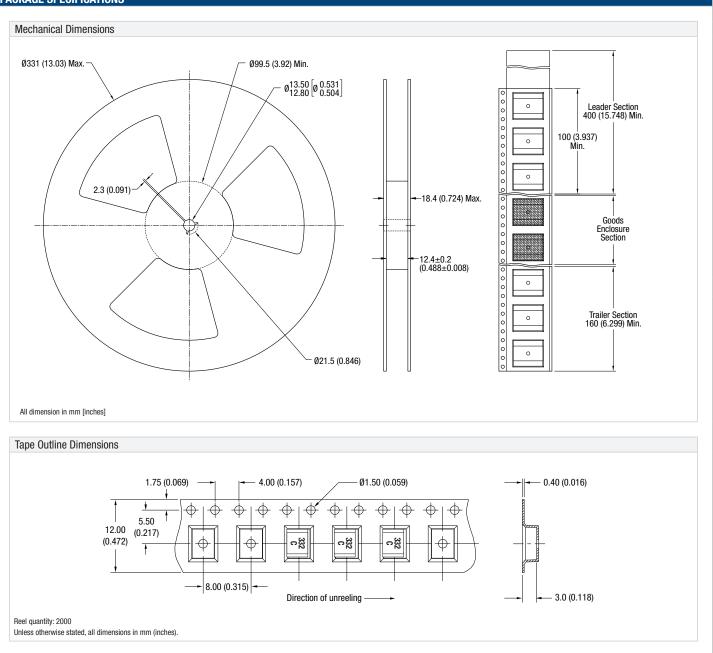

Murata Power Solutions, Inc. 11 Cabot Boulevard, Mansfield, MA 02048-1151 U.S.A. ISO 9001 and 14001 REGISTERED

Murata Power Solutions, Inc. makes no representation that the use of its products in the circuits described herein, or the use of other technical information contained herein, will not infringe upon existing or future patent rights. The descriptions contained herein do not imply the granting of licenses to make, use, or sell equipment constructed in accordance therewith. Specifications are subject to change without notice. © 2012 Murata Power Solutions, Inc.