



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Data Sheet

Models 9122, 9123

Single Output Programmable DC Power Supplies


- Speed
- Power
- High Resolution

The 9120 series power supplies are designed to meet the needs of today's applications in R&D design verification, university labs, production testing, and other applications that require clean/reliable power and excellent performance. With meter resolution of 10mV and 1mA, these power supplies are ideal for low power surface mount circuits that require very precise voltage and current settings.

New microprocessor control circuitry allows these power supplies to offer unmatched temperature stability and remarkably fast transient response times with a load regulation of 0.01% + 3mV. These power supplies are smart enough to power-up in to the same state they were when they were powered off. This allows the units to go back to work as soon as power is restored whether the power-off was intentional or caused by a power outage. There is enough non-volatile memory to store up to 100 power supply settings allowing quick and easy testing when multiple voltage and current values are required.

- 10mV & 1mA display resolution
- RS 232 interface
- GPIB interface model 9123
- SCPI compatible
- Remote sensing
- Front and rear output terminals
- Low noise
- Excellent regulation
- Rock solid temperature stability
- Fast transient response time
- Closed case calibration

Try our Demo online by logging to www.bkprecision.com

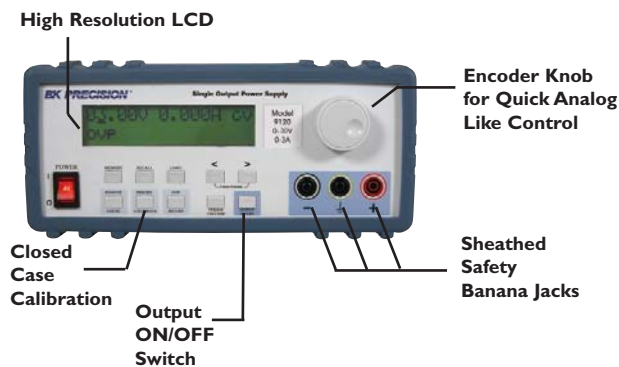

Specifications	Models	
	9122	9123
Output Voltage	0-60V	0-30V
Output Current	0-2.5A	0-5A
Voltage Regulation		
Load (Utilizing Remote Sensing)	≤ 0.01% + 3mV	
Ripple & Noise	≤ 1mVrms & 8mVp-p	≤ 0.05mVrms + 5mVp-p
Metering		
Type	Backlit LCD	
Voltmeter Resolution	10mV	
Voltmeter Accuracy	≤ 0.05% + 5mV	
Current Meter Accuracy	≤ 0.15% + 5mA	
Current Meter Resolution	1mA	