



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




Field Interface Modules



**Passive - 2 wire
16 Channel
Relay Output Fused* w/LED,
MOV, and Circuit Breaker
Allen-Bradley**

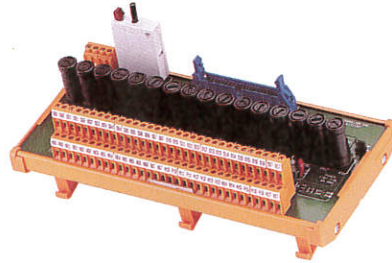

**Passive - 2 wire
16 Channel
Relay Output Fused* w/LED,
MOV, and Circuit Breaker
Allen-Bradley**

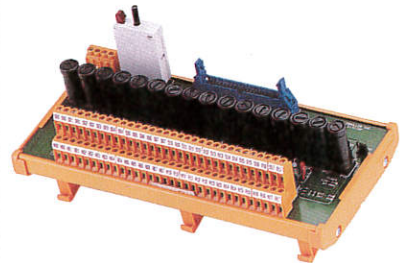

Technical Data

Type	RS PLC DO W/F, W/LD, W/MOV FGI	RS PLC RO W/F, W/LD, W/MOV
Part number	998371 1771-OD16	998214 24-250 VAC 1771-OW16 24-150 VDC 1771-OW16
Rated voltage	120 VAC	See Above
Rated current	2.0 A per channel / 12.0 A per module	2.0 A per channel / 12.0 A per module
Cable connection	(1) 1 x 40 pin IDC	(1) 1 x 40 pin IDC
LED Indicators	No	No
Operating Temperature	0°C...+50°C	0°C...+50°C
Storage Temperature	-20°C...+60°C	-20°C...+60°C
Dimensions LxWxH mm	182 x 109 x 69	218 x 109 x 69
Terminal Wire Size	#26...14 AWG	#26...14 AWG
Terminal Type	Screw Clamp	Screw Clamp
Approvals		

Wiring Schematics

