

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China











FEATURES

- Bluetooth Low Energy (Bluetooth SMART)
 modules fully certified for Bluetooth 4.1
 with on-board support for profiles
 including Battery Status, Blood pressure
 monitor, Proximity, Thermometer,
 Glucose and many more.
- Small size enables integration into most sensor products and applications
- ARM® Cortex™ M3-based microprocessor core
- Programmable RF transmit power control and on-board PCB-style antenna
- Powered directly from a battery or mains supply
- Secure Over-the-Air (OTA) software update using industry-standard AES-128 security
- Easily integrated into existing or new products using TruConnect, ACKme's configurable Bluetooth Low Energy application (pre-installed on every module)
- Custom application development on the module with the Broadcom WICED® Smart Software Development Kit

APPLICATIONS

- Wireless serial cable replacement
- Health & Fitness equipment including heart rate monitors, blood pressure, thermometers, pedometers, weight scales
- Retail advertising and beaconing, proximity detection, point-of-sale
- Control, automation, security and monitoring of environmental data
- · Consumer: Toys, robots, remote controls

AMS001/AMS002 'Bobcat'

Bluetooth Low-Energy: The 'Smart' Solution

Add ultra-low power wireless connectivity to your application in a heartbeat

GET TO MARKET, FAST!

The 'Bobcat' family of Bluetooth SMART modules from ACKme Networks vastly reduces development effort and fast-tracks your latest wireless product to market.

HIGHLIGHTS

The AMS001/AMS002 'Bobcat' family of modules are fully certified small form factor, ultra-low power and low-cost Bluetooth Low Energy (Bluetooth SMART) modules perfectly suited to battery and powered operation for medium to high-volume applications. Both modules have identical specifications, with the AMS001 offering ultra-low power, and the AMS002 offering the lowest cost.


All modules provides an integrated Bluetooth Low Energy stack, support over the air (OTA) upgrade in conjunction with the integrated serial Flash, and include an on-board PCB-style antenna all in a physical footprint of just $17.6 \times 11.4 \times 2.4$ mm.

ACKme TruConnect firmware is pre-installed and licensed to run on all Bobcat modules. TruConnect is an easy-to-use application enabling module control and configuration via a UART-serial interface. TruConnect virtually eliminates difficult and time-consuming software development effort and vastly reduces product development cycles.

For customers that prefer to write a custom application replacing TruConnect, ACKme provides support for on-module development using the WICED Smart Software Development Kit from Broadcom®.

SYSTEM ARCHITECTURE



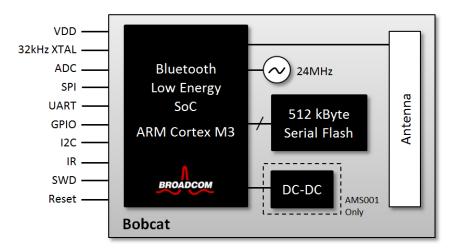

AMS001/AMS002 SPECIFICATIONS


Wireless Standard	Bluetooth version 4.1					
Frequency Band	2400 – 2500 MHz					
Bluetooth Smart Use Cases	Wireless cable replacement, Battery status, Blood pressure monitor, Proximity, Thermometer, Glucose meter, plus many more					
Communications Interfaces	UART, SPI, I2C, SWD					
Peripherals	GPIO, ADC, PWM					
Data Throughput	270 kbit/s over-the air; 85 kbit/s wireless UART					
Microprocessor & Memory	ARM Cortex-M3 with 60kB RAM (when used with the WICED Smart SDK)					
Max. RF Transmit Power	+4 dBm (max)					
Receive Sensitivity	-94 dBm					
Communications Range	>50m (150ft)	>50m (150ft) line of sight				
Antenna	Integrated PCB-style					
		Deep Sleep : 0.65 μA Sleep : 12 μA				
Power Consumption @ 3.0V, 25°C		0.65 μΑ				
Power Consumption @ 3.0V, 25°C		0.65 μA Active Rx (mA)	Active Tx (mA)	Lowest Power	Lowest Cost	
Power Consumption @ 3.0V, 25°C			Active Tx (mA)	Lowest Power ✓	Lowest Cost	
Power Consumption @ 3.0V, 25°C	Sleep : 12 μA	Active Rx (mA)	, ,	Lowest Power ✓	Lowest Cost	
Power Consumption @ 3.0V, 25°C Supply Voltage	Sleep : 12 μA AMS001	Active Rx (mA)	10.8	Lowest Power ✓	Lowest Cost	
	Sleep : 12 μA AMS001 AMS002	Active Rx (mA) 12.8 26.6	10.8	Lowest Power ✓	Lowest Cost ✓	
Supply Voltage	Sleep: 12 μA AMS001 AMS002 1.8V – 3.6V -30°C to +85°C	Active Rx (mA) 12.8 26.6	10.8 22.0	Lowest Power	Lowest Cost	
Supply Voltage Operating Temperature	Sleep: 12 μA AMS001 AMS002 1.8V – 3.6V -30°C to +85°C	Active Rx (mA) 12.8 26.6	10.8 22.0	Lowest Power	Lowest Cost ✓	
Supply Voltage Operating Temperature Size	Sleep: 12 μA AMS001 AMS002 1.8V – 3.6V -30°C to +85°C 17.6 x 11.4 x 2 FCC, CE, IC	Active Rx (mA) 12.8 26.6	10.8 22.0 45 x 0.10 inches)	√	✓	

EVALUATION BOARDS

Evaluating the Bobcat family of modules using ACKme's TruConnect serial Bluetooth software is easy. Simply plug the board into a PC using a standard USB cable, open a terminal and start typing!

The evaluation board includes:

- USB-serial interface for simplified UART communications
- Four different power supply options including 3V lithium coin cell,
 Li-Po battery (with integrated charging circuit), external 3.3V and USB
- Peripheral interface including two buttons, five LEDs for I/O control and status indication, speaker for audio output and a thermistor for temperature measurement
- Expansion headers to break out every pin on the module
- Reset button
- Works with yACKme iOS App



Wahoo Evaluation Board





Or for more information, visit us online at http://ack.me

AMS001 (Bobcat LP)	AMS001 Ultra-low power surface mount module
AMS002 (Bobcat LC)	AMS002 Low power, lowest cost surface mount module
AMS001-E01 (Wahoo)	AMS001 Surface-mounted on Wahoo Evaluation Board



ABOUT ACKme NETWORKS, INC.

ACKme Networks offers a range of industry leading cloud-connected wireless communication modules including Wi-Fi, Bluetooth, Bluetooth Low Energy and GPRS cellular. ACKme is headquartered in Silicon Valley, USA with a design centre in Sydney, Australia and a range of international distributors.