imall

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832 Email & Skype: info@chipsmall.com Web: www.chipsmall.com Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Angle Position Sensors

ANG Sensors

Thin, programmable, non-contact magnetic position sensors capable of continuous rotation, with dual outputs available.



Description

The ANG Series sensors are non-contact, intrinsically linear position sensors with one or two independent (redundant) outputs. The sensors operate through the use of Hall Effect technology with magnetic fields generated by permanent magnets. They provide a linear change in voltage output (ratiometric to the input voltage) corresponding to an angular rotation of the input shaft.

Actuator magnet part number AS500106 is required to assure proper operation (ordered separately).

Features

- Angular position sensor with high tolerance for misalignment
- Non-contact angular position sensing and full 360° rotation
- Custom programming available for: angle range, slope, PWM output contact factory
- · No mechanical interface means no parts to wear out or jam
- Comes with 20 AWG 305 mm (12") discrete wire leads
- RoHS Compliant
- IP68*
- Maximum air gap of 6 mm (0.24")
- Compliant to industrial/automotive EMC/EMI/ESD directives

Typical Applications

- Hydraulic valves
- Hydraulic controls
- Electric drives
- Pneumatic controls
- Zero-contact encoder alternative
- Gear selection / shifting position
- Lifting / ride height position
- Throttle / pedal position
- Steering wheel position

Environmental Specifications

| Operating Temperature | -40 °C to 140 °C (-40 °F to 284 °F) | |
|--|-------------------------------------|--|
| Ingress Protection | IP68* | |
| **Contact ZF for details on testing conditions | | |

Electrical Specifications

| Maximum Overvoltage | Reverse Battery Protection | |
|---|--|--|
| 16 VDC 12 VDC | | |
| 0.5 – 4.5 VDC (with 5 VDC input) | | |
| Single output | 8 mA typ., 10 mA max. | |
| Dual output | 16 mA typ., 20 mA max. | |
| 12 bit | | |
| ccuracy, overall Programmed angle sensing range 35° < 65° : ± 2.5% Full scale | | |
| Programmed angle sensing range: $65^{\circ} < 360^{\circ}$: $\pm 2.0\%$ Full scale | | |
| Output Linearity Programmed angle sensing range 35° < 65° : ± 2.5% Full scale | | |
| Programmed angle sensing range: $65^{\circ} < 360^{\circ} : \pm 1.0\%$ Full scale | | |
| | 16 VDC 0.5 – 4.5 VDC (with 5 VDC input) Single output Dual output 12 bit Programmed angle sensing range 35° < Programmed angle sensing range 35° < | |


Mechanical Specifications

| Measuring Range | 0° to 360°, customizable (see graph) |
|-----------------|---|
| Air Gap | 1 mm to 6 mm (application dependent); 2.5 mm typ. |
| Eccentricity | ± 2 mm (0.08") |





| Products | | |
|-------------|---------------|--------------------------------------|
| Part Number | Output | Interface |
| ANG-11HAW1 | Analog single | 20 AWG x 305 mm (12") discrete wires |
| ANG-21HAW1 | Analog dual | 20 AWG x 305 mm (12") discrete wires |

Typical Output vs. Angular Rotation (as percentage of input)

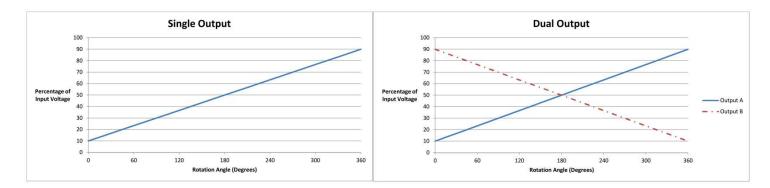

Dimensions mm (inches)

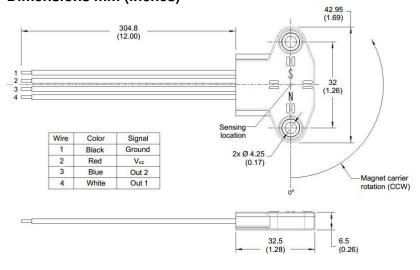

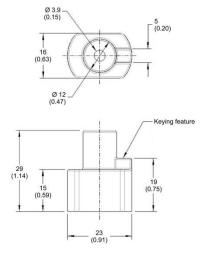



www.cherryswitches.com

