

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China








CD CRIMP TYPE CONNECTOR

General

The model CD connectors are SM Series (sub-miniature) rectangular multi-contact crimping connectors.

CD Crimp Type Connectors are Crimp Type D Subminiature Connectors for Discrete Wire Terminations.

Available in 9, 15, 25 and 37 way. Terminals available for AWG28 through AWG20. Plug with Grounding dimples is introduced now.

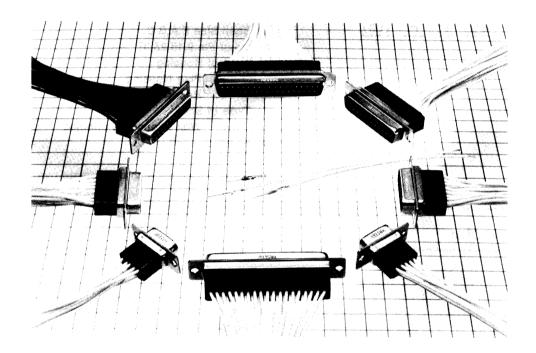

Features

- (1) Compact and sturdy due to metal shell.
- (2) Can be mounted on the front or back of a panel or chasis as necessary.
- (3) Requires no special withdrawal jig (push the retain-
- ers from the connector sides to insert/withdraw the connector).
- (4) Uses insulation made from highly heat-resistant and chemical-resistant UL synthetic resin.

Applications

Suitable for modems in communications equipment such as computers, peripherals and terminals, control equipment, measuring instruments, and export equipment.


Electrical and Environmental

Electrical and Environmental Characteristics		
Current capacity	3A	
Rated voltage	AC 350V	
Insulation resistance	5000mΩ or higer at DC 500V	
Contact resistance	25m Ω or less at DC 100mA	
Withstand voltage	1 minute at AC 1250Vrms	

Material and finish				
Shell Steel Treatment with dichromate or zinc plating				
Insulator	PBT(GE Valox) *	Black		
Contacts Phosphor bronze Nickel plating + Gold plating				

* UL94V-0


Connector Housing




- (1) Series Name CD: Crimping type
- (2) Shell Size E.A.B.C.
- (3) No.of Pin 9,15,25,37
- (4) Type of Housing
 - P: Plug Housing
 - S: Receptance Housing
- (5) Type of Shell
 - F: With Grounding dimples
- (6) Finish of Shell (05) Nickel plated

Blank:Treatment with dichromate over zinc plating

Male Connector

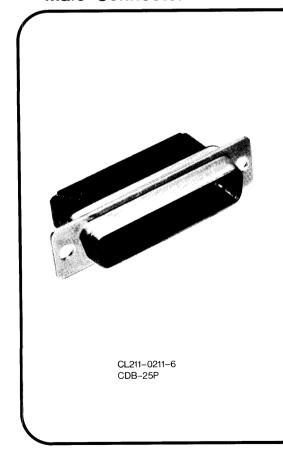


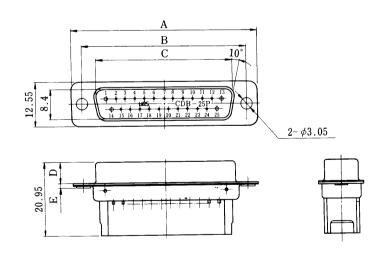


(Unit:mm)

	HRS No.	No.of Pin	Part No.	Α	В	ပ	D	E
*	CL211-0186-0	9	CDE-9P	30.81	24.99	16.9	5.99	1.2
*	CL211-0279-0	15	CDA-15P	39.14	33.32	25.24	5.99	1.2
*	CL211-0211-6	25	CDB-25P	53.04	47.04	39.01	5.87	1.3
*	CL211-0281-1	37	CDC-37P	69.32	63.5	55.47	5.87	1.4

*:Standard

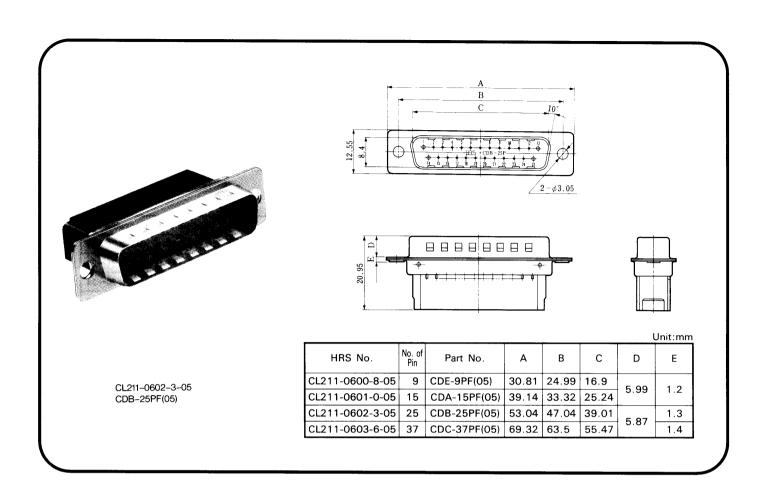


Female Connector

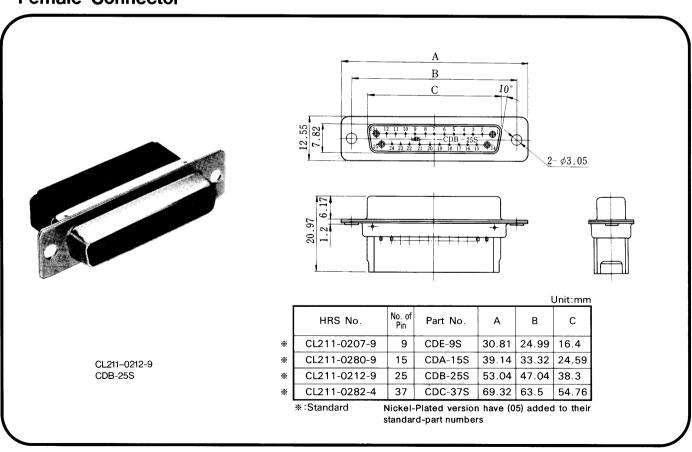

Contact


Male Contact



Item	HRS No.	Part No.	Applicable wire
Loose	CL211-0185-8	CD-PC-111	AWG # 20~24
contact	*CL211-0202-5	CD-PC-121	AWG # 24~28
Chain	*CL211-0200-0	CD-PC-211	AWG # 20~24
contact	*CL211-0201-2	CD-PC-221	AWG # 24~28

*: Standard

Female Contact




Item	HRS No.	Part No.	Applicable wire
Loose	*CL211-0205-3	CD-SC-111	AWG # 20~24
contact	*CL211-0206-6	CD-SC-121	AWG # 24~28
Chain	*CL211-0203-8	CD-SC-211	AWG # 20~24
contact	*CL211-0204-0	CD-SC-221	AWG # 24~28

*: Standard

Note: Loose-Piece terminals are available in Packs. Each Pack contains 100 terminals. Strip terminals are available in reels. Each contains 10,000 terminals


Connector Mounting Method and Mounting Dimensions

Connector mounted on the face of the panel (front mounting)

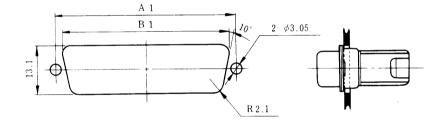

	U	Init: mm
Shell size	A1	B1
E	24.99	22
Α	33.32	30.3
В	47.04	44
С	63.5	60.5


Connector mounted on the back of the panel (rear mounting)

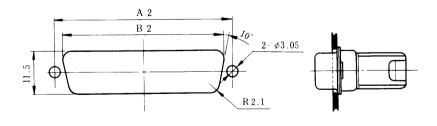

	\	Init: mm
Shell size	A2	B2
E	24.99	20.2
Α	33.32	28.6
В	47.04	42.5
С	63.5	59.2

Assembling Procedure of Crimp Contact


Assembly Steps

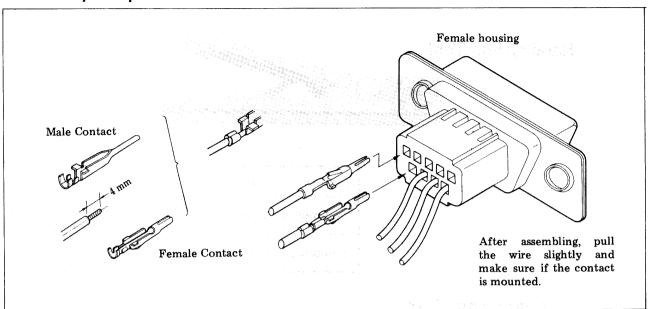

• Procedure for Contact Extraction

In case of extracting a contact from the housing in insertion error or in circuit change, follow the steps as shown below:

- (1) How to extract a contact Insert a 1.1 x 0.5 mm thick board into the lance-fixed-hole of the housing as shown in Fig. 1 and extract the contact by pulling the wire.
- (2) How to raise up a lance When the extracted contact is installed again in the housing, please raise up the contact lance as shown in Fig. 2 and then insert it to the housing.

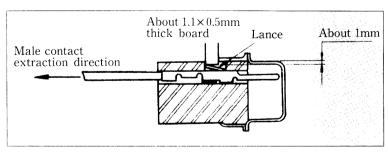


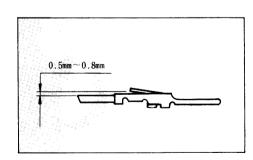


Fig. 1

Fig. 2

Figure 1 illustrates a female terminal. This also applies for a mate terminal.

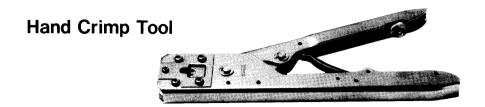

HRS No.	Part No.	Applicable contact	Applicable wire
CL 050 0010 0	TO OD 111	CD-PC-111	AWG-24-20
CL250-0012-2 TC-CD-111		CD-SC-111	(Coating O.D.: \$\phi\$ 1.5- \$\phi\$ 1.9)
01.050-0010-5	TC-CD-101	CD-PC-121	AWG28-24
CL250-0013-5	TC-CD-121	CD-SC-121	(Coating O.D.: \$\phi\$ 1.2-\$\phi\$ 1.5)

Auto Crimp Tool

Crimping machine

HRS No.	Part No.
CL901-0005-4	CM-105

HRS No.	Part No.	Applicable wire
CL901-2517-7	AP105-CD-1	CD-PC-211 SC-211
CL901-2518-0	AP105-CD-2	CD-PC-221 SC-221

