

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China














DUAL OP AMP AND VOLTAGE REFERENCE

Description

The AP4310A is a monolithic IC specifically designed to regulate the output current and voltage levels of switching battery chargers and power supplies

The device contains two Op Amps and a 2.5V precision shunt voltage reference. Op Amp 1 is designed for voltage control with its non-inverting input internally connected to the output of the shunt regulator. Op Amp 2 is for current control with both inputs uncommitted. The IC offers the power converter designer a control solution that features increased precision with a corresponding reduction in system complexity and cost.

The AP4310A is available in SO-8 package.

Features

OP Amp

Notes:

Input Offset Voltage: 0.5mV

Supply Current: 75μA per OP Amp at 5.0V Supply Voltage

Unity Gain Bandwidth:1MHz

Output Voltage Swing: 0 to V_{CC}-1.5V

Power Supply Range: 3 to 36V


Voltage Reference

- Fixed Output Voltage Reference: 2.5V
- Reference Voltage Tolerance :±0.4%
- Sink Current Capability: 0.05 to 80mA
- Typical Output Impedance: 0.2Ω
- Totally Lead-free & Fully RoHS Compliant (Notes 1 & 2)
- Halogen and Antimony Free. "Green" Device (Note 3)

1. No purposely added lead. Fully EU Directive 2002/95/EC (RoHS) & 2011/65/EU (RoHS 2) compliant.

- See http://www.diodes.com/quality/lead_free.html for more information about Diodes Incorporated's definitions of Halogen- and Antimony-free, "Green" and Lead-free.
- 3. Halogen- and Antimony-free "Green" products are defined as those which contain <900ppm bromine, <900ppm chlorine (<1500ppm total Br + Cl) and <1000ppm antimony compounds.


Pin Assignments



Applications

- Battery Charger
- Switching Power Supply


Typical Applications Circuit

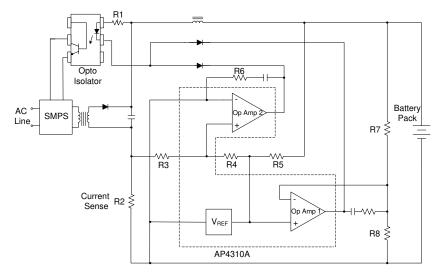

Application of AP4310A in a Constant Current and Constant Voltage Charger



Functional Block Diagram

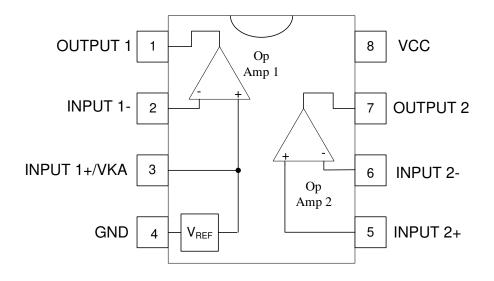

Absolute Maximum Ratings (Note 4)

Symbol	Parameter	Rating	Unit
V _{CC}	Power Supply Voltage (VCC to GND)	40	V
V _{IN}	Op Amp1 and 2 Input Voltage Range (Pins 2, 5, 6)	-0.3 to V _{CC} +0.3	V
V_{ID}	Op Amp 2 Input Differential Voltage (Pins 5, 6)	40	٧
lκ	Voltage Reference Cathode Current (Pin 3)	100	mA
P_{D}	Power Dissipation (T _A = +25°C)	500	mW
TJ	Operating Junction Temperature	+150	°C
T _{STG}	Storage Temperature Range	-65 to +150	°C
T _{LEAD}	Lead Temperature (Soldering 10sec)	+260	°C
ESD	ESD (Human Body Model)	≥2000	V

Note 4: Stresses greater than those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "Recommended Operating Conditions" is not implied. Exposure to "Absolute Maximum Ratings" for extended periods may affect device reliability.

Recommended Operating Conditions

Parameter	Min	Max	Unit
Supply Voltage	3	36	V
Ambient Temperature	-40	+105	°C






Electrical Characteristics (@V_{CC}=5V, T_A=+25°C, unless otherwise specified.)

Para	meters	Conditions		Min	Тур	Max	Unit	
Total Supply Current, excluding Current in Voltage Reference		V _{CC} =5V, no load, -40°C ≤ T _A ≤ +105°C		_	0.15	0.25	mA	
		V _{CC} =30V, no load, -40°C ≤ T _A ≤ +105°C		-	0.20	0.30		
Voltage Reference	Section			•				
Reference Voltage		T _A = +25°C		2.49	2.50	2.51	.,	
		I _K =10mA	-40°C ≤ T _A ≤ +105°C	2.48	2.50	2.52	V	
Reference Voltage I Temperature Range		I _K =10mA, T _A = -40°	°C to +105°C	-	5	24	mV	
	Current for Regulation	_		-	0.01	0.05	mA	
Dynamic Impedance	Э	I _K =1mA to 80mA,	f<1kHz	-	0.2	0.5	Ω	
Op Amp 1 Section	$(V_{CC} = 5V, V_O = 1.4V, T)$	A = +25°C, unless of	therwise noted.)	•			•	
		T _A = +25°C		_	0.5	3		
Input Offset Voltage		$T_A = -40^{\circ}\text{C to } +10^{\circ}$	5°C	-	_	5	mV	
Input Offset Voltage	Temperature Drift	$T_A = -40^{\circ}\text{C to } +10^{\circ}$	5°C	-	7	_	μV/°C	
Input Bias Current (Inverting Input Only)	T _A = +25°C		-	20	150	nA	
Large Signal Voltag	e Gain	$V_{CC} = 15V$, $R_L = 2k\Omega$, $V_O = 1.4V$ to 11.4V		85	100	-	dB	
Power Supply Reject	ction Ratio	V _{CC} = 5V to 30V		70	90	-	dB	
0.4	Source	V _{CC} = 15V, V _{ID} = 1	IV, V _O = 2V	20	40	-	mA	
Output Current	Sink	V _{CC} = 15V, V _{ID} = -	1V, V _O = 2V	5	20	-		
Output Voltage Swin	ng (High)	V _{CC} = 30V, R _L = 1	$0k\Omega$, $V_{ID} = 1V$	27	28	-	V	
Output Voltage Swin	ng (Low)	V _{CC} = 30V, R _L = 1	-	17	100	mV		
Slew Rate		$V_{CC} = 18V, R_L = 2V_{IN} = 0.5V \text{ to } 2V, C$	0.2	0.5	_	V/µs		
Unity Gain Bandwid	th	$V_{CC} = 30V, R_L = 2k\Omega, C_L = 100pF$		0.7	1.0	-	MHz	
Op Amp 2 Section	$(V_{CC} = 5V, V_{O} = 1.4V, T_{O})$	A = +25°C, unless o	therwise noted.)					
		T _A = +25°C		_	0.5	3	\/	
Input Offset Voltage		T _A = -40°C to +105°C		-	-	5	mV	
Input Offset Voltage	Temperature Drift	$T_A = -40^{\circ}\text{C to } +105^{\circ}\text{C}$		_	7	-	μV/°C	
Input Offset Current		T _A = +25°C		_	2	30	nA	
Input Bias Current		T _A = +25°C		_	20	150	nA	
Input Voltage Range	Э	V _{CC} = 0 to 36V		0	_	V _{CC} -1.5	٧	
Common Mode Rejection Ratio		$T_A = +25$ °C, $V_{CM} = 0$ to 3.5V		70	85	-	dB	
Large Signal Voltage Gain		$V_{CC} = 15V$, $R_L = 2k\Omega$, $V_O = 1.4V$ to 11.4V		85	100	-	dB	
Power Supply Rejection Ratio		V _{CC} = 5V to 30V		70	90	_	dB	
Output Current	Source	V _{CC} = 15V, V _{ID} = 1V, V _O = 2V 20 40		40	_	m ^		
	Sink	V _{CC} = 15V, V _{ID} = -	1V, V _O = 2V	5	20	-	mA	
Output Voltage Swing (High)		$V_{CC}=30V,\ R_L=10k\Omega,\ V_{ID}=1V$		27	28	-	٧	
Output Voltage Swing (Low)		V _{CC} = 30V, R _L = 1	_	17	100	mV		
Slew Rate		$V_{CC} = 18V, R_L = 2V_{IN} = 0.5V \text{ to } 2V, C$	0.2	0.5	-	V/µs		
Unity Gain Bandwid	th	V _{CC} = 30V, R _L = 2	0.7	1.0	-	MHz		




Performance Characteristics


Reference Voltage vs. Ambient Temperature




Cathode Current vs. Cathode Voltage



Input Bias Current vs. Ambient Temperature




Op Amp Voltage Gain






Ordering Information

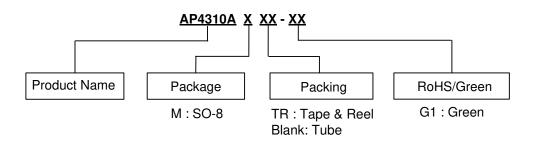

Package	Temperature Range	Reference Voltage	Voltage Tolerance	Part Number	Marking ID	Packing
SO-8 -40 to +105°0	40 + 10500	to +105°C 2.5V	±0.4%	AP4310AM-G1	AP4310AM-G1	100/Tube
	-40 to +105°C			AP4310AMTR-G1	AP4310AM-G1	4000/Tape & Reel

Marking Information





First and Second Lines: Logo and Marking ID

Third Line: Date Code


Y: Year

WW: Work Week of Molding A: Assembly House Code XX: 7th and 8th Digits of Batch No.



Package Outline Dimensions (All dimensions in mm (inch).)

(1) Package Type: SO-8

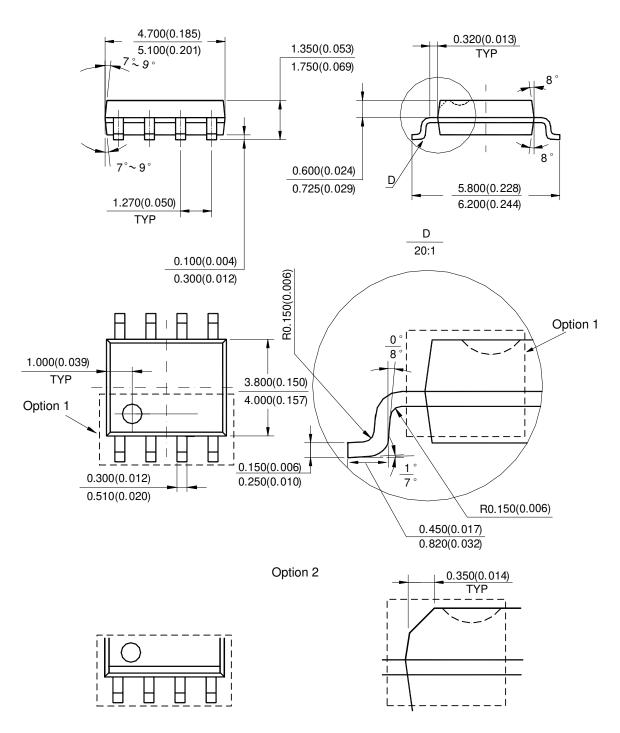


Note: Eject hole, oriented hole and mold mark is optional.



Suggested Pad Layout

(1) Package Type: SO-8

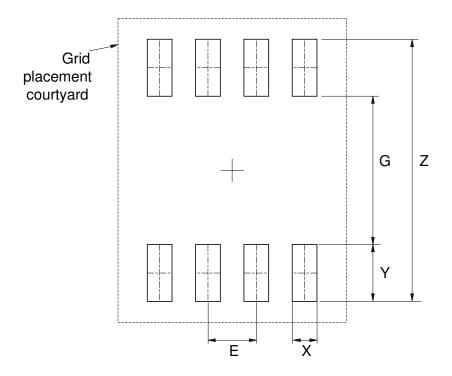

Dimensions	Z	G	X	Y	E
	(mm)/(inch)	(mm)/(inch)	(mm)/(inch)	(mm)/(inch)	(mm)/(inch)
Value	6.900/0.272	3.900/0.154	0.650/0.026	1.500/0.059	1.270/0.050





IMPORTANT NOTICE

DIODES INCORPORATED MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARDS TO THIS DOCUMENT, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION).

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to this document and any product described herein. Diodes Incorporated does not assume any liability arising out of the application or use of this document or any product described herein; neither does Diodes Incorporated convey any license under its patent or trademark rights, nor the rights of others. Any Customer or user of this document or products described herein in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on Diodes Incorporated website, harmless against all damages.

Diodes Incorporated does not warrant or accept any liability whatsoever in respect of any products purchased through unauthorized sales channel. Should Customers purchase or use Diodes Incorporated products for any unintended or unauthorized application, Customers shall indemnify and hold Diodes Incorporated and its representatives harmless against all claims, damages, expenses, and attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized application.

Products described herein may be covered by one or more United States, international or foreign patents pending. Product names and markings noted herein may also be covered by one or more United States, international or foreign trademarks.

This document is written in English but may be translated into multiple languages for reference. Only the English version of this document is the final and determinative format released by Diodes Incorporated.

LIFE SUPPORT

Diodes Incorporated products are specifically not authorized for use as critical components in life support devices or systems without the express written approval of the Chief Executive Officer of Diodes Incorporated. As used herein:

- A. Life support devices or systems are devices or systems which:
 - 1. are intended to implant into the body, or
 - 2. support or sustain life and whose failure to perform when properly used in accordance with instructions for use provided in the labeling can be reasonably expected to result in significant injury to the user.
- B. A critical component is any component in a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or to affect its safety or effectiveness.

Customers represent that they have all necessary expertise in the safety and regulatory ramifications of their life support devices or systems, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of Diodes Incorporated products in such safety-critical, life support devices or systems, notwithstanding any devices- or systems-related information or support that may be provided by Diodes Incorporated. Further, Customers must fully indemnify Diodes Incorporated and its representatives against any damages arising out of the use of Diodes Incorporated products in such safety-critical, life support devices or systems.

Copyright © 2014, Diodes Incorporated

www.diodes.com