# imall

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



# Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832 Email & Skype: info@chipsmall.com Web: www.chipsmall.com Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





#### NOT RECOMMENDED FOR NEW DESIGN USE <u>AP431S</u>



#### LOW CATHODE CURRENT ADJUSTABLE PRECISION SHUNT REGULATOR

### Description

The AP431i is a 3-terminal adjustable shunt regulator with guaranteed thermal stability over a full operation range. It features sharp turn-on characteristics, low temperature coefficient and low output impedance, which makes it ideal substitute for Zener diode in applications such as switching power supply, charger and other adjustable regulators.

The AP431i has the same electrical specifications as the industry standard 431 except that it features a low minimum cathode current for regulation. The typical value of  $50\mu A$  makes the parts ideal for very low power dissipation applications.

The output voltage of AP431i can be set to any value between  $V_{\text{REF}}$  (2.5V/2.495V) and the corresponding maximum cathode voltage (36V).

The AP431i is offered in two grade initial voltage tolerance at +25°C, 0.5% and 1%.


This IC is available in 3 packages: TO-92 (ammo packing), SOT-23 and SOT-89.

#### **Features**

- Low Minimum Cathode Current for Regulation: 50µA (Typ.), 100µA (Max.)
- Programmable Precise Output Voltage from 2.5V/2.495V to 36V
- High Stability Under Capacitive Load
- Low Deviation of Reference Voltage Over Full Temperature Range: 11mV Typical (-40°C to +125°C)
- Sink Current Capacity from 100µA to 100mA
- Low Dynamic Impedance: 0.1Ω (Typ.)
- Wide Operating Temperature Range: -40°C to +125°C
- Totally Lead-Free & Fully RoHS Compliant (Notes 1 & 2)
- Halogen and Antimony Free. "Green" Device (Note 3)



#### **Pin Assignments**

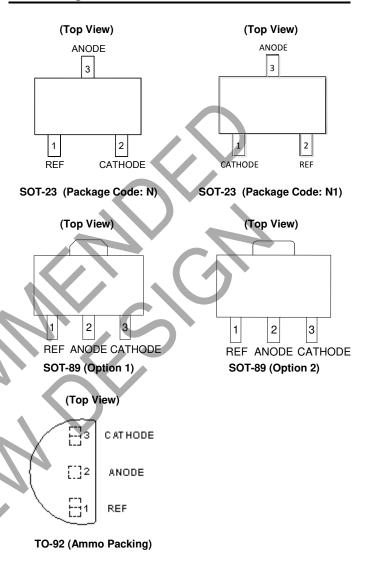


### Applications

- Charger
- Voltage Adapter
- Switching Power Supply
- Graphic Card
- Precision Voltage Reference
- Notes: 1. No purposely added lead. Fully EU Directive 2002/95/EC (RoHS) & 2011/65/EU (RoHS 2) compliant.
  - 2. See http://www.diodes.com/quality/lead\_free.html for more information about Diodes Incorporated's definitions of Halogen- and Antimony-free, "Green" and Lead-free.
  - 3. Halogen- and Antimony-free "Green" products are defined as those which contain <900ppm bromine, <900ppm chlorine (<1500ppm total Br + Cl) and <1000ppm antimony compounds.




# **Typical Applications Circuit**

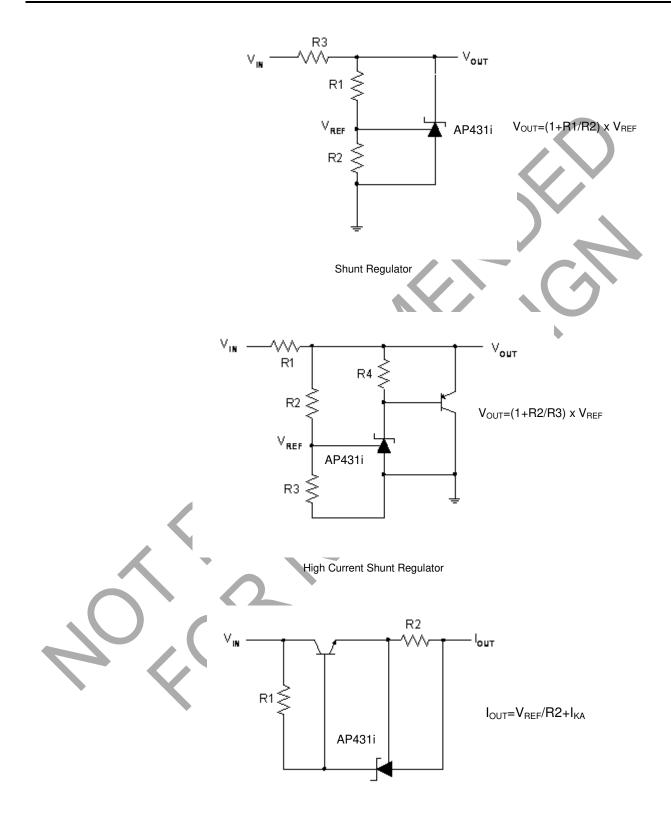

Current Source or Current Limit



# Typical Applications Circuit (Cont.)

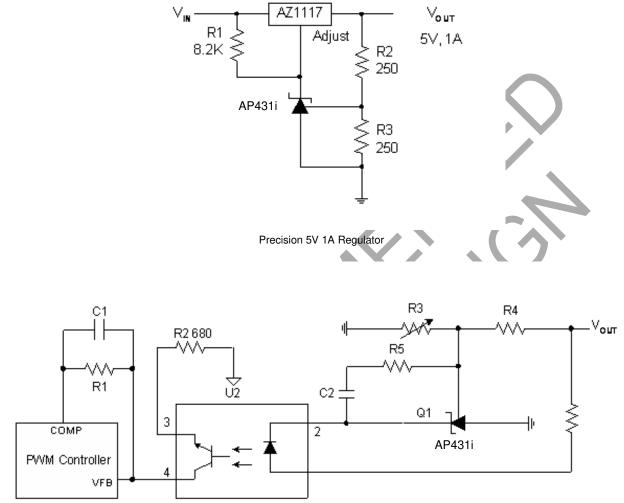


PS521

PWM Converter with Reference



# Functional Block Diagram

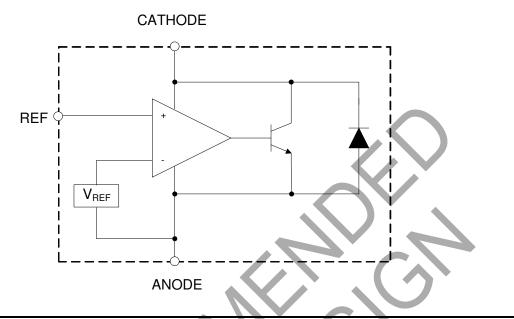

# Absolute Maximum Ratings (Note 4)

Symbol	Parameter	Ratin	Unit		
VKA	Cathode Voltage	40	V		
I <sub>KA</sub>	Cathode Current Range (Continuous)	-100 to	mA		
I <sub>REF</sub>	Reference Input Current Range	10		mA	
		TO-92	750		
P <sub>D</sub>	Power Dissipation	SOT-89	750	mW	
		SOT-23	350		
TJ	Junction Temperature	+150	0	°C	
T <sub>STG</sub>	Storage Temperature Range	-65 to +	150	°C	
ESD	ESD (Human Body Model)	ESD (Human Body Model) 5,500			
ESD	ESD (Machine Model)	300	300		

Note 4: Stresses greater than those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "Recommended Operating Conditions" is not implied. Exposure to "Absolute Maximum Ratings" for extended periods may affect device reliability.

# **Recommended Operating Conditions**

Symbol	Parameter	Min	Max	Unit
Vka	Cathode Voltage	V <sub>REF</sub>	36	V
I <sub>KA</sub>	Cathode Current	0.1	100	mA
T <sub>A</sub>	Operating Ambient Temperature Range	-40	+125	°C




# **Electrical Characteristics** (T<sub>A</sub> = +25°C, unless otherwise specified.)

Symbol	Para	meter	Test Circuit	Conditions		Min	Тур	Max	Unit
		0.50/		$V_{KA} = V_{REF}$ , $I_{KA} = 1mA$ (AP431iA)		2.487	2.500	2.512	
	Reference	0.5%		$V_{KA} = V_{REF, I_K}$	<sub>A</sub> = 1mA (AP431iHA)	2.483	2.495	2.507	v
V <sub>REF</sub>	Voltage	4	4			2.475	2.500	2.525	v
		1.0%		VKA = VREF, IK	<sub>A</sub> = 1mA (AP431iHB)	2.470	2.495	2.520	
	Deviation of I	Beference			0 to +70°C	-	3	6	mV
$\Delta V_{REF}$	Voltage Over	Deviation of Reference Voltage Over Full	4	V <sub>KA</sub> = V <sub>REF</sub> I <sub>KA</sub> = 1mA	-40 to +85°C		6	10	
	Temperature Range	Range		IKA - IIIIA	-40 to +125°C	_	11	18	
	Ratio of Char	•			$\Delta V_{KA}$ = 10V to V <sub>REF</sub>	_	-1.0	-2.7	
$\frac{\Delta V_{REF}}{\Delta V_{KA}}$	Reference Vo Change in Ca Voltage	-	5	$I_{KA} = 1mA$ $\Delta V_{KA} = 36V \text{ to } 10V$		E	-0.5	-2.0	mV/V
IREF	Reference Cu	urrent	5	I <sub>KA</sub> = 1mA, R1		0.2	0.5	μA	
$\Delta I_{REF}$	Deviation of I Current Over Temperature	Full	5	$I_{KA} = 1mA, R1 = 10kΩ$ R2 = ∞, T <sub>A</sub> = -40 to +125°C		)-	0.1	0.3	μΑ
I <sub>KA</sub> (Min)	Minimum Cat for Regulation	hode Current	4	$V_{KA} = V_{REF}$		_	50	100	μA
I <sub>KA</sub> (Off)	Off-state Cat	hode Current	6	V <sub>KA</sub> = 36V, V <sub>REF</sub> = 0		—	0.05	1.0	μA
Z <sub>KA</sub>	Dynamic Imp	edance	4	$V_{KA} = V_{REF},$ $I_{KA} = 1$ to 100mA, f $\leq$ 1.0kHz		_	0.1	0.3	Ω
	Thermal Resistance		TO-92		_	80	_		
θJC		_	SOT-89		_	80	_	°C/W	
				SOT-23		_	140	_	





Electrical Characteristics (Cont.)

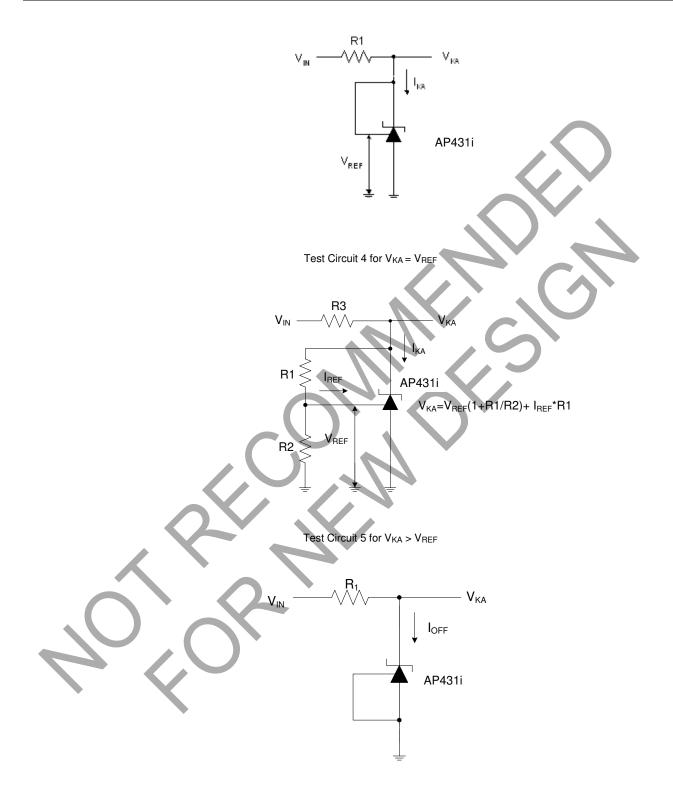


Test Circuit 6 for IOFF




### **Performance Characteristics**


#### Reference Voltage vs. Ambient Temperature




#### Minimal Cathode Current for Regulation




Cathode Current vs. Cathode Voltage




#### **Reference Current vs. Ambient Temperature**



Minimal Cathode Current for Regulation at Different Ambient Temperature




#### Ratio of Delta Reference Voltage to Delta Cathode Voltage vs. Case Temperature





# Performance Characteristics (Cont.)


#### Off-state Cathode Current vs. Ambient Temperature

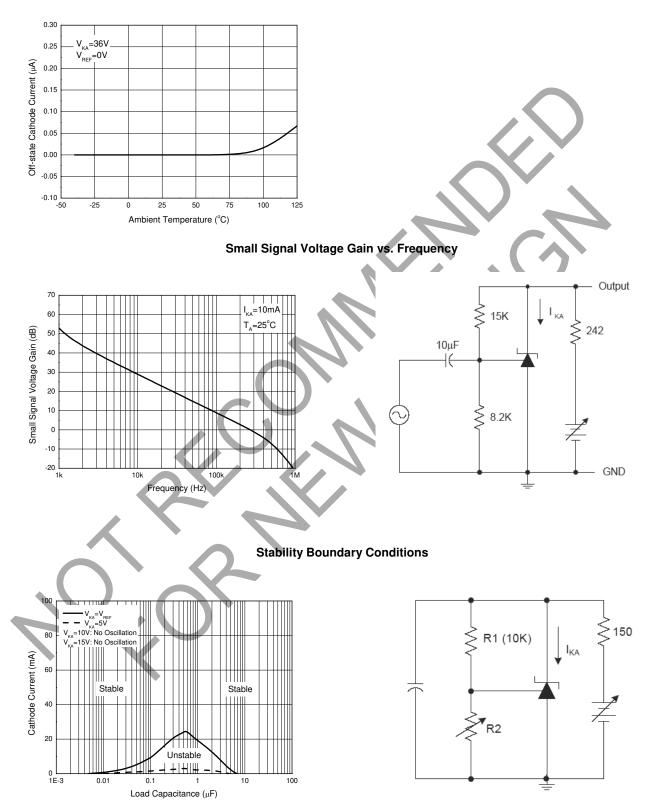



# Performance Characteristics (Cont.)

**Pulse Response** 

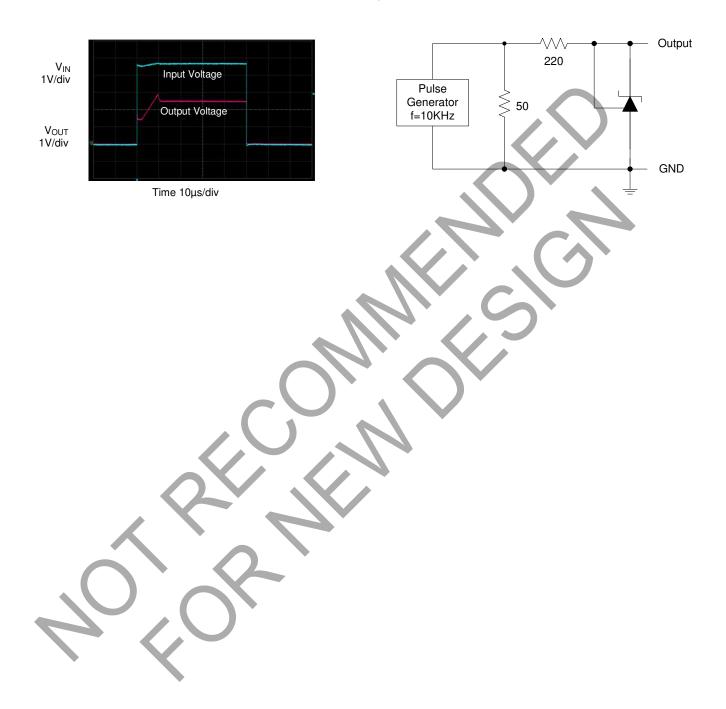




# Ordering Information

Product Name Voltage Tolerance		Package		Packing	RoHS/Green		
		A : 2.5V/ 0.5% B : 2.5V/1.0% HA : 2.495V/0.5% HB : 2.495V/1.0%		SOT-23 TR SOT-89 'O-92	: Tape & Reel or Ammo	G1 : Green	
Package	Package Code	Temperature Range	Voltage Tolerance	Part Number	Marking ID	Packing	
	Ν		0.5%	AP431iANTR-G1	GCA		
	N1		0.5%	AP431iAN1TR-G1 GCC			
SOT-23	Ν		0.5%	AP431iHANTR-G1 GCD			
	N1	-40 to +125°C	0.5%	AP431iHAN1TR-G1 GCE			
	Ν		1.0%	AP431iBNTR-G1	GCB	3,000/Tape & Reel	
	N1		1.0%	AP431iBN1TR-G1	GCF		
	Ν		1.0%	AP431iHBNTR-G1	GCG		
	N1	C	1.0%	AP431iHBN1TR-G1	GCH		
	R		0.5%	AP431iARTR-G1	G33M		
0.07.00	R		0.5%	AP431iHARTR-G1	G37M		
SOT-89	R	-40 to +125°C	1.0%	AP431iBRTR-G1	G33R	1,000/Tape & Reel	
	R	$\sim$ .	1.0%	AP431iHBRTR-G1	G33S		
TO-92	Z		0.5%	AP431iAZTR-G1	AP431iAZ-G1		
	z	10 10 10500	0.5%	AP431iHAZTR-G1	AP431iHAZ-G1	0.000/4	
	Z	-40 to +125°C	1.0%	AP431iBZTR-G1	AP431iBZ-G1	2,000/Ammo	
	z		1.0%	AP431iHBZTR-G1	AP431iHBZ-G1		



# **Marking Information**


#### (1) TO-92 (Ammo Packing)

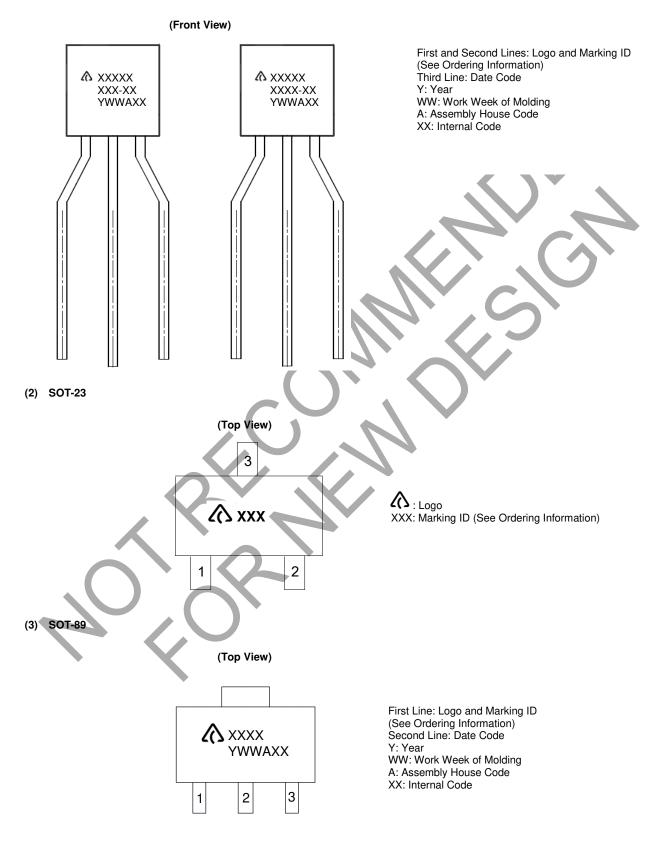



# Package Outline Dimensions (All dimensions in mm (inch).)


#### (1) Package Type: TO-92 (Ammo Packing)

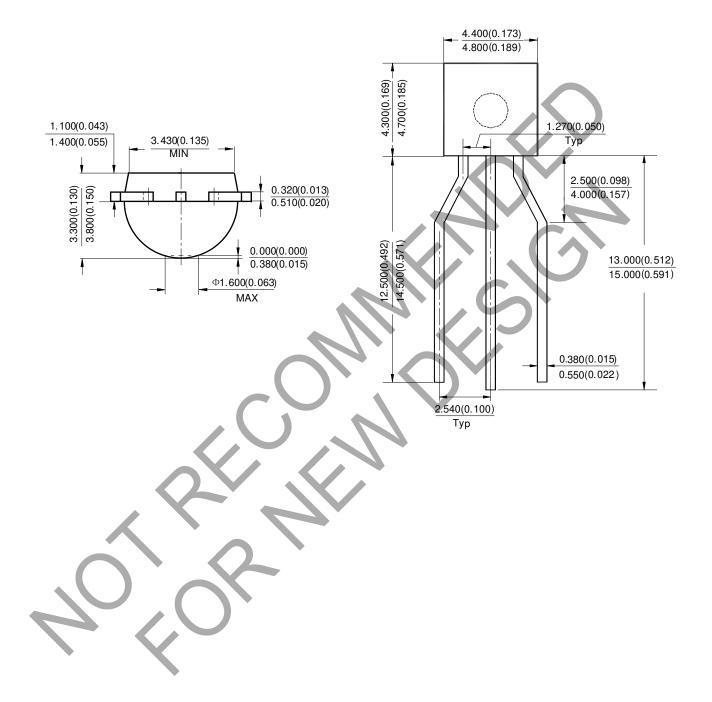



# Package Outline Dimensions (Cont.) (All dimensions in mm(inch).)


#### (2) Package Type: SOT-23

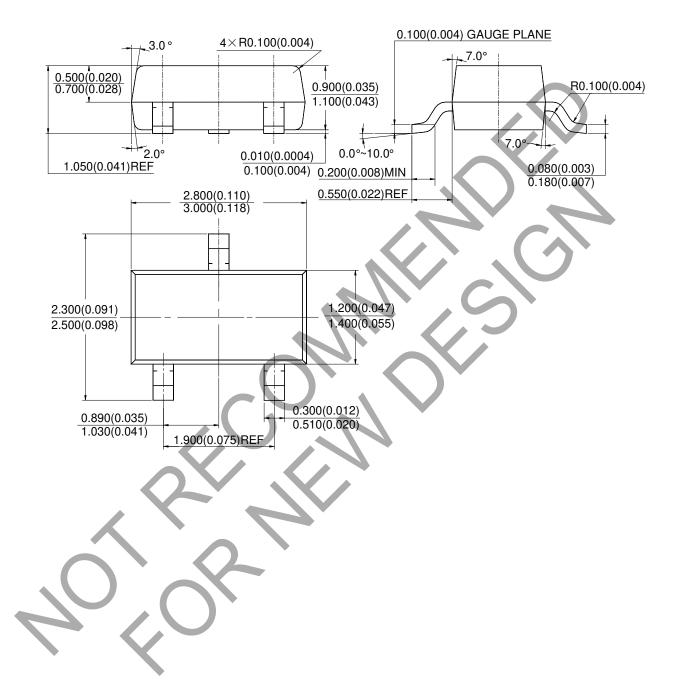



# Package Outline Dimensions (Cont.) (All dimensions in mm(inch).)


#### (3) Package Type: SOT-89

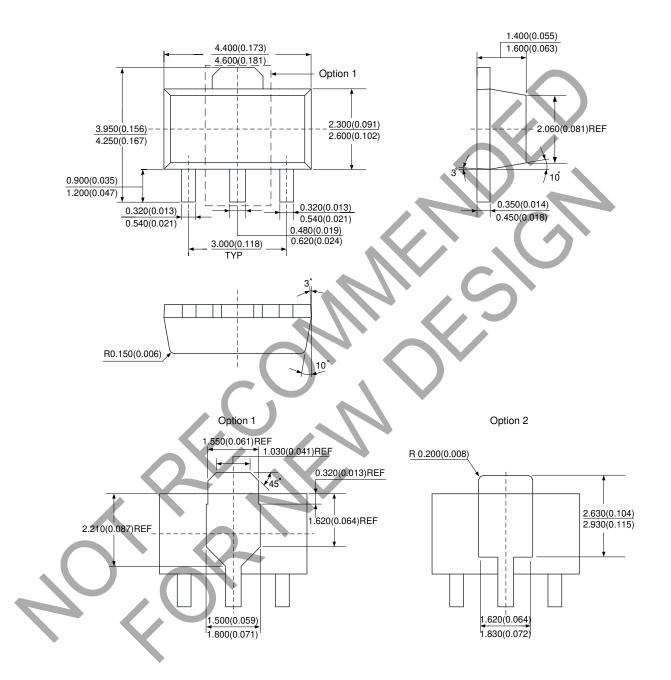



# **Suggested Pad Layout**

#### (1) Package Type: SOT-23

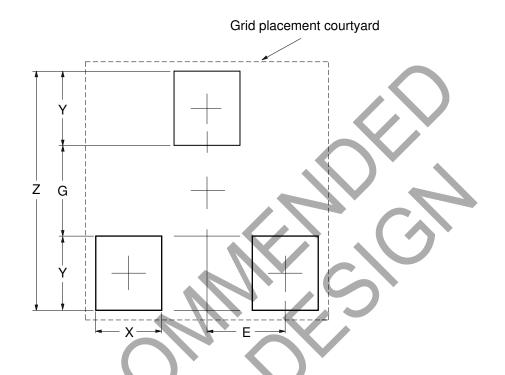


Dimensions	Z	G	X	Y	E
	(mm)/(inch)	(mm)/(inch)	(mm)/(inch)	(mm)/(inch)	(mm)/(inch)
Value	2.900/0.114	1.100/0.043	0.800/0.031	0.900/0.035	0.950/0.037



# Suggested Pad Layout (Cont.)

(2) Package Type: SOT-89

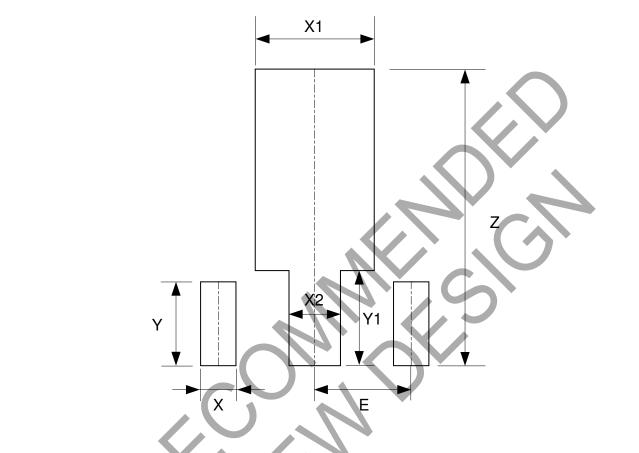

Dimensions	Z	X	X1	X2	Y	Y1	E
	(mm)/(inch)						
Value	4.600/0.181	0.550/0.022	1.850/0.073	0.800/0.031	1.300/0.051	1.475/0.058	1.500/0.059





#### **IMPORTANT NOTICE**

DIODES INCORPORATED MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARDS TO THIS DOCUMENT, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION).

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to this document and any product described herein. Diodes Incorporated does not assume any liability arising out of the application or use of this document or any product described herein; neither does Diodes Incorporated convey any license under its patent or trademark rights, nor the rights of others. Any Customer or user of this document or products described herein in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on Diodes Incorporated website, harmless against all damages.

Diodes Incorporated does not warrant or accept any liability whatsoever in respect of any products purchased through unauthorized sales channel. Should Customers purchase or use Diodes Incorporated products for any unintended or unauthorized application, Customers shall indemnify and hold Diodes Incorporated and its representatives harmless against all claims, damages, expenses, and attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized application.

Products described herein may be covered by one or more United States, international or foreign patents pending. Product names and markings noted herein may also be covered by one or more United States, international or foreign trademarks.

This document is written in English but may be translated into multiple languages for reference. Only the English version of this document is the final and determinative format released by Diodes Incorporated.

#### LIFE SUPPORT

Diodes Incorporated products are specifically not authorized for use as critical components in life support devices or systems without the express written approval of the Chief Executive Officer of Diodes Incorporated. As used herein:

- A. Life support devices or systems are devices or systems which:
  - 1. are intended to implant into the body, or
  - 2. support or sustain life and whose failure to perform when properly used in accordance with instructions for use provided in the labeling can be reasonably expected to result in significant injury to the user.
- B. A critical component is any component in a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or to affect its safety or effectiveness.

Customers represent that they have all necessary expertise in the safety and regulatory ramifications of their life support devices or systems, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of Diodes Incorporated products in such safety-critical, life support devices or systems, notwithstanding any devices- or systems-related information or support that may be provided by Diodes Incorporated. Further, Customers must fully indemnify Diodes Incorporated and its representatives against any damages arising out of the use of Diodes Incorporated products in such safety-critical, life support devices or systems.

Copyright © 2017, Diodes Incorporated

www.diodes.com