

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China










500V, 20A, 0.30Ω Max,Trr ≤ 200nS

N-Channel FREDFET

Power MOS 8^{TM} is a high speed, high voltage N-channel switch-mode power MOSFET. This 'FREDFET' version has a drain-source (body) diode that has been optimized for high reliability in ZVS phase shifted bridge and other circuits through reduced t_{rr} , soft recovery, and high recovery dv/dt capability. Low gate charge, high gain, and a greatly reduced ratio of C_{rss}/C_{iss} result in excellent noise immunity and low switching loss. The intrinsic gate resistance and capacitance of the poly-silicon gate structure help control di/dt during switching, resulting in low EMI and reliable paralleling, even when switching at very high frequency.







FEATURES

- · Fast switching with low EMI
- · Low trr for high reliability
- Ultra low C_{rss} for improved noise immunity
- · Low gate charge
- · Avalanche energy rated
- RoHS compliant

TYPICAL APPLICATIONS

- · ZVS phase shifted and other full bridge
- · Half bridge
- · PFC and other boost converter
- · Buck converter
- · Single and two switch forward
- Flyback

Absolute Maximum Ratings

| Symbol | Parameter | Ratings | Unit |
|-----------------|---|---------|------|
| L | Continuous Drain Current @ T _C = 25°C | 20 | |
| 'D | Continuous Drain Current @ T _C = 100°C | 13 | A |
| I _{DM} | Pulsed Drain Current ^① | 60 | |
| V _{GS} | Gate-Source Voltage | ±30 | ٧ |
| E _{AS} | Single Pulse Avalanche Energy © | 405 | mJ |
| I _{AR} | Avalanche Current, Repetitive or Non-Repetitive | 10 | А |

Thermal and Mechanical Characteristics

| Symbol | Characteristic | Min | Тур | Max | Unit | |
|----------------------------------|--|-----|------|------|--------|--|
| P_{D} | Total Power Dissipation @ T _C = 25°C | | | 290 | W | |
| $R_{\theta JC}$ | Junction to Case Thermal Resistance | | | 0.43 | °C/W | |
| R _{ecs} | Case to Sink Thermal Resistance, Flat, Greased Surface | | 0.15 | | | |
| T _J ,T _{STG} | Operating and Storage Junction Temperature Range | -55 | | 150 | °C | |
| T _L | Soldering Temperature for 10 Seconds (1.6mm from case) | | | 300 | | |
| W _T | Package Weight | | 0.22 | | OZ | |
| | | | 6.2 | | g | |
| Torque | Mounting Torque (TO-247 Package), 6-32 or M3 screw | | · | 10 | in∙lbf | |
| | | | | 1.1 | N∙m | |

| Symbol | Parameter | Test Conditions | | Min | Тур | Max | Unit |
|-----------------------------------|---|---|------|-----|------|------|-------|
| V _{BR(DSS)} | Drain-Source Breakdown Voltage | $V_{GS} = 0V, I_{D} = 250\mu A$ | | 500 | | | V |
| $\Delta V_{BR(DSS)}/\Delta T_{J}$ | Breakdown Voltage Temperature Coefficient | Reference to 25°C, I _D = 250µA | | | 0.60 | | V/°C |
| R _{DS(on)} | Drain-Source On Resistance [®] | $V_{GS} = 10V, I_{D} = 10A$ | | | 0.25 | 0.30 | Ω |
| V _{GS(th)} | Gate-Source Threshold Voltage | $V_{GS} = V_{DS}, I_D = 0.5 mA$ | | 2.5 | 4 | 5 | ٧ |
| $\Delta V_{GS(th)}/\Delta T_{J}$ | Threshold Voltage Temperature Coefficient | | | | -10 | | mV/°C |
| I _{DSS} | Zero Gate Voltage Drain Current | $V_{DS} = 500V$ $T_{J} = 25$ | 5°C | | | 100 | μA |
| | | $V_{GS} = 0V$ $T_{J} = 12$ | 25°C | | | 500 | μΑ |
| I _{GSS} | Gate-Source Leakage Current | $V_{GS} = \pm 30V$ | | | | ±100 | nA |

Dynamic Characteristics

T₁ = 25°C unless otherwise specified


| Ty = 25 C unless otherwise specified | | | | | | | |
|--------------------------------------|--|---|-----|------|-----|------|--|
| Symbol | Parameter | Test Conditions | Min | Тур | Max | Unit | |
| g_{fs} | Forward Transconductance | $V_{DS} = 50V, I_{D} = 10A$ | | 14 | | S | |
| C _{iss} | Input Capacitance | V 0V V 05V | | 2950 | | | |
| C _{rss} | Reverse Transfer Capacitance | $V_{GS} = 0V, V_{DS} = 25V$ f = 1MHz | | 40 | | | |
| C _{oss} | Output Capacitance | | | 320 | | | |
| C _{o(cr)} [⊕] | Effective Output Capacitance, Charge Related | V = 0V V = 0V to 333V | | 185 | | pF | |
| C _{o(er)} ⑤ | Effective Output Capacitance, Energy Related | $V_{GS} = 0V, V_{DS} = 0V \text{ to } 333V$ | | 95 | | | |
| Q_g | Total Gate Charge | V 04-40V I 40A | | 75 | | | |
| Q_{gs} | Gate-Source Charge | $V_{GS} = 0 \text{ to } 10V, I_{D} = 10A,$ $V_{DS} = 250V$ | | 17 | | nC | |
| Q_{gd} | Gate-Drain Charge | V _{DS} = 250V | | 34 | | | |
| t _{d(on)} | Turn-On Delay Time | Resistive Switching | | 13 | | | |
| t _r | Current Rise Time | $V_{DD} = 333V, I_{D} = 10A$ | | 15 | | ne | |
| t _{d(off)} | Turn-Off Delay Time | $R_{G} = 10\Omega^{\textcircled{6}}, V_{GG} = 15V$ | | 34 | | ns | |
| t _f | Current Fall Time | | | 11 | | | |

Source-Drain Diode Characteristics


| Symbol | Parameter | Test Conditions | Min | Тур | Max | Unit |
|-----------------|---|--|-----|------|-----|------|
| Is | Continuous Source Current (Body Diode) | MOSFET symbol showing the | | | 20 | A |
| I _{SM} | Pulsed Source Current (Body Diode) ^① | integral reverse p-n junction diode (body diode) | 7 | | 60 | ^ |
| V _{SD} | Diode Forward Voltage | $I_{SD} = 10, T_{J} = 25^{\circ}C, V_{GS} = 0V$ | | | 1.0 | V |
| t _{rr} | Deverse Beesvery Time | T _J = 25°C | | 175 | 200 | no |
| rr | Reverse Recovery Time | T _J = 125°C | | 310 | 370 | ns |
| Q _{rr} | Reverse Recovery Charge | $I_{SD} = 10A^{\textcircled{3}}$ $T_{J} = 25^{\circ}C$ | | 0.62 | | |
| rr | | $di_{SD}/dt = 100A/\mu s$ $T_J = 125^{\circ}C$ | | 1.47 | | μC |
| 1 | Reverse Recovery Current | $V_{DD} = 100V$ $T_{J} = 25^{\circ}C$ | | 6.6 | | Α |
| 'rrm | | T _J = 125°C | | 8.9 | |] ^ |
| dv/dt | Peak Recovery dv/dt | $I_{SD} \le 10A$, di/dt $\le 1000A/\mu s$, $V_{DD} = 333V$ $T_J = 125^{\circ}C$ | /, | | 20 | V/ns |


- 1) Repetitive Rating: Pulse width and case temperature limited by maximum junction temperature.
- ② Starting at $T_J = 25$ °C, L = 8.10mH, $R_G = 25\Omega$, $I_{AS} = 10$ A.
- (3) Pulse test: Pulse Width < 380µs, duty cycle < 2%.
- C_{o(cr)} is defined as a fixed capacitance with the same stored charge as C_{OSS} with V_{DS} = 67% of V_{(BR)DSS}.
 C_{o(er)} is defined as a fixed capacitance with the same stored energy as C_{OSS} with V_{DS} = 67% of V_{(BR)DSS}. To calculate C_{o(er)} for any value of V_{DS} less than V_{(BR)DSS}, use this equation: C_{o(er)} = -1.05E-7/V_{DS}^2 + 2.44E-8/V_{DS} + 6.99E-11.
- \bigcirc R_G is external gate resistance, not including internal gate resistance or gate driver impedance. (MIC4452)


Microsemi reserves the right to change, without notice, the specifications and information contained herein.

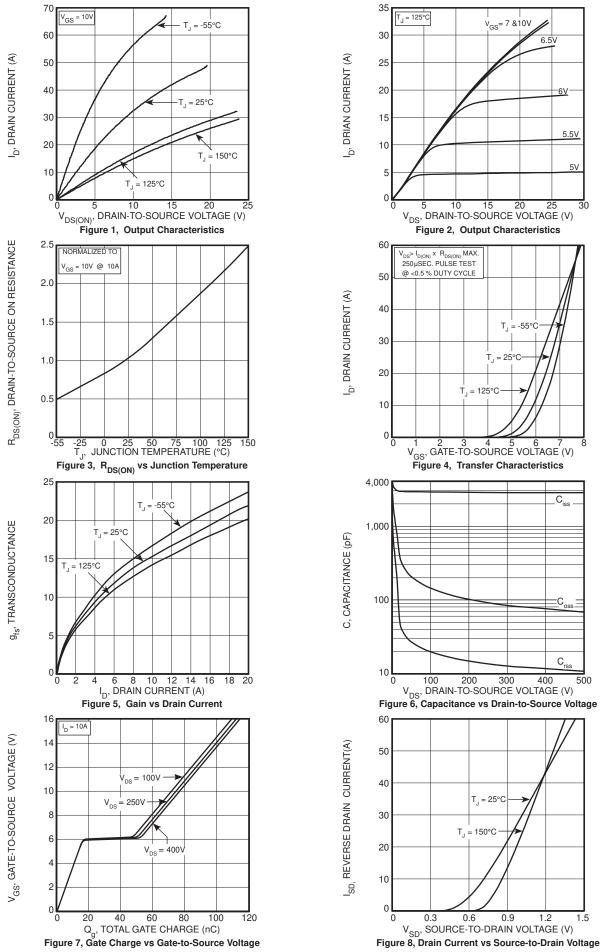

050-8156 Rev D 8-2011






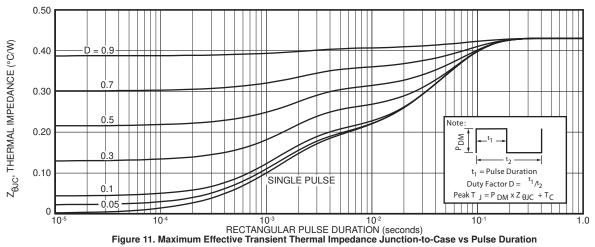

TO-247 (B) Package Outline


@1 SAC: Tin, Silver, Copper



Dimensions in Millimeters (Inches)

D³PAK Package Outline

@3 100% Sn Plated



Dimensions in Millimeters (Inches)