



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com



Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



**Slim type with  
high capacity up to 4A  
DC load type also available**

PhotoMOS®

**Power 1 Form A**  
(AQZ10○, 20○)

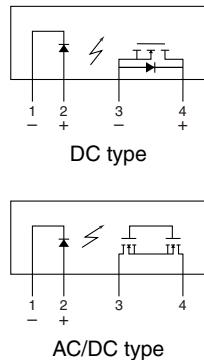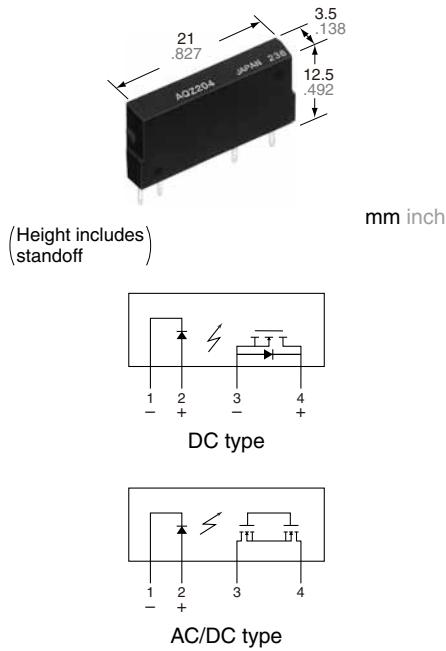

**RoHS compliant**

### FEATURES

1. Slim SIL4-pin package  
(W) 3.5 × (D) 21.0 × (H) 12.5 mm  
(W) .138 × (D) .827 × (H) .492 inch
2. Extremely low on-resistance
3. Control low-level signal  
Power PhotoMOS feature extremely low closed-circuit offset voltage to enable control of low-level analog signals without distortion.
4. Low-level off state leakage current of max. 10 µA
5. High I/O isolation voltage of 2,500 V
6. Eliminates the need for a counter electromotive protection diode in the drive circuit on the input side
7. Eliminates the need for a power supply to drive the power MOSFET
8. No restriction on mounting direction
9. Low thermoelectromotive force
10. Neither noise nor arc at contact
11. Sockets are also available (PA1a-PS, PA1a-PS-H)
12. Can be installed on the RT-3 relay terminal (Power PhotoMOS type)

### TYPICAL APPLICATIONS

- Traffic signals
- Measuring instruments
- Industrial machines

## TYPES

### 1. DC type

	Output rating*		Package	Part No.	Packing quantity	
	Load voltage	Load current			Inner carton	Outer carton
DC only	60 V	4.0 A	SIL4-pin	AQZ102	25 pcs.	500 pcs.
	100 V	2.6 A		AQZ105		
	200 V	1.3 A		AQZ107		
	400 V	0.7 A		AQZ104		

\* Load voltage and current of DC type: DC

### 2. AC/DC type

	Output rating*		Package	Part No.	Packing quantity	
	Load voltage	Load current			Inner carton	Outer carton
AC/DC dual use	60 V	3.0 A	SIL4-pin	AQZ202	25 pcs.	500 pcs.
	100 V	2.0 A		AQZ205		
	200 V	1.0 A		AQZ207		
	400 V	0.5 A		AQZ204		

\* Load voltage and current of AC/DC type: Peak AC/DC.

# Power 1 Form A (AQZ10○, 20○)

## RATING

### 1. DC type

1) Absolute maximum ratings (Ambient temperature: 25°C 77°F)

	Item	Symbol	AQZ102	AQZ105	AQZ107	AQZ104	Remarks
Input	LED forward current	I <sub>F</sub>		50 mA			
	LED reverse voltage	V <sub>R</sub>		5 V			
	Peak forward current	I <sub>FP</sub>		1 A			f = 100 Hz, Duty factor = 0.1%
	Power dissipation	P <sub>in</sub>		75 mW			
Output	Load voltage (DC)	V <sub>L</sub>	60 V	100 V	200 V	400 V	
	Continuous load current (DC)	I <sub>L</sub>	4.0 A	2.6 A	1.3 A	0.7 A	
	Peak load current	I <sub>peak</sub>	9.0 A	6.0 A	3.0 A	1.5 A	100 ms (1 shot), V <sub>L</sub> = DC
	Power dissipation	P <sub>out</sub>		1.35 W			
Total power dissipation		P <sub>T</sub>		1.35 W			
I/O isolation voltage		V <sub>iso</sub>		2,500 V AC			
Temperature limits	Operating	T <sub>opr</sub>	-40°C to +85°C -40°F to +185°F				Non-condensing at low temperatures
	Storage	T <sub>stg</sub>	-40°C to +100°C -40°F to +212°F				

2) Electrical characteristics (Ambient temperature: 25°C 77°F)

	Item	Symbol	AQZ102	AQZ105	AQZ107	AQZ104	Condition
Input	LED operate current	I <sub>Fon</sub>	1.0 mA				I <sub>L</sub> = 100 mA V <sub>L</sub> = 10 V
			3.0 mA				
	LED turn off current	I <sub>Foff</sub>	0.4 mA				I <sub>L</sub> = 100 mA V <sub>L</sub> = 10 V
			0.9 mA				
Output	LED dropout voltage	V <sub>F</sub>	1.25 V (1.16 V at I <sub>F</sub> = 10 mA)				I <sub>F</sub> = 50 mA
			1.5 V				
	On resistance	R <sub>on</sub>	0.05 Ω	0.081 Ω	0.34 Ω	1.06 Ω	I <sub>F</sub> = 10 mA I <sub>L</sub> = Max. Within 1 s on time
			0.09 Ω	0.17 Ω	0.55 Ω	1.6 Ω	
Transfer characteristics	Off state leakage current	I <sub>Leak</sub>	10 μA				I <sub>F</sub> = 0 mA V <sub>L</sub> = Max.
	Turn on time*	T <sub>on</sub>	1.66 ms	1.89 ms	0.83 ms	1.01 ms	I <sub>F</sub> = 10 mA I <sub>L</sub> = 100 mA V <sub>L</sub> = 10 V
			5.0 ms				
			3.79 ms	4.50 ms	1.75 ms	2.34 ms	I <sub>F</sub> = 5 mA I <sub>L</sub> = 100 mA V <sub>L</sub> = 10 V
			10.0 ms				
	Turn off time*	T <sub>off</sub>	0.15 ms	0.19 ms	0.08 ms	0.08 ms	I <sub>F</sub> = 5 mA or 10 mA I <sub>L</sub> = 100 mA V <sub>L</sub> = 10 V
			3.0 ms				
	I/O capacitance	C <sub>iso</sub>	0.8 pF				f = 1 MHz V <sub>B</sub> = 0 V
			1.5 pF				
	Initial I/O isolation resistance	R <sub>iso</sub>	1,000 MΩ				500 V DC
	Maximum operating speed	—	0.5 times/s				I <sub>F</sub> = 10 mA Duty factor = 50% I <sub>L</sub> × V <sub>L</sub> = 200 (VA)
Vibration resistance		Minimum	—	10 to 55 Hz at double amplitude of 3 mm			2 hours for 3 axes
Shock resistance		Minimum	—	4,900 m/s <sup>2</sup> {500 G} 1 ms			3 times for 3 axes

**2. AC/DC type**


1) Absolute maximum ratings (Ambient temperature: 25°C 77°F)

Item		Symbol	AQZ202	AQZ205	AQZ207	AQZ204	Remarks
Input	LED forward current	$I_F$	50 mA				
	LED reverse voltage	$V_R$	5 V				
	Peak forward current	$I_{FP}$	1 A		$f = 100 \text{ Hz, Duty factor} = 0.1\%$		
	Power dissipation	$P_{in}$	75 mW				
Output	Load voltage (Peak AC)	$V_L$	60 V	100 V	200 V	400 V	
	Continuous load current	$I_L$	3.0 A	2.0 A	1.0 A	0.5 A	Peak AC, DC
	Peak load current	$I_{peak}$	9.0 A	6.0 A	3.0 A	1.5 A	100 ms (1 shot), $V_L = \text{DC}$
	Power dissipation	$P_{out}$	1.6 W				
Total power dissipation		$P_T$	1.6 W				
I/O isolation voltage		$V_{iso}$	2,500 V AC				
Temperature limits	Operating	$T_{opr}$	-40°C to +85°C -40°F to +185°F		Non-condensing at low temperatures		
	Storage	$T_{stg}$	-40°C to +100°C -40°F to +212°F				

2) Electrical characteristics (Ambient temperature: 25°C 77°F)

Item		Symbol	AQZ202	AQZ205	AQZ207	AQZ204	Condition
Input	LED operate current	$I_{Fon}$	1.0 mA				$I_L = 100 \text{ mA}$ $V_L = 10 \text{ V}$
			3.0 mA				
	LED turn off current	$I_{Off}$	0.4 mA				$I_L = 100 \text{ mA}$ $V_L = 10 \text{ V}$
			0.9 mA				
Output	LED dropout voltage	$V_F$	1.25 V (1.16 V at $I_F = 10 \text{ mA}$ )				$I_F = 50 \text{ mA}$
			1.5 V				
	On resistance	$R_{on}$	0.11 Ω	0.23 Ω	0.7 Ω	2.1 Ω	$I_F = 10 \text{ mA}$ $I_L = \text{Max.}$ Within 1 s on time
			0.18 Ω	0.34 Ω	1.1 Ω	3.2 Ω	
Transfer characteristics	Off state leakage current	$I_{Leak}$	10 μA				$I_F = 0 \text{ mA}$ $V_L = \text{Max.}$
	Turn on time*	$T_{on}$	2.46 ms	2.40 ms	1.12 ms	1.65 ms	$I_F = 10 \text{ mA}$ $I_L = 100 \text{ mA}$ $V_L = 10 \text{ V}$
			5.0 ms				
			5.64 ms	5.65 ms	2.57 ms	3.88 ms	$I_F = 5 \text{ mA}$ $I_L = 100 \text{ mA}$ $V_L = 10 \text{ V}$
			10.0 ms				
	Turn off time*	$T_{off}$	0.22 ms	0.21 ms	0.10 ms	0.08 ms	$I_F = 5 \text{ mA or } 10 \text{ mA}$ $I_L = 100 \text{ mA}$ $V_L = 10 \text{ V}$
			3.0 ms				
	I/O capacitance	$C_{iso}$	0.8 pF				$f = 1 \text{ MHz}$ $V_B = 0 \text{ V}$
			1.5 pF				
	Initial I/O isolation resistance	$R_{iso}$	1,000 MΩ		500 V DC		
	Maximum operating speed	—	0.5 cps		$I_F = 10 \text{ mA}$ Duty factor = 50% $I_L = \text{Max.}, V_L = \text{Max.}$		
Vibration resistance		Minimum	—		10 to 55 Hz at double amplitude of 3 mm		2 hours for 3 axes
Shock resistance		Minimum	—		4,900 m/s² (500 G) 1 ms		3 times for 3 axes

\*Turn on/off time

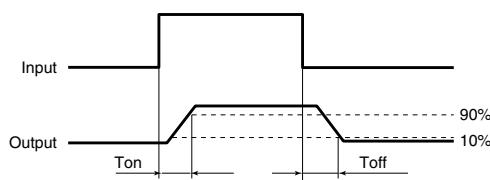**RECOMMENDED OPERATING CONDITIONS**

Please obey the following conditions to ensure proper device operation and resetting.


Item	Symbol	Recommended value	Unit
Input LED current	$I_F$	5 to 10	mA

■ These products are not designed for automotive use.


If you are considering to use these products for automotive applications, please contact your local Panasonic Corporation technical representative.

## REFERENCE DATA


1.-(1) Load current vs. ambient temperature characteristics (DC type)  
Allowable ambient temperature:  $-40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$   
 $-40^{\circ}\text{F}$  to  $+185^{\circ}\text{F}$

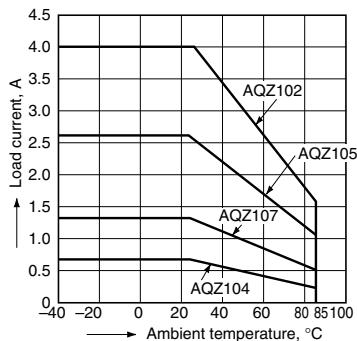


1.-(2) Load current vs. ambient temperature characteristics (AC/DC type)  
Allowable ambient temperature:  $-40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$   
 $-40^{\circ}\text{F}$  to  $+185^{\circ}\text{F}$

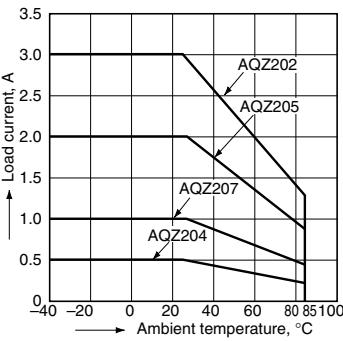


2. Load current vs. ambient temperature characteristics in adjacent mounting  
 $I_L$ : Load current;  
 $I_{L(\max)}$ : Maximum continuous load current

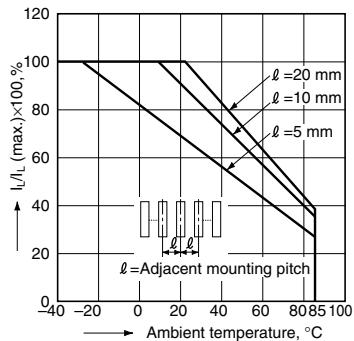


3.-(1) On resistance vs. ambient temperature characteristics (DC type)  
LED current: 10 mA;  
Continuous load current: 1.6 A (DC) (AQZ102),  
1.04 A (DC) (AQZ105)

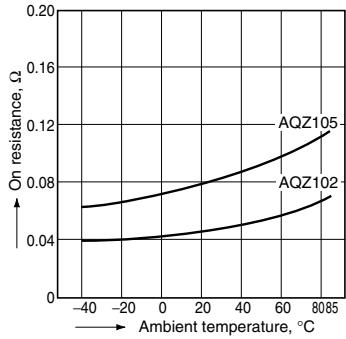


3.-(2) On resistance vs. ambient temperature characteristics (DC type)  
LED current: 10 mA;  
Continuous load current: 0.52 A (DC) (AQZ107),  
0.28 A (DC) (AQZ104)

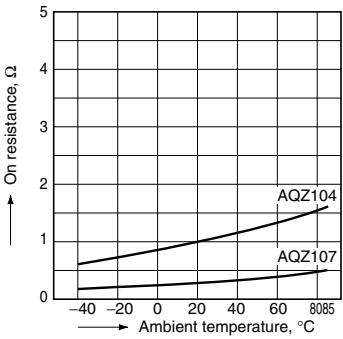


3.-(3) On resistance vs. ambient temperature characteristics (AC/DC type)  
LED current: 10 mA;  
Continuous load current: 1.2 A (DC) (AQZ202),  
0.8 A (DC) (AQZ205)

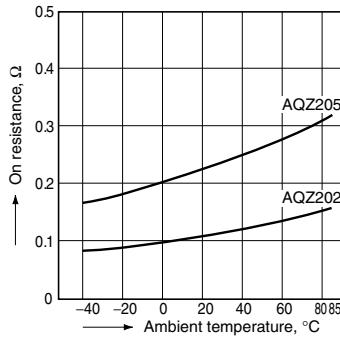


3.-(4) On resistance vs. ambient temperature characteristics (AC/DC type)  
LED current: 10 mA;  
Continuous load current: 0.4 A (DC) (AQZ207),  
0.2 A (DC) (AQZ204)

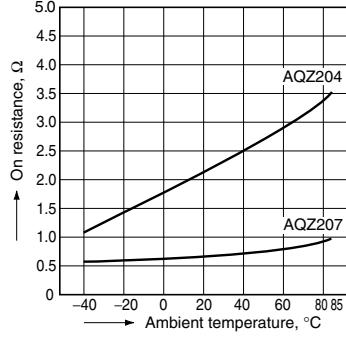


4.-(1) Turn on time vs. ambient temperature characteristics (DC type)  
LED current: 10 mA;  
Load voltage: 10 V (DC);  
Continuous load current: 100 mA (DC)

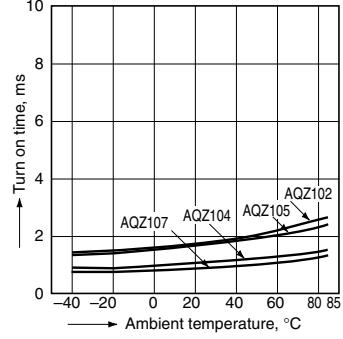


4.-(2) Turn on time vs. ambient temperature characteristics (AC/DC type)  
LED current: 10 mA;  
Load voltage: 10 V (DC);  
Continuous load current: 100 mA (DC)

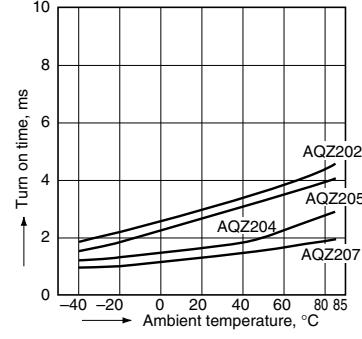


5.-(1) Turn off time vs. ambient temperature characteristics (DC type)  
LED current: 10 mA;  
Load voltage: 10 V (DC);  
Continuous load current: 100 mA (DC)

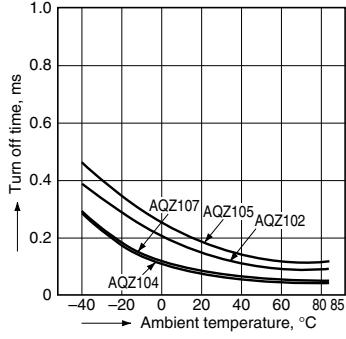

5.-(2) Turn off time vs. ambient temperature characteristics (AC/DC type)  
LED current: 10 mA;  
Load voltage: 10 V (DC);  
Continuous load current: 100 mA (DC)

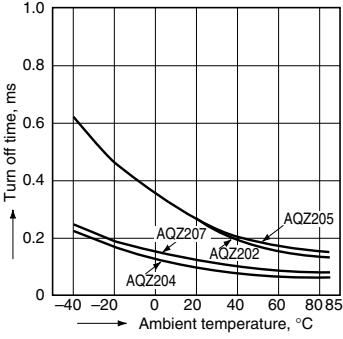


6.-(1) LED operate vs. ambient temperature characteristics (DC type)  
Load voltage: 10 V (DC);  
Continuous load current: 100 mA (DC)

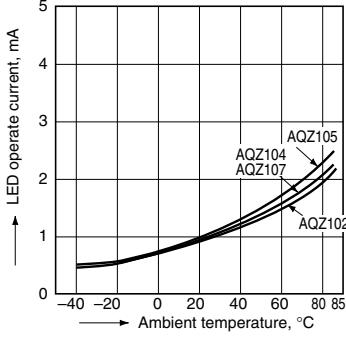


6.-(2) LED operate vs. ambient temperature characteristics (AC/DC type)

Load voltage: 10 V (DC);  
Continuous load current: 100 mA (DC)

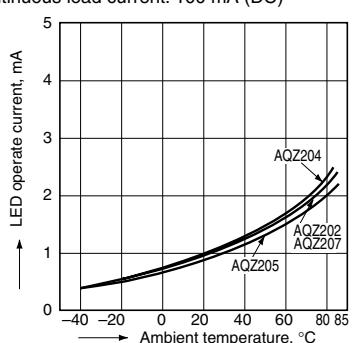


7.-(1) LED turn off current vs. ambient temperature characteristics (DC type)

Load voltage: 10 V (DC);  
Continuous load current: 100 mA (DC)

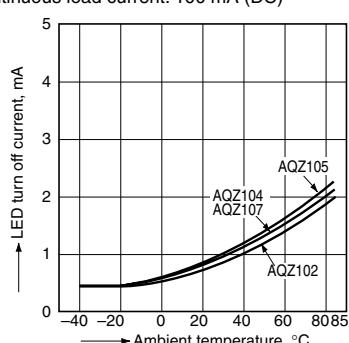


7.-(2) LED turn off current vs. ambient temperature characteristics (AC/DC type)

Load voltage: 10 V (DC);  
Continuous load current: 100 mA (DC)

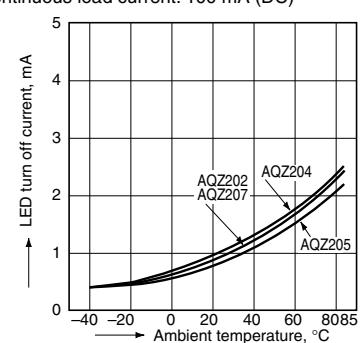


8. LED dropout voltage vs. ambient temperature characteristics

Sample: all types; LED current: 5 to 50 mA

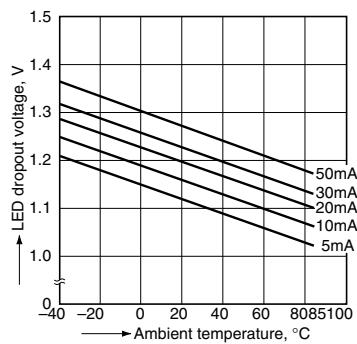


9.-(1) Current vs. voltage characteristics of output at MOS portion (DC type)

Ambient temperature: 25°C 77°F

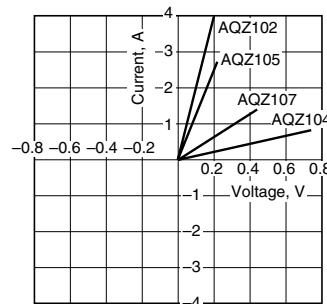


9.-(2) Current vs. voltage characteristics of output at MOS portion (AC/DC type)

Ambient temperature: 25°C 77°F

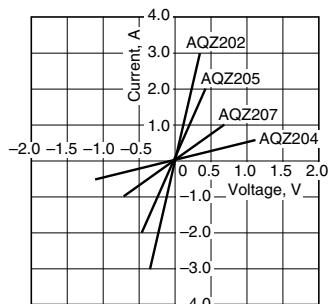


10.-(1) Off state leakage current vs. load voltage characteristics

Ambient temperature: 25°C 77°F

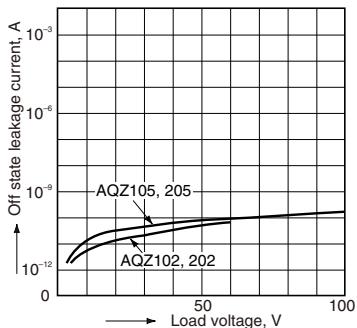

10.-(2) Off state leakage current vs. load voltage characteristics

Ambient temperature: 25°C 77°F

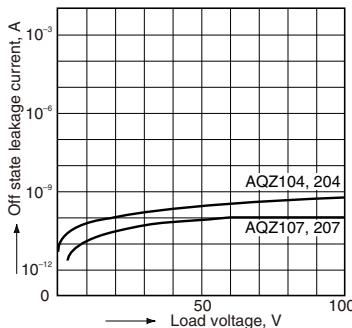


11.-(1) Turn on time vs. LED forward current characteristics (DC type)

Load voltage: 10 V (DC);

Continuous load current: 100 mA (DC);

Ambient temperature: 25°C 77°F

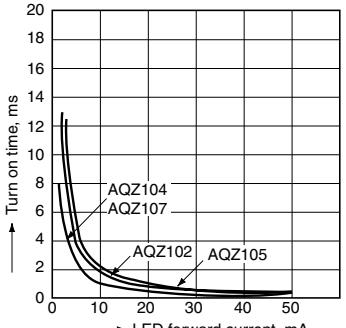


11.-(2) Turn on time vs. LED forward current characteristics (AC/DC type)

Load voltage: 10 V (DC);

Continuous load current: 100 mA (DC);

Ambient temperature: 25°C 77°F

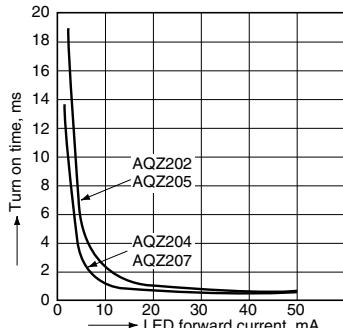


12.-(1) Turn off time vs. LED forward current characteristics (DC type)

Measured portion: between terminals 4 and 6;

Load voltage: 10 V (DC);

Continuous load current: 100 mA (DC);

Ambient temperature: 25°C 77°F

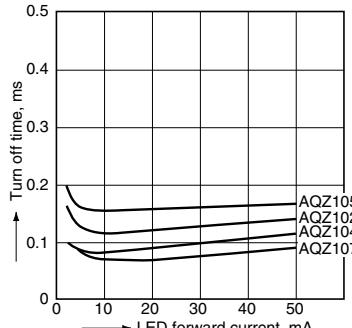


12.-(2) Turn off time vs. LED forward current characteristics (AC/DC type)

Load voltage: 10 V (DC);


Continuous load current: 100 mA (DC);

Ambient temperature: 25°C 77°F

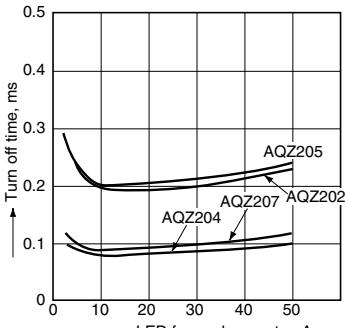


# Power 1 Form A (AQZ10○, 20○)


13.-(1) Turn on time vs. load voltage characteristics (DC type)  
 LED current: 10 mA;  
 Continuous load current: 100 mA;  
 Ambient temperature: 25°C 77°F

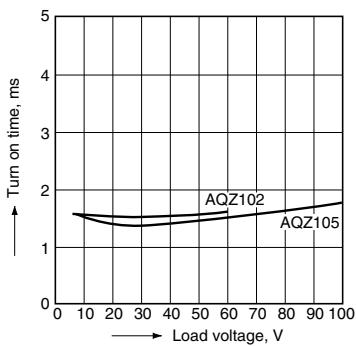


13.-(4) Turn on time vs. load voltage characteristics (AC/DC type)  
 LED current: 10 mA;  
 Continuous load current: 100 mA;  
 Ambient temperature: 25°C 77°F

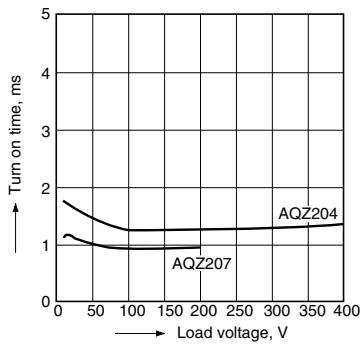


14.-(3) Turn on time vs. load current characteristics (AC/DC type)  
 LED current: 10 mA;  
 Load voltage: 10 V (DC);  
 Ambient temperature: 25°C 77°F

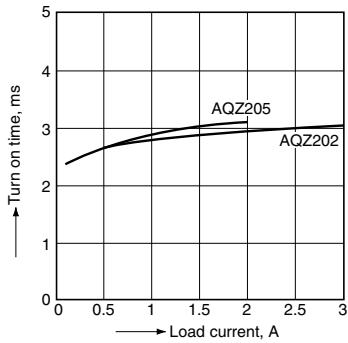


15.- (2) Turn off time vs. load voltage characteristics (DC type)  
 LED current: 10 mA;  
 Continuous load current: 100 mA;  
 Ambient temperature: 25°C 77°F

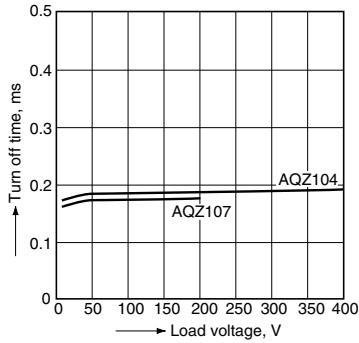


13.- (2) Turn on time vs. load voltage characteristics (DC type)  
 LED current: 10 mA;  
 Continuous load current: 100 mA;  
 Ambient temperature: 25°C 77°F

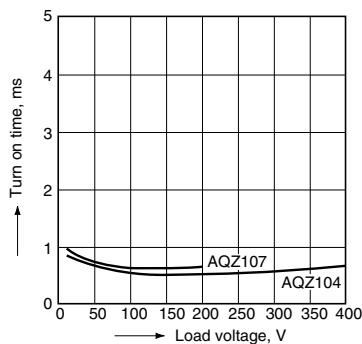


14.- (2) Turn on time vs. load current characteristics (DC type)  
 LED current: 10 mA;  
 Load voltage: 10 V (DC);  
 Ambient temperature: 25°C 77°F

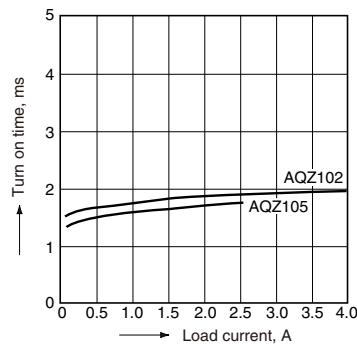


15.- (1) Turn off time vs. load voltage characteristics (DC type)  
 LED current: 10 mA;  
 Continuous load current: 100 mA;  
 Ambient temperature: 25°C 77°F

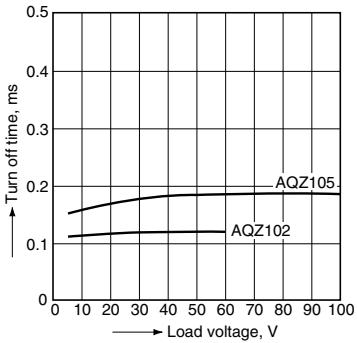


15.- (3) Turn off time vs. load voltage characteristics (AC/DC type)  
 LED current: 10 mA;  
 Continuous load current: 100 mA;  
 Ambient temperature: 25°C 77°F

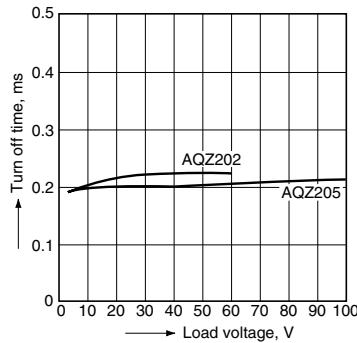


15.- (4) Turn off time vs. load voltage characteristics (AC/DC type)  
 LED current: 10 mA;  
 Continuous load current: 100 mA;  
 Ambient temperature: 25°C 77°F

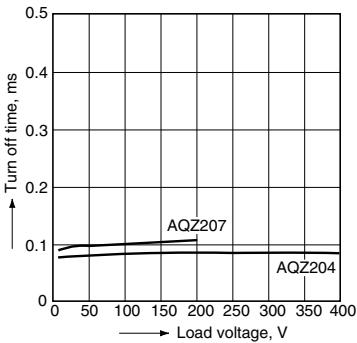


16.-1) Turn off time vs. load current characteristics (DC type)  
 LED current: 10 mA;  
 Load voltage: 10 V (DC);  
 Ambient temperature: 25°C 77°F

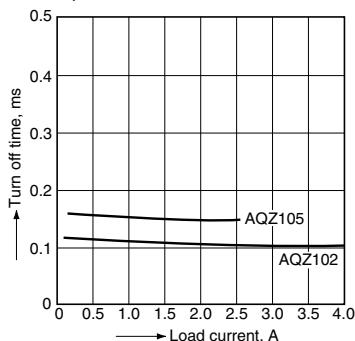


16.-2) Turn off time vs. load current characteristics (DC type)  
 LED current: 10 mA;  
 Load voltage: 10 V (DC);  
 Ambient temperature: 25°C 77°F

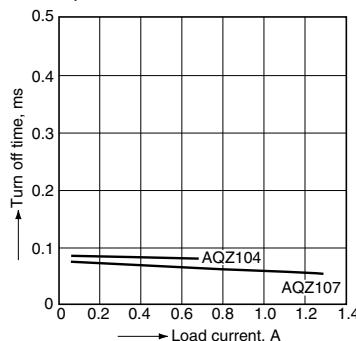


16.-3) Turn off time vs. load current characteristics (AC/DC type)  
 LED current: 10 mA;  
 Load voltage: 10 V (DC);  
 Ambient temperature: 25°C 77°F

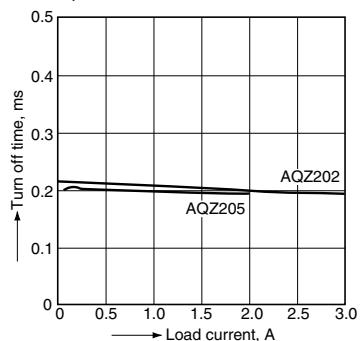


16.-4) Turn off time vs. load current characteristics (AC/DC type)  
 LED current: 10 mA;  
 Load voltage: 10 V (DC);  
 Ambient temperature: 25°C 77°F

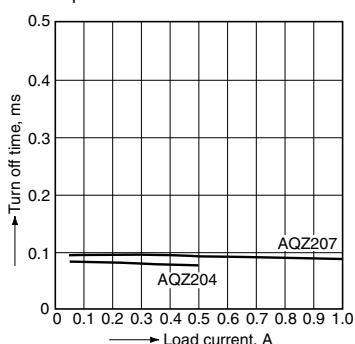


17. Maximum operating frequency vs. load voltage/current characteristics  
 Sample: All types;  
 LED current: 10 mA;  
 Ambient temperature: 25°C 77°F

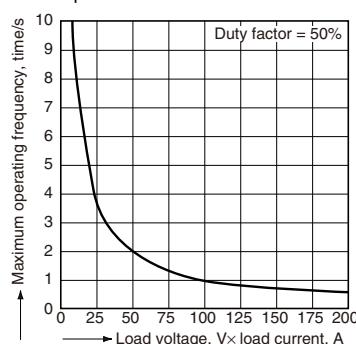

18.-1) Output capacitance vs. applied voltage characteristics (DC type)  
 Frequency: 1 MHz;  
 Ambient temperature: 25°C 77°F

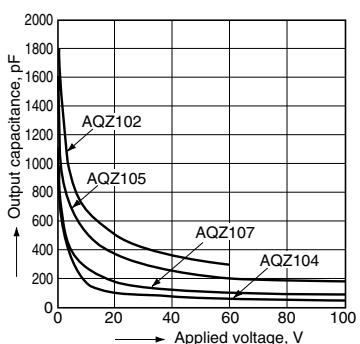


18.-2) Output capacitance vs. applied voltage characteristics (AC/DC type)  
 Frequency: 1 MHz;  
 Ambient temperature: 25°C 77°F

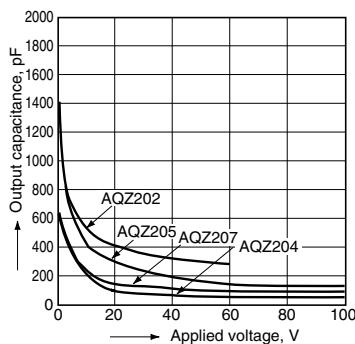


## ACCESSORY (mm inch)

### Socket

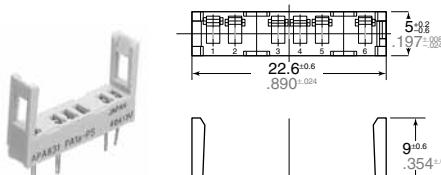


PA1a-PS

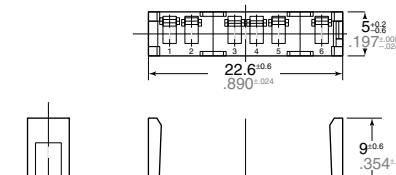


PA1a-PS-H

PC board pattern (BOTTOM VIEW)  
 Standard type

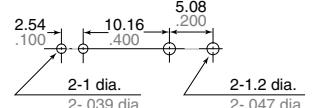

Self clinching type

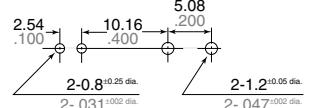

Tolerance: ±0.1 ±.004