

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



# Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China







### ASSR-1410, ASSR-1411 and ASSR-1420

General Purpose, Form A, Solid State Relay (Photo MOSFET)  $(60V/0.6A/1\Omega)$ 



### **Data Sheet**




#### **Description**

The ASSR-14XX Series consists of an AlGaAs infrared light-emitting diode (LED) input stage optically coupled to a high-voltage output detector circuit. The detector consists of a high-speed photovoltaic diode array and driver circuitry to switch on/off two discrete high voltage MOSFETs. The relay turns on (contact closes) with a minimum input current of 3mA through the input LED. The relay turns off (contact opens) with an input voltage of 0.8V or less.

The single channel configurations, ASSR-1410 and ASSR-1411, are equivalent to 1 Form A Electromechanical Relays (EMR), and the dual channel configuration, ASSR-1420, is equivalent to 2 Form A EMR. They are available in 4-pin SO, 6-pin DIP, 8-pin DIP and Gull Wing Surface Mount for DIP packages. Their electrical and switching characteristics are specified over the temperature range of -40°C to +85°C. They are used for general purpose switching of signals and low power AC/DC loads.

ASSR-1411 enables AC/DC and DC-only output connections. For DC-only connection, the output current, lo, increases to 1.2A and the on-resistance,  $R_{(ON)}$  reduces to  $0.5\Omega$ .

#### **Functional Diagram**



#### **Features**

- Compact Solid-State Bi-directional Signal Switch
- Single and Dual Channel Normally-off Single-Pole-Single-Throw (SPST) Relay
- 60V Output Withstand Voltage
- 0.6A or 1.2A Current Rating (See Schematic for ASSR-1411 Connection A and B)
- Low Input Current: CMOS Compatibility
- Low On-Resistance: 0.2  $\Omega$  Typical for DC-only, 0.7  $\Omega$  Typical for AC/DC
- Very High Output Off-state Impedance: 10 Teraohms Typical
- High Speed Switching:
   0.1ms (Ton), 0.02ms (Toff) Typical
- High Transient Immunity: >1kV/μs
- High Input-to-Output Insulation Voltage (Safety and Regulatory Approvals)
  - 3750 Vrms for 1 min per UL1577
  - CSA Component Acceptance

#### **Applications**

- Telecommunication Switching
- Data Communications
- Industrial Controls
- Medical
- Security
- EMR / Reed Relay Replacement

CAUTION: It is advised that normal static precautions be taken in handling and assembly of this component to prevent damage and/or degradation which may be induced by ESD.

#### **Ordering Information**

ASSR-xxxx is UL Recognized with 3750 Vrms for 1 minute per UL1577 and is approved under CSA Component Acceptance Notice #5.

	Option		Surface	Gull	Tape		
Part number	RoHS Compliant	Package	Mount	Wing	& Reel	Quantity	
ASSR-1410	-003E	50.4	Х			100 units per tube	
	-503E	SO-4 =	Х		Х	1500 units per reel	
ASSR-1411	-001E					50 units per tube	
	-301E	300mil DIP-6	Χ	Χ		50 units per tube	
	-501E	_	Х	Χ	Х	1000 units per reel	
	-002E					50 units per tube	
ASSR-1420	-302E	300 mil DIP-8	Х	Χ		50 units per tube	
	-502E	_	Х	Χ	Х	1000 units per reel	

To order, choose a part number from the part number column and combine with the desired option from the option column to form an order entry.

#### Example 1:

ASSR-1411-501E to order product of 300mil DIP-6 Gull Wing Surface Mount package in Tape and Reel packaging and RoHS Compliant.


#### Example 2:

ASSR-1420-002E to order product of 300mil DIP-8 package in tube packaging and RoHS Compliant.


Option datasheets are available. Contact your Avago sales representative or authorized distributor for information.

### **Schematic**


#### ASSR-1410

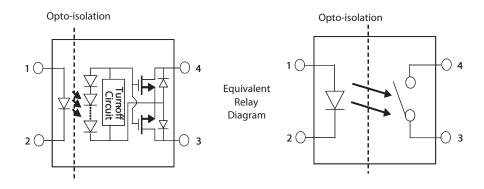


### **ASSR-1411 Connection A**

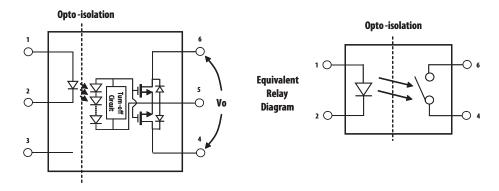

### **ASSR-1411 Connection B**

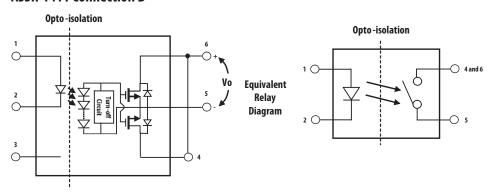


### ASSR-1420

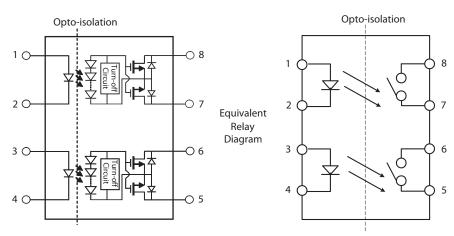


### **Package Outline Drawings**

### ASSR-1410 4-Pin Small Outline Package

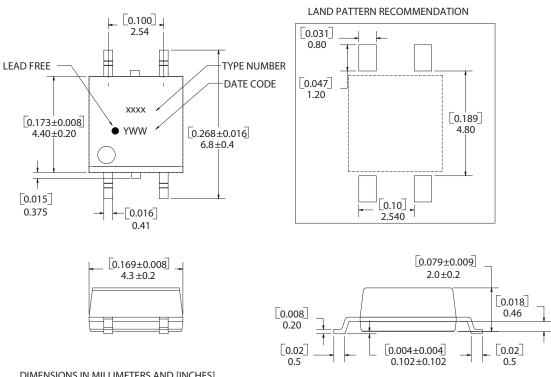


DIMENSIONS IN MILLIMETERS AND [INCHES]
OPTION NUMBER 500 AND UL RECOGNITION NOT MARKED

#### ASSR-1411 6-Pin DIP Package

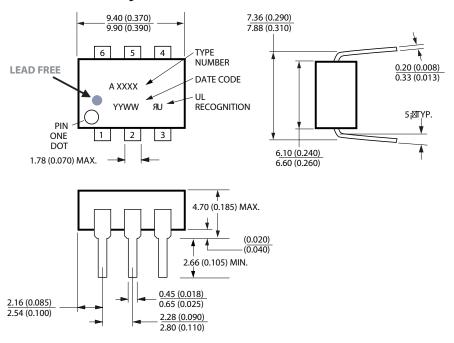


DIMENSIONS IN MILLIMETERS AND (INCHES).

#### ASSR-1411 6-Pin DIP Package with Gull Wing Surface Mount Option 300

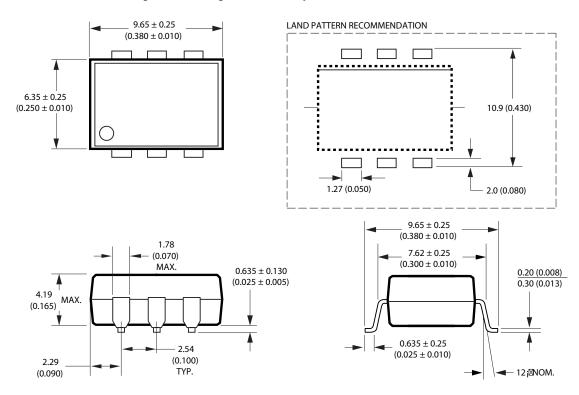


NOTE: FLOATING LEAD PROTRUSION IS 0.25 mm (10 mils) MAX.

#### ASSR-1420 8-Pin DIP Package

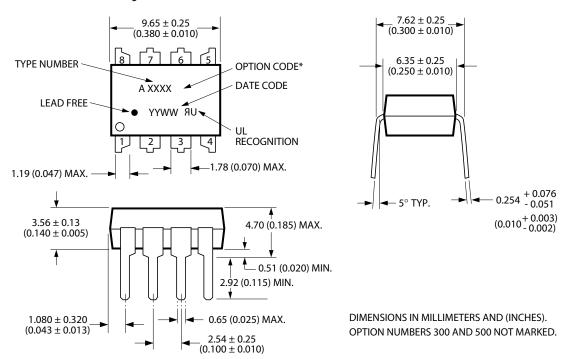


#### ASSR-1420 8-Pin DIP Package with Gull Wing Surface Mount Option 300

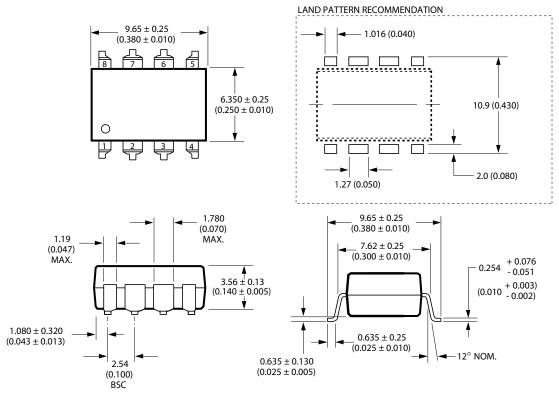

DIMENSIONS IN MILLIMETERS (INCHES). LEAD COPLANARITY = 0.10 mm (0.004 INCHES).

NOTE: FLOATING LEAD PROTRUSION IS 0.25 mm (10 mils) MAX.

#### **Lead Free IR Profile**

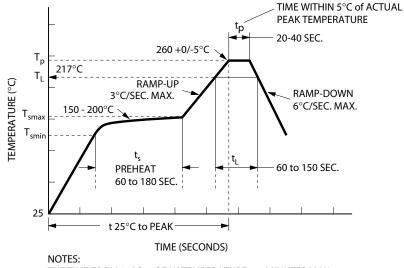

NOTES: THE TIME FROM 25°C to PEAK TEMPERATURE = 8 MINUTES MAX.  $T_{smax} = 200$ °C,  $T_{smin} = 150$ °C

Non-halide flux should be used.

### **Regulatory Information**

The ASSR-1410, ASSR-1411 and ASSR-1420 are approved by the following organizations:

### UL

Approved under UL 1577, component recognition program up to  $V_{\text{ISO}}$  = 3750  $V_{\text{RMS}}$ 

#### **CSA**

Approved under CSA Component Acceptance Notice #5.

### **Insulation and Safety Related Specifications**

Parameter	Symbol	ASSR-1410	ASSR-1411 ASSR-1420	Units	Conditions
Minimum External Air Gap (Clearance)	L(101)	4.9	7.1	mm	Measured from input terminals to output terminals, shortest distance through air.
Minimum External Tracking (Creepage)	L(102)	4.9	7.4	mm	Measured from input terminals to output terminals, shortest distance path along body.
Minimum Internal Plastic Gap (Internal Clearance)		0.08	0.08	mm	Through insulation distance conductor to conductor, usually the straight line distance thickness between the emitter and detector.
Tracking Resistance (Comparative Tracking Index)	CTI	175	175	V	DIN IEC 112/VDE 0303 Part 1
Isolation Group (DIN VDE0109)		Illa	IIIa		Material Group (DIN VDE 0109)

# **Absolute Maximum Ratings**

Parameter		Symbol	Min.	Max.	Units	Note
Storage Temperature		T <sub>S</sub>	-55	125	°C	
Operating Temperature		T <sub>A</sub>	-40	85	°C	
Junction Temperature		Tj		125	°C	
Lead Soldering Cycle	Temperature			260	°C	
	Time			10	S	
Input Current	Average	I <sub>F</sub>		25	mA	
	Surge	_		50		
	Transient	_		1000		
Reversed Input Voltage		V <sub>R</sub>		5	V	
Input Power Dissipation	ASSR-1410	P <sub>IN</sub>		40	mW	
	ASSR-1411	P <sub>IN</sub>		40	mW	
	ASSR-1420	P <sub>IN</sub>		80	mW	
Output Power Dissipation	ASSR-1410	P <sub>O</sub>		360	mW	
	ASSR-1411	P <sub>O</sub>		720	mW	
	ASSR-1420	Po		720	mW	
Average Output Current $(T_A = 25^{\circ}C, T_C \le 100^{\circ}C)$		lo		0.6	А	1
	ASSR-1411 Connection B	lo		1.2	А	
Output Voltage (T <sub>A</sub> = 25°C)		V <sub>O</sub>	-60	60	V	2
	ASSR-1411 Connection B	V <sub>O</sub>	0	60	V	
Solder Reflow Temperature Pro	ofile	See Lead F	ree IR Profile			

# **Recommended Operating Conditions**

Parameter	Symbol	Min.	Max.	Units	Note
Input Current (ON)	I <sub>F(ON)</sub>	3	20	mA	3
Input Voltage (OFF)	V <sub>F(OFF)</sub>	0	0.8	V	
Operating Temperature	T <sub>A</sub>	-40	+85	°C	

### **Package Characteristics**

Unless otherwise specified,  $T_A = 25$ °C.

Parameter	Sym.	Min.	Тур.	Max.	Units	Conditions	Note
Input-Output Momentary Withstand Voltage	V <sub>ISO</sub>	3750			Vrms	RH ≤ 50%, t = 1 min	4, 5
Input-Output Resistance	R <sub>I-O</sub>		10 <sup>12</sup>		Ω	V <sub>I-O</sub> = 500 Vdc	
Input-Output Capacitance	ASSR-1410 C <sub>I-O</sub>		0.4		pF	f = 1 MHz; $V_{I-O} = 0 Vdc$	4
	ASSR-1411 C <sub>I-O</sub>		0.5		pF	f = 1 MHz; $V_{I-O} = 0 Vdc$	
	ASSR-1420 C <sub>I-O</sub>		0.8		pF	f = 1 MHz; $V_{I-O} = 0 Vdc$	

# **Electrical Specifications (DC)**

Over recommended operating  $T_A = -40^{\circ}\text{C}$  to  $85^{\circ}\text{C}$ ,  $I_F = 5\text{mA}$  to 10mA, unless otherwise specified.

Parameter	Sym.	Min.	Тур.	Max.	Units	Conditions	Fig.	Note
Output Withstand Voltage	Vo(OFF)	60	65		V	$V_F$ =0.8V, $I_O$ =250 $\mu$ A, $T_A$ =25°C		
		55			V	V <sub>F</sub> =0.8V, I <sub>O</sub> =250 μA	5	
Output Leakage Current	I <sub>O(OFF)</sub>		0.5	100	nA	$V_F = 0.8V, V_O = 60V,$ $T_A = 25$ °C		
				1	μΑ	V <sub>F</sub> =0.8V, V <sub>O</sub> =60V	6	
Output Offset Voltage	V <sub>(OS)</sub>		1		μV	I <sub>F</sub> =5mA, I <sub>O</sub> =0mA		
Input Reverse Breakdown Voltage	V <sub>R</sub>	5			V	I <sub>R</sub> =10 μA		
Input Forward Voltage	V <sub>F</sub>	1.1	1.3	1.65	V	I <sub>F</sub> =5mA	7, 8	
Output On-resistance	R <sub>(ON)</sub>		0.7	1	Ω	$I_F$ =5mA, $I_O$ =600mA, Pulse ≤30ms, $T_A$ =25°C	9, 10	6
	ASSR-1411 Connection B R <sub>(ON)</sub>		0.2	0.5	Ω	I <sub>F</sub> =5mA, I <sub>O</sub> =1.2A, Pulse ≤30ms, T <sub>A</sub> =25°C		

#### **Switching Specifications (AC)**

Over recommended operating  $T_A = -40^{\circ}\text{C}$  to 85°C,  $I_F = 5\text{mA}$  to 10mA, unless otherwise specified.

Parameter	Sym.	Min.	Тур.	Max.	Units	Conditions	Fig.	Note
Turn On Time	T <sub>ON</sub>		0.25	0.5	ms	I <sub>F</sub> =5mA, I <sub>O</sub> =600mA, T <sub>A</sub> =25°C	11, 15	
				1.0	ms	I <sub>F</sub> =5mA, I <sub>O</sub> =600mA	12	
			0.1	0.25	ms	I <sub>F</sub> =10mA, I <sub>O</sub> =600mA, T <sub>A</sub> =25°C		
				0.5	ms	I <sub>F</sub> =10mA, I <sub>O</sub> =600mA		
Turn Off Time	T <sub>OFF</sub>		0.02	0.2	ms	I <sub>F</sub> =5mA, I <sub>O</sub> =600mA, T <sub>A</sub> =25°C	13, 15	
				0.5	ms	I <sub>F</sub> =5mA, I <sub>O</sub> =600mA	14	
			0.02	0.15	ms	I <sub>F</sub> =10mA, I <sub>O</sub> =600mA, T <sub>A</sub> =25°C		
				0.2	ms	I <sub>F</sub> =10mA, I <sub>O</sub> =600mA		
Output Transient Rejection	dV <sub>O</sub> /dt	1	7		kV/μs	$\Delta$ V <sub>O</sub> =60V, T <sub>A</sub> =25°C	16	
Input-Output Transient Rejection	dV <sub>I-O</sub> /dt	1	≥10		kV/μs	$\Delta V_{I-O}$ =1000V, $T_A$ =25°C	17	

#### Notes:

- 1. For derating, refer to Figure 1, 2, 3 and 4.
- 2. The voltage across the output terminals of the relay should not exceed this rated withstand voltage. Over-voltage protection circuits should be added in some applications to protect against over-voltage transients.
- 3. Threshold to switch device is  $I_F \ge 0.5$ mA, however, for qualified device performance over temperature range, it is recommended to operate at  $I_F = 5$ mA.
- 4. Device is considered as a two terminal device:
  - ASSR-1410 pin 1, 2 shorted and pin 3, 4 shorted.
  - ASSR-1411 pin 1, 2, 3 shorted and pin 4, 5, 6 shorted.
  - ASSR-1420 pin 1, 2, 3, 4 shorted and pin 5, 6, 7, 8 shorted.
- 5. The Input-Output Momentary Withstand Voltage is a dielectric voltage rating that should not be interpreted as an input-output continuous voltage rating. For the continuous voltage rating refer to the IEC/EN/DIN EN 60747-5-2 Insulation Characteristics Table (if applicable), your equipment level safety specification, or Avago Technologies Application Note 1074, "Optocoupler Input-Output Endurance Voltage."
- 6. During the pulsed  $R_{(ON)}$  measurement ( $I_O$  duration  $\leq$ 30ms), ambient ( $T_A$ ) and case temperature ( $T_C$ ) are equal.

#### **Applications Information**

#### **On-Resistance and Derating Curves**

The Output On-Resistance, R<sub>(ON)</sub>, specified in this data sheet, is the resistance measured across the output contact when a pulsed current signal (Io=0.6A) is applied to the output pins. The use of a pulsed signal (≤ 30ms) implies that each junction temperature is equal to the ambient and case temperatures. The steady-state resistance, Rss, on the other hand, is the value of the resistance measured across the output contact when a DC current signal is applied to the output pins for a duration sufficient to reach thermal equilibrium. Rss includes the effects of the temperature rise in the device.

Derating curves are shown in Figures 1, 2, 3 and 4, specifying the maximum output current allowable for a given ambient temperature. The maximum allowable output current and power dissipation are related by the expression Rss=Po(max)/(Io(max))<sup>2</sup> from which Rss can be calculated. Staying within the safe area assures that the steady state MOSFET junction temperature remains less than 125°C.

#### **Turn On Time and Turn Off Time Variation**

The ASSR-14XX Series exhibits a very fast turn on and turn off time. Both the turn on and turn off time can be adjusted by choosing proper forward current as depicted in Figures 11 and 13. The changes of the turn on and turn off time with ambient temperature are also shown in Figures 12 and 14.




Figure 1. Maximum Output Current Rating vs Ambient Temperature (ASSR-1410-003E)




Figure 2. Maximum Output Current Rating vs Ambient Temperature (ASSR-1411-001E)




Figure 3. Maximum Output Current Rating vs Ambient Temperature (ASSR-1411-001E DC Connection)




Figure 4. Maximum Output Current Rating vs Ambient Temperature (ASSR-1420-002E)




Figure 5. Normalized Typical Output Withstand Voltage vs. Temperature





Figure 6. Typical Output Leakage Current vs. Temperature



10






Figure 7. Typical Forward Voltage vs. Temperature

Figure 8. Typical Forward Current vs. Forward Voltage

Figure 9. Typical On Resistance vs. Temperature









Figure 10. Typical Output Current vs. Output Voltage

Figure 11. Typical Turn On Time vs. Input Current

Figure 12. Typical Turn On Time vs. Temperature






Figure 13. Typical Turn Off Time vs. Input Current

Figure 14. Typical Turn Off Time vs. Temperature



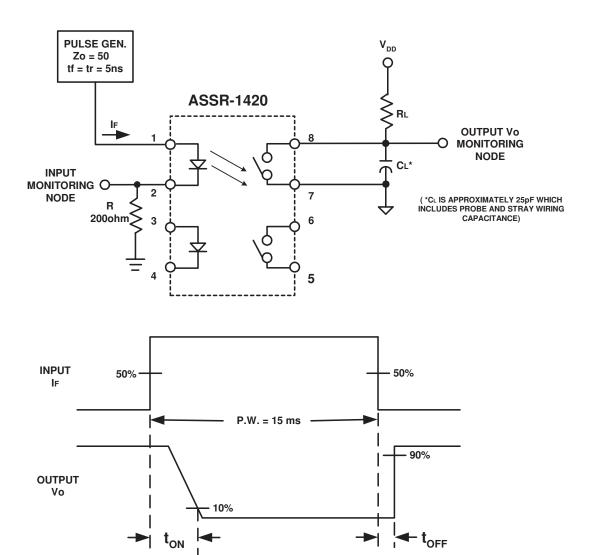


Figure 15. Switching Test circuit for  $t_{0N}$  ,  $t_{0\text{FF}}$ 

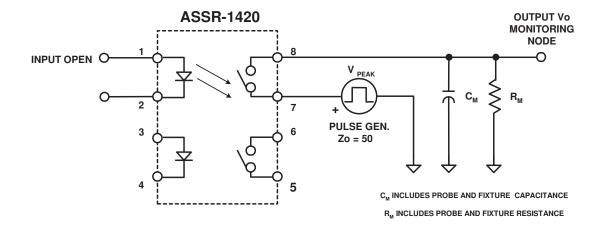

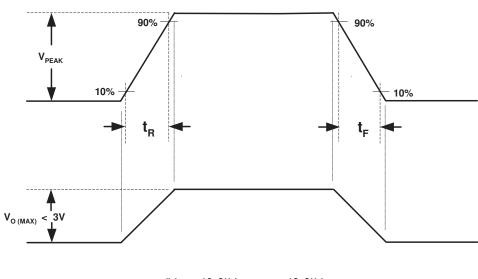

$$\begin{aligned} \frac{\text{dV}_0}{\text{dt}} &= \frac{(0.8)\text{V}_{\text{PEAK}}}{t_{\text{R}}} \text{ OR } \frac{(0.8)\text{V}_{\text{PEAK}}}{t_{\text{F}}} \\ \text{OVER SHOOT ON V}_{\text{PEAK}} \text{ IS TO BE 10\%} \end{aligned}$$

Figure 16. Output Transient Rejection Test Circuit

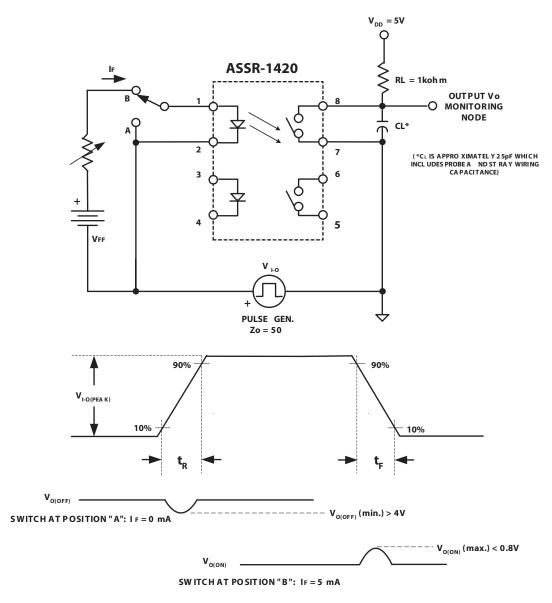


Figure 17. Input - Output Transient Rejection Test Circuit