



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




TRIAD

AX97 Series

SMD POWER INDUCTORS

OUTLINE DIMENSIONS/RECOMMENDED PCB LAYOUT(inch/mm)

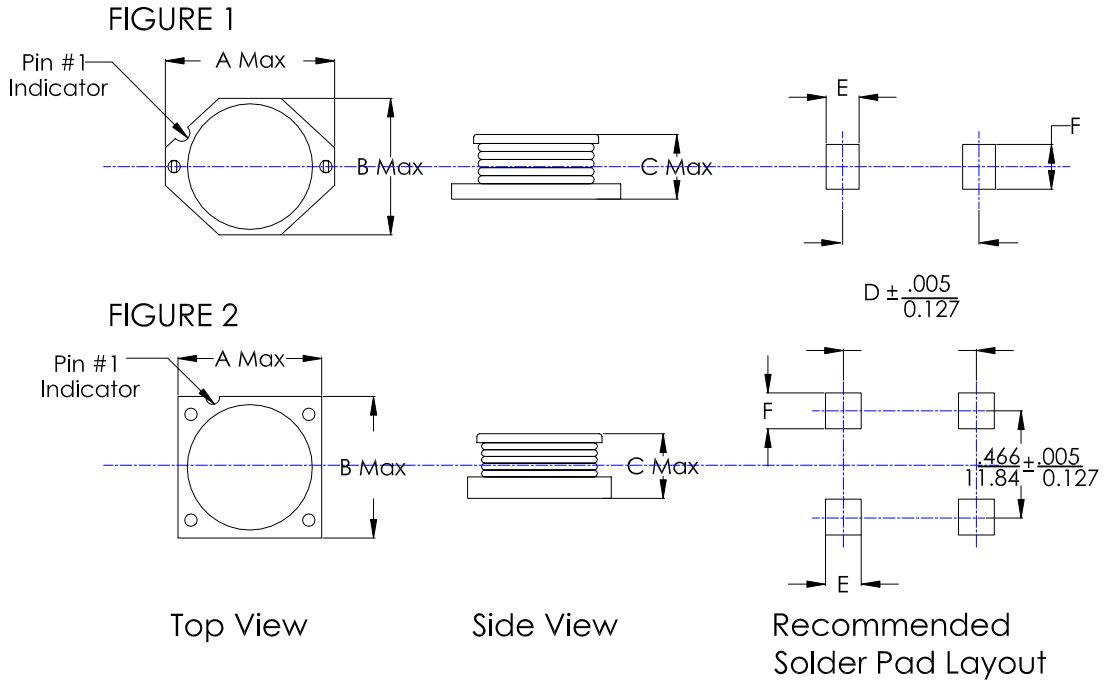

Part No.	A	B	C	D	E	F	Figure
AX97-10	$\frac{0.295}{7.30}$	$\frac{0.188}{4.78}$	$\frac{0.127}{3.23}$	$\frac{0.218}{5.54}$	$\frac{0.059}{1.50}$	$\frac{0.100}{2.54}$	1
AX97-20	$\frac{0.530}{13.46}$	$\frac{0.370}{9.40}$	$\frac{0.137}{3.50}$	$\frac{0.404}{10.26}$	$\frac{0.120}{3.05}$	$\frac{0.135}{3.43}$	1
AX97-30	$\frac{0.530}{13.46}$	$\frac{0.370}{9.40}$	$\frac{0.232}{5.90}$	$\frac{0.404}{10.26}$	$\frac{0.120}{3.05}$	$\frac{0.135}{3.43}$	1
AX97-40	$\frac{0.634}{16.10}$	$\frac{0.622}{15.80}$	$\frac{0.284}{7.21}$	$\frac{0.520}{13.21}$	$\frac{0.157}{4.00}$	$\frac{0.157}{4.00}$	2
AX97-50	$\frac{0.746}{18.95}$	$\frac{0.600}{15.24}$	$\frac{0.284}{7.21}$	$\frac{0.595}{15.11}$	$\frac{0.145}{3.68}$	$\frac{0.135}{3.43}$	1



10XXX



20XXX



30XXX



40XXX



50XXX

Design and specification are subject to change without notice.

Web: www.TriadMagnetics.com
Phone 951-277-0757
Fax 951-277-2757

460 Harley Knox Blvd.
Perris, California 92571

Publish Date: December 4, 2013

SPECIFICATIONS

Part Number	Inductance ($\mu\text{H} \pm 20\%$) (Note 1)	DC Resistance @25°C (Ω_{max}) (Note 3)	Rated Current (Amp) (Note 2)	Figure	Part Number	Inductance ($\mu\text{H} \pm 20\%$) (Note 1)	DC Resistance @25°C (Ω_{max}) (Note 3)	Rated Current (Amp) (Note 2)	Figure
AX97-101R0	1.0	0.03	2.90	1	AX97-30101	100	0.30	1.50	1
AX97-101R5	1.5	0.05	2.80	1	AX97-30151	150	0.44	1.20	1
AX97-102R2	2.2	0.06	2.40	1	AX97-30221	220	0.64	1.00	1
AX97103R3	3.3	0.09	2.00	1	AX97-30331	330	1.00	0.80	1
AX97104R7	4.7	0.12	1.50	1	AX97-30471	470	1.50	0.50	1
AX97-106R8	6.8	0.17	1.30	1	AX97-30681	680	2.20	0.40	1
AX97-10100	10	0.22	1.00	1	AX97-30102	1000	3.15	0.30	1
AX97-10150	15	0.30	0.80	1	AX97-403R3	3.3	0.01	9.80	2
AX97-10220	22	0.43	0.70	1	AX97-404R7	4.7	0.01	9.30	2
AX97-10330	33	0.69	0.57	1	AX97-406R8	6.8	0.02	7.70	2
AX97-10470	47	0.92	0.46	1	AX97-408R2	8.2	0.02	7.00	2
AX97-10680	68	1.39	0.37	1	AX97-40100	10	0.02	6.50	2
AX97-10101	100	1.98	0.28	1	AX97-40150	15	0.03	5.30	2
AX97-10151	150	3.08	0.22	1	AX97-40220	22	0.04	4.40	2
1X97-10221	220	4.47	0.18	1	AX97-40330	33	0.06	3.50	2
AX97-10331	330	6.90	0.15	1	AX97-40470	47	0.07	3.00	2
AX97-10471	470	11.55	0.12	1	AX97-40680	68	0.11	2.50	2
AX97-20100	10	0.070	2.00	1	AX97-40820	82	0.12	2.20	2
AX97-20150	15	0.090	1.50	1	AX97-40101	100	0.15	2.00	2
AX97-20220	22	0.150	1.30	1	AX97-40151	150	0.22	1.70	2
AX97-20330	33	0.210	1.10	1	AX97-40221	220	0.33	1.30	2
AX97-20470	47	0.310	0.80	1	AX97-40331	330	0.45	1.10	2
AX97-20680	68	0.420	0.70	1	AX97-40471	470	0.70	0.93	2
AX97-20101	100	0.580	0.60	1	AX97-40681	680	1.00	0.78	2
AX97-20151	150	0.890	0.50	1	AX97-40102	1000	1.45	0.65	2
AX97-20221	220	1.300	0.40	1	AX97-50R78	0.78	0.003	16.00	1
AX97-20331	330	2.000	0.30	1	AX97-501R3	1.3	0.0043	14.00	1
AX98-20471	470	2.500	0.20	1	AX97-502R0	2.0	0.005	12.00	1
AX97-20681	680	3.500	0.10	1	AX97-502R6	2.6	0.006	10.00	1
AX97-20102	1000	6.000	0.05	1	AX97-503R3	3.3	0.008	9.80	1
AX97-301R0	1.0	0.01	8.50	1	AX97-505R6	5.6	0.010	7.50	1
AX97-301R5	1.5	0.01	7.90	1	AX97-50100	10	0.023	6.00	1
AX97-302R2	2.2	0.02	7.40	1	AX97-50150	15	0.035	4.50	1
AX97-303R3	3.3	0.02	6.60	1	AX97-50220	22	0.045	4.00	1
AX97-304R7	4.7	0.02	6.00	1	AX97-50330	33	0.075	3.00	1
AX98-306R8	6.8	0.03	5.20	1	AX97-50470	47	0.096	2.60	1
AX97-308R2	8.2	0.03	5.00	1	AX97-50680	68	0.140	2.30	1
AX97-30100	10.0	0.04	4.60	1	AX97-50101	100	0.190	1.70	1
AX97-30150	15.0	0.05	3.70	1	AX97-50151	150	0.290	1.50	1
AX97-30220	22.0	0.07	3.10	1	AX97-50221	220	0.410	1.20	1
AX97-30330	33.0	0.11	2.50	1	AX97-50331	330	0.540	1.00	1
AX97-30470	47.0	0.16	2.00	1	AX97-50471	470	0.800	0.83	1
AX97-30680	68.0	0.20	1.80	1	AX97-50681	680	1.150	0.72	1
AX97-30820	82.0	0.24	1.58	1	AX97-50102	1000	1.800	0.56	1

Note:1.Inductance measured at 100.0KHz,0.1Vrms,without DC current.

2.Rated DC current is the approximate current at which inductance will be decreased by 10% from its initial (zero DC) value or the DC current at which $\Delta T=40^{\circ}\text{C}$,whichever is lower.

3.For AX97-40 Serie, resistance measured with both windings conducted in parallel.

RoHS Compliance: As of manufacturing date February 2005, all standard products meet the requirements of 2011/65/EU, known as the RoHS initiative.

* Upon printing, this document is considered "uncontrolled". Please contact Triad Magnetics' website for the most current version

Web: www.TriadMagnetics.com
Phone 951-277-0757
Fax 951-277-2757

460 Harley Knox Blvd.
Perris, California 92571

Publish Date: December 4, 2013