

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China







BLF8G22LS-205V

Power LDMOS transistor

AMPLEON

Rev. 2 — 1 September 2015

Product data sheet

1. Product profile

1.1 General description

205 W LDMOS power transistor with improved video bandwidth for base station applications at frequencies from 2100 MHz to 2200 MHz.

Table 1. Typical performance

Typical RF performance at T_{case} = 25 °C in a common source class-AB production test circuit.

Test signal	f	I _{Dq}	V _{DS}	P _{L(AV)}	Gp	η_D	ACPR _{5M}
	(MHz)	(mA)	(V)	(W)	(dB)	(%)	(dBc)
1-carrier W-CDMA	2110 to 2170	1500	28	50	18.3	32.5	-32 [1]

^[1] Test signal: 3GPP test model 1; 64 DPCH; PAR = 7.2 dB at 0.01 % probability on CCDF.

1.2 Features and benefits

- Excellent ruggedness
- High efficiency
- Low thermal resistance providing excellent thermal stability
- Designed for broadband operation
- Lower output capacitance for improved performance in Doherty applications
- Designed for low memory effects providing excellent pre-distortability
- Internally matched for ease of use
- Integrated ESD protection
- Compliant to Directive 2002/95/EC, regarding Restriction of Hazardous Substances (RoHS)

1.3 Applications

 RF power amplifiers for base stations and multi carrier applications in the 2100 MHz to 2200 MHz frequency range

2. Pinning information

Table 2. Pinning

Pin	Description	Simplified outline	Graphic symbol
1	drain	, .	_
2	gate	4 7 5	67 - 1 4,5
3	source	[1]	6,7
4	decoupling lead		3
5	decoupling lead	2	aaa-003619
6	n.c.	6 7	
7	n.c.		

^[1] Connected to flange.

3. Ordering information

Table 3. Ordering information

Type number	Packag	je	
	Name	Description	Version
BLF8G22LS-205V	-	earless flanged LDMOST ceramic package; 6 leads	SOT1239B

4. Limiting values

Table 4. Limiting values

In accordance with the Absolute Maximum Rating System (IEC 60134).

Symbol	Parameter	Conditions	Min	Max	Unit
V_{DS}	drain-source voltage		-	65	V
V_{GS}	gate-source voltage		-0.5	+13	V
T _{stg}	storage temperature		-65	+150	°C
T _i	junction temperature	[1]	-	225	°C

^[1] Continuous use at maximum temperature will affect the reliability, for details refer to the on-line MTF calculator.

5. Thermal characteristics

Table 5. Thermal characteristics

Symbol	Parameter	Conditions	Тур	Unit
R _{th(j-c)}		T_{case} = 80 °C; P_{L} = 56 W; V_{DS} = 28 V; I_{Dq} = 1200 mA	0.26	K/W

6. Characteristics

Table 6. DC characteristics

 T_i = 25 °C, unless otherwise specified.

Symbol	Parameter	Conditions	Min	Тур	Max	Unit
$V_{(BR)DSS}$	drain-source breakdown voltage	$V_{GS} = 0 \text{ V}; I_D = 3.3 \text{ mA}$	65	-	-	V
$V_{GS(th)}$	gate-source threshold voltage	V _{DS} = 10 V; I _D = 330 mA	1.5	1.9	2.3	V
V_{GSq}	gate-source quiescent voltage	V _{DS} = 28 V; I _D = 1650 mA	1.7	2.1	2.5	V
I _{DSS}	drain leakage current	V _{GS} = 0 V; V _{DS} = 28 V	-	-	3.6	μΑ
I _{DSX}	drain cut-off current	$V_{GS} = V_{GS(th)} + 3.75 \text{ V};$ $V_{DS} = 10 \text{ V}$	-	60	-	Α
I _{GSS}	gate leakage current	V _{GS} = 11 V; V _{DS} = 0 V	-	-	360	nA
g _{fs}	forward transconductance	V _{DS} = 10 V; I _D = 330 mA	-	2.9	-	S
R _{DS(on)}	drain-source on-state resistance	$V_{GS} = V_{GS(th)} + 3.75 \text{ V};$ $I_D = 11.6 \text{ A}$	-	0.04	-	Ω

Table 7. RF characteristics

Test signal: 1-carrier W-CDMA; PAR = 7.2 dB at 0.01 % probability on CCDF; 3GPP test model 1; 64 DPCH; f_1 = 2110 MHz; f_2 = 2170 MHz; RF performance at V_{DS} = 28 V; I_{Dq} = 1200 mA; T_{case} = 25 °C; unless otherwise specified; in a production circuit.

Symbol	Parameter	Conditions	Min	Тур	Max	Unit
Gp	power gain	P _{L(AV)} = 50.1 W	17.1	18.3	-	dB
η_{D}	drain efficiency	P _{L(AV)} = 50.1 W	27.5	32.5	-	%
RLin	input return loss	P _{L(AV)} = 50.1 W	-	-10	-6	dB
ACPR	adjacent channel power ratio	P _{L(AV)} = 50.1 W	-	-30	-25	dBc

7. Test information

7.1 Ruggedness in Doherty operation

The BLF8G22LS-205V is capable of withstanding a load mismatch corresponding to VSWR = 10 : 1 through all phases under the following conditions: V_{DS} = 28 V; I_{Dg} = 1200 mA; P_L = 140 W (W-CDMA); f = 2110 MHz.


7.2 Impedance information

Table 8. Typical impedance

Measured load-pull data; I_{Dq} = 1800 mA; V_{DS} = 28 V; typical values unless otherwise specified.

f	Z _S [1]	Z _L [1]	P _L [2]	η _D [2]	G _p [2]
(MHz)	(Ω)	(Ω)	(W)	(%)	(dB)
Maximum power load					
2110	1.80 – j4.05	1.2 – j2.75	56.00	56.61	15.57
2140	2.24 - j5.00	1.2 – j2.75	55.95	55.85	15.71
2170	2.90 - j4.50	1.2 – j2.75	55.88	56.05	16.03
Maximum dra	in efficiency load				
2110	1.80 – j4.05	1.60 – j1.34	54.08	65.84	18.12
2140	2.24 – j5.00	1.52 – j1.57	54.38	64.88	18.06
2170	2.90 - j4.50	1.41 – j1.77	54.58	64.24	18.08

- [1] Z_S and Z_L defined in Figure 1.
- [2] at 3 dB gain compression

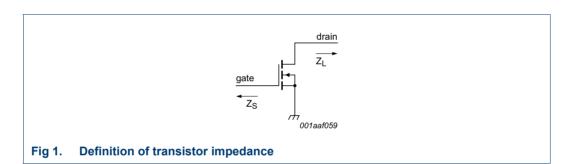

7.3 VBW in a class-AB operation

The BLF8G22LS-205V shows 110 MHz (typical) video bandwidth in class-AB test circuit in 2140 MHz at V_{DS} = 28 V; I_{Dq} = 1500 mA.

7.4 Test circuit


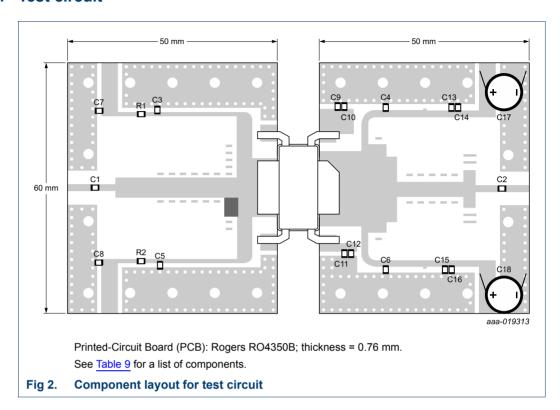


Table 9.List of componentsSee Figure 2 for component layout.


Component	Description	Value	Remarks
C1, C2, C3, C4, C5, C6	multilayer ceramic chip capacitor	20 pF	
C7, C8, C9, C10, C11, C12, C14, C16	multilayer ceramic chip capacitor	10 μF, 50 V	
C13, C15	multilayer ceramic chip capacitor	1 μF, 50 v	
C17, C18	electrolytic capacitor	2200 μF, 63 V	
R1, R2	chip resistor	5.1 Ω	

7.5 Graphical data


7.5.1 Pulsed CW

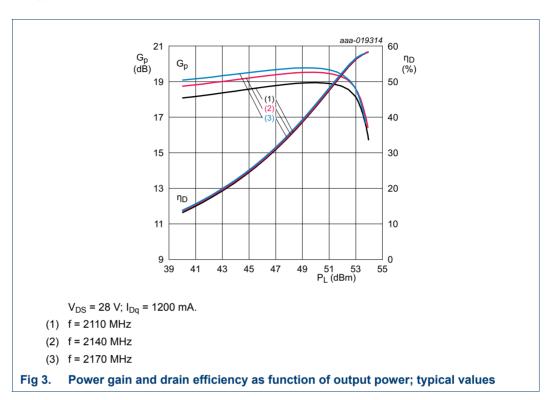

7.5.2 CW

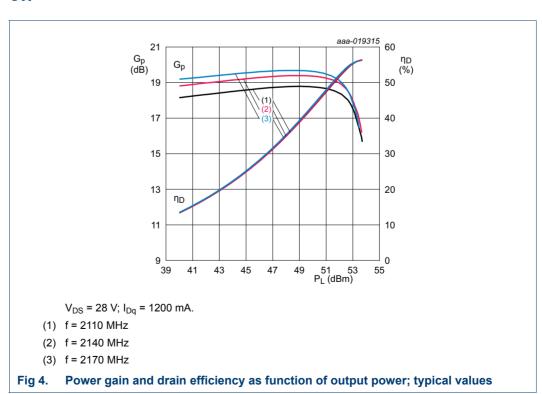


7.5.3 1-Carrier W-CDMA

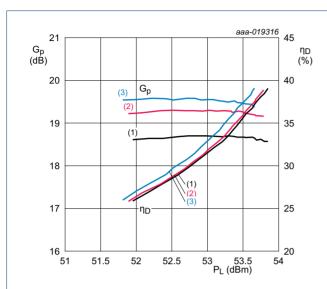

 V_{DS} = 28 V; I_{Dq} = 1200 mA.

- (1) f = 2110 MHz
- (2) f = 2140 MHz
- (3) f = 2170 MHz


Fig 5. Power gain and drain efficiency as function of output power; typical values

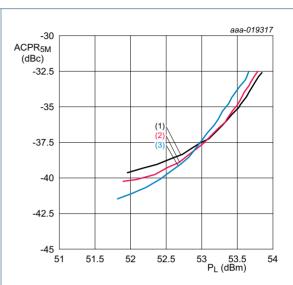

 $V_{DS} = 28 \text{ V}; I_{Dq} = 1200 \text{ mA}.$

- (1) f = 2110 MHz
- (2) f = 2140 MHz
- (3) f = 2170 MHz

Fig 6. Adjacent channel power ratio (5 MHz) as a function of output power; typical values

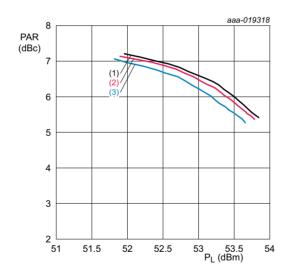


 V_{DS} = 28 V; I_{Dq} = 1200 mA.

- (1) f = 2110 MHz
- (2) f = 2140 MHz
- (3) f = 2170 MHz

Fig 7. Peak-to-average ratio as a function of output power; typical values

7.5.4 2-Tone VBW

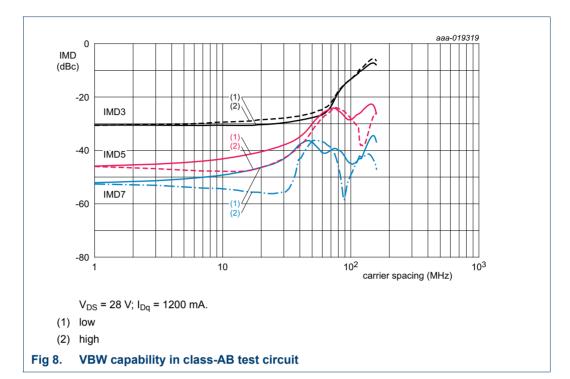

8 of 13

8. Package outline

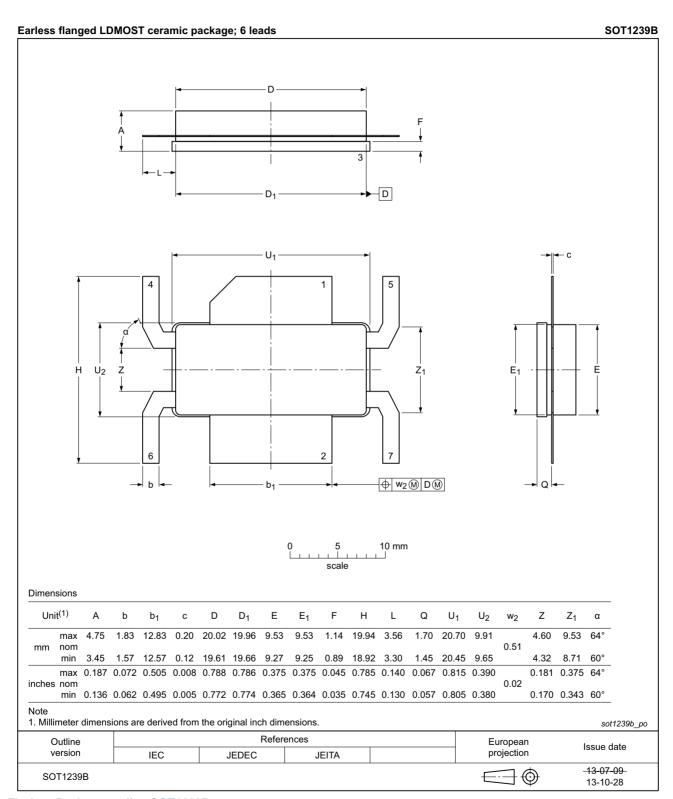


Fig 9. Package outline SOT1239B

9. Handling information

CAUTION



This device is sensitive to ElectroStatic Discharge (ESD). Observe precautions for handling electrostatic sensitive devices.

Such precautions are described in the ANSI/ESD S20.20, IEC/ST 61340-5, JESD625-A or equivalent standards.

10. Abbreviations

Table 10. Abbreviations

Acronym	Description	
3GPP	3rd Partnership Project	
CW	Continuous Wave	
CCDF	Complementary Cumulative Distribution Function	
DPCH	Dedicated Physical CHannel	
ESD	ElectroStatic Discharge	
LDMOS	Laterally Diffused Metal-Oxide Semiconductor	
LDMOST	Laterally Diffused Metal-Oxide Semiconductor Transistor	
MTF	Median Time to Failure	
PAR	Peak-to-Average Ratio	
VBW	Video BandWidth	
VSWR	Voltage Standing Wave Ratio	
W-CDMA	Wideband Code Division Multiple Access	

11. Revision history

Table 11. Revision history

Document ID	Release date	Data sheet status	Change notice	Supersedes
BLF8G22LS-205V v.2	20150901	Product data sheet	-	BLF8G22LS-205V v.1
Modifications:	The format of this document has been redesigned to comply with the new identity guidelines of Ampleon			
	Legal texts have been adapted to the new company name where appropriate			
BLF8G22LS-205V v.1	20150901	Product data sheet	-	-

12. Legal information

12.1 Data sheet status

Document status[1][2]	Product status[3]	Definition
Objective [short] data sheet	Development	This document contains data from the objective specification for product development.
Preliminary [short] data sheet	Qualification	This document contains data from the preliminary specification.
Product [short] data sheet	Production	This document contains the product specification.

- [1] Please consult the most recently issued document before initiating or completing a design.
- [2] The term 'short data sheet' is explained in section "Definitions"
- [3] The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the Internet at URL http://www.ampleon.com.

12.2 Definitions

Draft — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. Ampleon does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

Short data sheet — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local Ampleon sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

Product specification — The information and data provided in a Product data sheet shall define the specification of the product as agreed between Ampleon and its customer, unless Ampleon and customer have explicitly agreed otherwise in writing. In no event however, shall an agreement be valid in which the Ampleon product is deemed to offer functions and qualities beyond those described in the Product data sheet.

12.3 Disclaimers

Limited warranty and liability — Information in this document is believed to be accurate and reliable. However, Ampleon does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. Ampleon takes no responsibility for the content in this document if provided by an information source outside of Ampleon.

In no event shall Ampleon be liable for any indirect, incidental, punitive, special or consequential damages (including - without limitation - lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory.

Notwithstanding any damages that customer might incur for any reason whatsoever, Ampleon's aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the *Terms and conditions of commercial sale* of Ampleon.

Right to make changes — Ampleon reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

Suitability for use — Ampleon products are not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of an

Ampleon product can reasonably be expected to result in personal injury, death or severe property or environmental damage. Ampleon and its suppliers accept no liability for inclusion and/or use of Ampleon products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

Applications — Applications that are described herein for any of these products are for illustrative purposes only. Ampleon makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Customers are responsible for the design and operation of their applications and products using Ampleon products, and Ampleon accepts no liability for any assistance with applications or customer product design. It is customer's sole responsibility to determine whether the Ampleon product is suitable and fit for the customer's applications and products planned, as well as for the planned application and use of customer's third party customer(s). Customers should provide appropriate design and operating safeguards to minimize the risks associated with their applications and products.

Ampleon does not accept any liability related to any default, damage, costs or problem which is based on any weakness or default in the customer's applications or products, or the application or use by customer's third party customer(s). Customer is responsible for doing all necessary testing for the customer's applications and products using Ampleon products in order to avoid a default of the applications and the products or of the application or use by customer's third party customer(s). Ampleon does not accept any liability in this respect.

Limiting values — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) will cause permanent damage to the device. Limiting values are stress ratings only and (proper) operation of the device at these or any other conditions above those given in the Recommended operating conditions section (if present) or the Characteristics sections of this document is not warranted. Constant or repeated exposure to limiting values will permanently and irreversibly affect the quality and reliability of the device.

Terms and conditions of commercial sale — Ampleon products are sold subject to the general terms and conditions of commercial sale, as published at http://www.ampleon.com/terms, unless otherwise agreed in a valid written individual agreement. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. Ampleon hereby expressly objects to applying the customer's general terms and conditions with regard to the purchase of Ampleon products by customer.

No offer to sell or license — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

Export control — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from competent authorities.

BLF8G22LS-205V

All information provided in this document is subject to legal disclaimers.

© Ampleon Netherlands B.V. 2016. All rights reserved.

Non-automotive qualified products — Unless this data sheet expressly states that this specific Ampleon product is automotive qualified, the product is not suitable for automotive use. It is neither qualified nor tested in accordance with automotive testing or application requirements. Ampleon accepts no liability for inclusion and/or use of non-automotive qualified products in automotive equipment or applications.

In the event that customer uses the product for design-in and use in automotive applications to automotive specifications and standards, customer (a) shall use the product without Ampleon' warranty of the product for such automotive applications, use and specifications, and (b) whenever customer uses the product for automotive applications beyond Ampleon' specifications such use shall be solely at customer's own risk, and (c) customer fully indemnifies Ampleon for any liability, damages or failed product claims resulting from customer design and use of the product for automotive applications beyond Ampleon' standard warranty and Ampleon' product specifications.

Translations — A non-English (translated) version of a document is for reference only. The English version shall prevail in case of any discrepancy between the translated and English versions.

12.4 Trademarks

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

Any reference or use of any 'NXP' trademark in this document or in or on the surface of Ampleon products does not result in any claim, liability or entitlement vis-à-vis the owner of this trademark. Ampleon is no longer part of the NXP group of companies and any reference to or use of the 'NXP' trademarks will be replaced by reference to or use of Ampleon's own trademarks.

13. Contact information

For more information, please visit: http://www.ampleon.com

For sales office addresses, please visit: http://www.ampleon.com/sales

AMPLEON

BLF8G22LS-205V

Power LDMOS transistor

14. Contents

1	Product profile
1.1	General description
1.2	Features and benefits
1.3	Applications
2	Pinning information 2
3	Ordering information
4	Limiting values
5	Thermal characteristics 2
6	Characteristics
7	Test information
7.1	Ruggedness in Doherty operation 3
7.2	Impedance information 4
7.3	VBW in a class-AB operation 4
7.4	Test circuit
7.5	Graphical data 6
7.5.1	Pulsed CW 6
7.5.2	CW 6
7.5.3	1-Carrier W-CDMA
7.5.4	2-Tone VBW
8	Package outline 9
9	Handling information 10
10	Abbreviations
11	Revision history 10
12	Legal information
12.1	Data sheet status
12.2	Definitions
12.3	Disclaimers
12.4	Trademarks12
13	Contact information 12
14	Contents

Please be aware that important notices concerning this document and the product(s) described herein, have been included in section 'Legal information'.