

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China









Chip Ferrite Bead BLM18□□□□□Z1D Murata Standard Reference Specification[AEC-Q200]

1.Scope

This reference specification applies to Chip Ferrite Bead BLM18_□Z Series for Automotive Electronics based on AEC-Q200 except for Power train and Safety.

2.Part Numbering

(1)Product ID (4)Characteristics (7)Category(for Automotive Electronics)

(2)Type (5)Typical Impedance at 100MHz (8)Numbers of Circuit (3)Dimension (L×W) (6)Performance (9)Packaging (D:Taping)

3.Rating

3.Rating							
		Impedance ((at 100MHz)	(*1)	Rated	(Ω ma	esistance ax.) (*1)	
Customer	MURATA	(refer to below comment)		Current		to below	ESD Rank
Part Number	Part Number			(mA)	Initial	ment) Values	2:2kV
				at at	Values	After	
			Typical	85°C 125°C		Testing	
	BLM18PG300SZ1D	20 min.	30	1000	0.05	0.10	
	BLM18PG330SZ1D	33±25%	33	3000*2 1000*2	0.025	0.050	
	BLM18PG600SZ1D	40 min.	60	1000	0.1	0.2	
	BLM18PG121SZ1D	120±25%	120	2000*2 1000*2	0.05	0.10	
	BLM18PG181SZ1D	180±25%	180	1500*2 1000*2		0.18	
	BLM18PG221SZ1D	220±25%	220	1400*2 1000*2		0.14	
	BLM18PG331SZ1D	330±25%	330	1200*2 1000*2	0.15	0.20	
	BLM18PG471SZ1D	470±25%	470	1000	0.20	0.26	
	BLM18KG221SZ1D	220±25%	220	2200*2 1500*2	0.050	0.060	
	BLM18KG331SZ1D	330±25%	330	1700*2 1200*2	0.080	0.095	
	BLM18KG471SZ1D	470±25%	470	1500*2 1000*2	0.130	0.145	
	BLM18KG601SZ1D	600±25%	600	1300*2 1000*2	0.150	0.165	
	BLM18AG121SZ1D	120±25%	120	800	0.18	0.28	
	BLM18AG151SZ1D	150±25%	150	700	0.25	0.35	
	BLM18AG221SZ1D	220±25%	220	700	0.25	0.35	
	BLM18AG331SZ1D	330±25%	330	600	0.30	0.40	2
	BLM18AG471SZ1D	470±25%	470	550	0.35	0.45	
	BLM18AG601SZ1D	600±25%	600	500	0.38	0.48	
	BLM18AG102SZ1D	1000±25%	1000	450	0.50	0.60	
	BLM18BB050SZ1D	5±25%	5	800	0.05	0.10	
	BLM18BA050SZ1D	5±25%	5	500	0.2	0.3	
	BLM18BB100SZ1D	10±25%	10	700	0.10	0.20	
	BLM18BA100SZ1D	10±25%	10	500	0.25	0.35	
	BLM18BB220SZ1D	22±25%	22	700	0.20	0.30	
	BLM18BA220SZ1D	22±25%	22	500	0.35	0.45	
	BLM18BB470SZ1D	47±25%	47	600	0.25	0.35	
	BLM18BD470SZ1D	47±25%	47	500	0.3	0.4	
	BLM18BA470SZ1D	47±25%	47	300	0.55	0.65	
	BLM18BB600SZ1D	60±25%	60	600	0.25	0.35	
	BLM18BA750SZ1D	75±25%	75	300	0.70	0.80	
	BLM18BB750SZ1D	75±25%	75	600	0.30	0.40	
	BLM18BB121SZ1D	120±25%	120	550	0.30	0.40	

Customer	MURATA	Impedance (Ω) (at 100MHz)(*1) (refer to below comment)		Rated Current	(Ω ma	sistance ax.) (*1) to below	ESD Rank
Part Number	Part Number			(mA)	com	ment)	2:2kV
				at lat	Initial	Values After	
			Typical	at at 85°C 125°C	Values	Testing	
	BLM18BD121SZ1D	120±25%	120	300	0.4	0.5	
	BLM18BA121SZ1D	120±25%	120	200	0.9	1.0	
	BLM18BB141SZ1D	140±25%	140	500	0.35	0.45	
	BLM18BB151SZ1D	150±25%	150	450	0.37	0.47	
	BLM18BD151SZ1D	150±25%	150	300	0.4	0.5	
	BLM18BB221SZ1D	220±25%	220	450	0.45	0.55	
	BLM18BD221SZ1D	220±25%	220	250	0.45	0.55	
	BLM18BB331SZ1D	330±25%	330	400	0.58	0.68	
	BLM18BD331SZ1D	330±25%	330	250	0.5	0.6	
	BLM18BD421SZ1D	420±25%	420	250	0.55	0.65	
	BLM18BB471SZ1D	470±25%	470	300	0.85	0.95	
	BLM18BD471SZ1D	470±25%	470	250	0.55	0.65	
	BLM18BD601SZ1D	600±25%	600	200	0.65	0.75	
	BLM18BD102SZ1D	1000±25%	1000	200	0.85	0.95	
	BLM18BD152SZ1D	1500±25%	1500	150	1.2	1.3	2
	BLM18BD182SZ1D	1800±25%	1800	150	1.5	1.6	
	BLM18BD222SZ1D	2200±25%	2200	150	1.5	1.6	
	BLM18BD252SZ1D	2500±25%	2500	150	1.5	1.6	
	BLM18SG260TZ1D	26±25%	26	6000*2 1000*2	0.007	0.012	
	BLM18SG700TZ1D	70±25%	70	4000*2 1000*2	0.020	0.030	
	BLM18SG121TZ1D	120±25%	120	3000*2 1000*2	0.025	0.035	
	BLM18SG221TZ1D	220±25%	220	2500*2 1000*2	0.040	0.055	
	BLM18SG331TZ1D	330±25%	330	1500*2 1000*2	0.070	0.085	
	BLM18SN220TZ1D	22±7%	22	8000*2 5000*2	0.004	0.005	
	BLM18KG260TZ1D	26±25%	26	6000*2 4000*2	0.007	0.012	
	BLM18KG300TZ1D	30±25%	30	5000*2 3300*2	0.010	0.015	
	BLM18KG700TZ1D	70±25%	70	3500*2 2200*2	0.022	0.032	
	BLM18KG101TZ1D	100±25%	100	3000*2 1900*2	0.030	0.040	
	BLM18KG121TZ1D	120±25%	120	3000*2 1900*2	0.030	0.040	

• Operating Temperature : -55°C to +125°C

• Storage Temperature : -55°C to +125°C

Standard Testing Conditions


< Unless otherwise specified >

Temperature: Ordinary Temp. (15 °C to 35 °C)


Humidity: Ordinary Humidity (25%(RH) to 85%(RH))

(*2)In case of Rated current is more than 1A, Rated Current is derated as right figure depending on the operating temperature.


< In case of doubt > Temperature: 20°C±2 °C Humidity: 60%(RH) to 70%(RH) Atmospheric pressure: 86kPa to 106kPa



4. Style and Dimensions



■ Equivalent Circuit



Resistance element becomes dominant at high frequencies.

■ Unit Mass (Typical value)

BLM18****TZ1D	0.004g
BLM18*****SZ1D	0.005g

5.Marking

No marking.

6.Specifications

6-1. Electrical Performance

No.	Item	Specification	Test Method
6-1-1	Impedance	Meet item 3.	Measuring Frequency : 100MHz±1MHz Measuring Equipment : Agilent 4291A or the equivalent Test Fixture : Agilent 16192A or the equivalent
6-1-2	DC Resistance	Meet item 3.	Measuring Equipment : Digital multi meter For BLM18SN Measuring Equipment : YOKOGAWA 755611 or the equivalent Test Fixture : Agilent 16044A or the equivalent *Except resistance of the Substrate and Wire


6-2. Mechanical Performance(based on Table 13 for FILTER EMI SUPPRESSORS/FILTERS) AEC-Q200 Rev.D issued June. 1 2010

No.	Stress	C-Q200 Test Method	Murata Specification / Deviation				
3			Meet Table A after testing.				
3	High Temperature	1000hours at 125 deg C Set for 24hours at room	Table A after testing.				
	Exposure	temperature, then measured.	Appearance No damage				
	Σχροσαίο	lomporatore, then measured.	Impedance Within ±30%				
			Change (for BLM18SN				
			(at 100MHz) Within ±50%)				
			DC MARKET CONTRACTOR				
			Resistance Meet item 3.				
4	T	4000					
4	Temperature Cycling	1000cycles -55 deg C to +125 deg C	Meet Table B after testing. TableB				
		Set for 24hours at room	Appearance No damage				
		temperature, then measured.					
		lomporators, then measured.					
			I amange				
			(4.1.1.1.1.1.1.1.1.1.1.1.1.1.1.1.1.1.1.1				
			(for BLM18KG				
			Within-10%to+50%)				
			DC Resistance Meet item 3.				
5	Destructive	Per EIA469	No defects				
_	Physical Analysis	No electrical tests	M . T . L . O . 6				
7	Biased Humidity	1000hours at 85 deg C, 85%RH	Meet Table C after testing.				
		Apply max rated current.	<u>TableC</u>				
			Appearance No damage				
			Impedance Within ±30%				
			Change (for BLM18KG/SN				
			(at 100MHz) Within ±50%)				
			DC Meet item 3.				
			Resistance Neet tell 3.				
8	Operational Life	Apply 125 deg C 1000hours	Meet Table C after testing.				
	•	Set for 24hours at room	If the rated current of parts exceed 1A,				
		temperature, then measured	the operating temperature should be 85 deg C.				
9	External Visual	Visual inspection	No abnormalities				
4.0	B	14					
10	Physical Dimension	Meet ITEM 4	No defects				
		(Style and Dimensions)					
12	Resistance to Solvents		Not Applicable				
		Method 215					
13	Mechanical Shock	Per MIL-STD-202 Method 213	Meet Table D after testing.				
.0	Micorial modification	Condition F	Table D				
		1500g's (14.7N)/0.5ms/					
		Half sine	Appearance No damage				
			Impedance Within 1209/				
			Change Within ±30%				
			(at 100MHz)				
			DC Resistance Meet item 3.				
14	Vibration	5g's(0.049N) for 20 minutes,	Meet Table D after testing.				
		12cycles each of 3 orientations					
		Test from 10-2000Hz.					
15	Resistance	Solder temperature	Pre-heating:150C +/-10 deg,60s to 90s				
	to Soldering Heat	260C+/-5 deg C Immersion time 10s	Meet Table C after testing.				
			1				

		AEC-Q200	Murata Specification / Deviation
No	Stress	Test Method	
17	ESD	Per AEC-Q200-002	Meet Table D after testing. ESD Rank: Meet Item 3. (Rating)
18	Solderability	Per J-STD-002	Method b : Not Applicable 95% of the terminations is to be soldered.
19	Electrical Characterization	Measured : Impedance	No defects
20	Flammability	Per UL-94	Not Applicable
21	Board Flex	Epoxy-PCB(1.6mm) Deflection 2mm(min) 60s minimum holding tim	Meet Table C after testing.
22	Terminal Strength	Per AEC-Q200-006	No defects
30	Electrical Transient Conduction	Per ISO-7637-2	Not Applicable

7. Specification of Packaging

7-1.Appearance and Dimensions (8mm-wide paper tape)

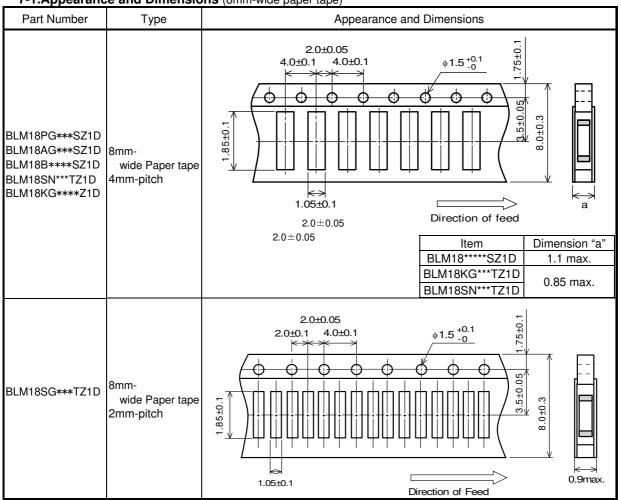

(1) Taping

Products shall be packaged in the cavity of the base tape of 8mm-wide,4mm-pitch continuously and sealed by top tape and bottom tape.

- (2) The sprocket holes are to the right as the tape is pulled toward the user.
- (3) Spliced point: The base tape and top tape have no spliced point
- (4) Cavity: There shall not be burr in the cavity.
- (5) Missing components number

Missing components number within 0.1% of the number per reel or 1 pc., whichever is greater, and are not continuous. The specified quantity per reel is kept.

7-2. Tape Strength



Top tape 5N min. Bottom tape

(2)Peeling off force of Top tape

0.1N to 0.6N (Minimum value is typical.) *Speed of Peeling off:300mm/min



Top tape

7-3. Taping Condition

(1)Standard quantity per reel

Quantity per 180mm reel: 4000 pcs. / reel

- (2) There shall be leader-tape (top tape and empty tape) and trailer- tape(empty tape) as follows.
- (3)On paper tape, the top tape and the base tape shall not be adhered at the tip of the empty leader tape for more than 5 pitch.
- (4)Marking for reel

The following items shall be marked on a label and the label is stuck on the reel.

(Customer part number, MURATA part number, Inspection number(*1), RoHS marking (*2), Quantity, etc)

*1) « Expression of Inspection No. »

0000 $\times \times \times$

165 to 180 degree

(1) Factory Code

(2) Date

First digit Second digit Year/ Last digit of year

: Month / Jan. to Sep. \rightarrow 1 to 9, Oct. to Dec. \rightarrow O, N, D

Third, Fourth digit: Day

(3) Serial No.

*2) « Expression of RoHS marking »

ROHS $-\frac{Y}{(1)}(\underline{\Delta})$


- (1) RoHS regulation conformity parts.
- (2) MURATA classification number

(5)Outside package

These reels shall be packed in the corrugated cardboard package and the following items shall be marked on a label and the label is stuck on the box.


(Customer name, Purchasing order number, Customer part number, MURATA part number, RoHS discrimination(*2), Quantity, etc)

(6) Dimensions of reel and taping (leader-tape, trailer-tape)

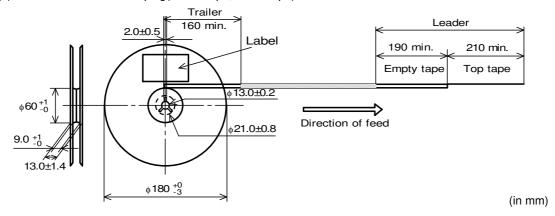



7-4. Specification of Outer Case



Outer Case Dimensions (mm)			Standard Reel Quantity in Outer Cas
W	D	Н	(Reel)
186	186	93	5

^{*} Above Outer Case size is typical. It depends on a quantity of an order.

8. 1 Caution

8-1.Rating

Do not use products beyond the Operating Temperature Range and Rated Current.

8-2.Surge current

Excessive surge current (pulse current or rush current) than specified rated current applied to the product may cause a critical failure, such as an open circuit, burnout caused by excessive temperature rise. Please contact us in advance in case of applying the surge current.

8-3.Fail Safe

Be sure to provide an appropriate fail-safe function on your product to prevent from a second damage that may be caused by the abnormal function or the failure of our products.

8-4.Limitation of Applications

Please contact us before using our products for the applications listed below which require especially high reliability for the prevention of defects which might directly cause damage to the third party's life, body or property.

(1)Aircraft equipment (6)Dis

(6)Disaster prevention / crime prevention equipment

(2)Aerospace equipment (3)Undersea equipment

(7)Traffic signal equipment (8)Transportation equipment (trains, ships, etc.)

(4)Power plant control equipment

(9) Applications of similar complexity and /or reliability requirements

(5)Medical equipment

to the applications listed in the above

9. Notice


This product is designed for solder mounting.

Please consult us in advance for applying other mounting method such as conductive adhesive.

9-1.Land pattern designing

• Standard land dimensions


< For BLM18 series (except BLM18PG/SG/KG/SN type) >



Туре	Soldering	а	b	С
BLM18	Flow		2.2 to 2.6	
(except 18PG, 18SG, 18KG,18SN type)	Reflow	0.7	1.8 to 2.0	0.7

(in mm)

< For BLM18PG, 18SG, 18KG, 18SN type >



Туре	Rated Current a		a b	C		pad thic dimens				
	(A)				18µm	35µm	70µm			
DIAMODO	0.5 to1.5				Flow	Flow		0.7	0.7	0.7
BLM18PG	1.7 to2.5	0.7	22 to 26	0.7 2.2 to 2.6 Reflow	0.7	1.2	0.7	0.7		
BLM18SG BLM18KG	3to4	0.7			0.7	2.4	1.2	0.7		
BLIVITONG	5to6				6.4	3.3	1.65			
BLM18SN	8	0.7	2.0	0.7	-	6.4	3.3			

(in mm)

9-2. Soldering Conditions

Products can be applied to reflow and flow soldering.

(1) Flux, Solder

Flux	Use rosin-based flux, but not highly acidic flux (with chlorine content exceeding 0.2(wt)%.)
	Do not use water-soluble flux.
Solder	Use Sn-3.0Ag-0.5Cu solder
	Standard thickness of solder paste : 100 μm to 200 μm

(2) Soldering conditions

• Pre-heating should be in such a way that the temperature difference between solder and ferrite surface is limited to 150°C max. Also cooling into solvent after soldering should be in such a way that the temperature difference is limited to 100°C max.


Insufficient pre-heating may cause cracks on the ferrite, resulting in the deterioration of product quality.

• Standard soldering profile and the limit soldering profile is as follows.

The excessive limit soldering conditions may cause leaching of the electrode and / or resulting in the deterioration of product quality.

(3) soldering profile


□Flow soldering profile

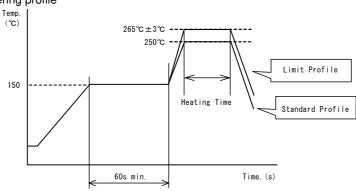

	Standard Profile	Limit Profile
Pre-heating	150°C、60s min.	
Heating	250°C、4∼6s	265°C±3°C, 5s max.
Cycle of flow	2 times	2 times

^{*}The excessive heat by land pads may cause deterioration at joint of products with substrate.

☐Reflow soldering profile

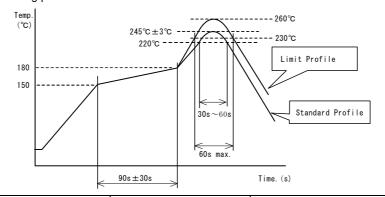

	Standard Profile	Limit Profile
Pre-heating	150~180°C 、90s±30s	
Heating	above 220°C、30s~60s	above 230°C、60s max.
Peak temperature	245±3°C	260°C,10s
Cycle of reflow	2 times	2 times


9-3. Reworking with soldering iron

- Pre-heating: 150°C, 1 min
- Soldering iron output: 80W max.
- Tip temperature: 350°C max.
- Tip diameter: ϕ 3mm max.
- Soldering time : 3(+1,-0) seconds.
- Times : 2times max.

Note :Do not directly touch the products with the tip of the soldering iron in order to prevent the crack on the ferrite material due to the thermal shock.

9-4.Solder Volume

Solder shall be used not to be exceeded as shown below.




Accordingly increasing the solder volume, the mechanical stress to product is also increased. Exceeding solder volume may cause the failure of mechanical or electrical performance.

9-5. Attention regarding P.C.B. bending


The following shall be considered when designing and laying out P.C.B.'s.

(1) P.C.B. shall be designed so that products are not subject to the mechanical stress for board warpage. <Products direction>



Products shall be located in the sideways direction (Length:a<b) to the mechanical stress.

(2)Products location on P.C.B. separation. Products (A,B,C,D) shall be located carefully so that products are not subject to the mechanical stress due to warping the board. Because they may be subjected the mechanical stress in order of A>C>B \cong D.



9-6. Mounting density

Add special attention to radiating heat of products when mounting the inductor near the products with heating. The excessive heat by other products may cause deterioration at joint of this product with substrate.



9-7. Operating Environment

Do not use this product under the following environmental conditions, on deterioration of the Insulation Resistance of the Ferrite material and/or corrosion of Inner Electrode may result from the use.

- (1) in the corrodible atmosphere (acidic gas, alkaline gas, chlorine, sulfur gas, organic gas and etc.)
- (2) in the atmosphere where liquid such as organic solvent, may splash on the products.
- (3) in the atmosphere where the temperature / humidity changes rapidly and it is easy to dew.

9-8. Resin coating

The impedance value may change and/or it may affect on the product's performance due to high cure-stress of resin to be used for coating / molding products. So please pay your careful attention when you select resin. In prior to use, please make the reliability evaluation with the product mounted in your application set.

9-9. Cleaning Conditions

Products shall be cleaned on the following conditions.

- (1)Cleaning temperature shall be limited to 60°C max. (40°C max. for IPA.)
- (2)Ultrasonic cleaning shall comply with the following conditions, avoiding the resonance phenomenon at the mounted products and P.C.B.

Power:20W/ ℓ max. Frequency:28kHz to 40kHz Time:5 min max.

(3)Cleaner

- 1.Alternative cleaner
 - •Isopropyl alcohol (IPA)
- 2. Aqueous agent
 - •PINE ALPHA ST-100S
- (4) There shall be no residual flux and residual cleaner after cleaning.

In the case of using aqueous agent, products shall be dried completely after rinse with de-ionized water in order to remove the cleaner.

(5)Other cleaning

Please contact us.

9-10. Handling of a substrate

After mounting products on a substrate, do not apply any stress to the product caused by bending or twisting to the substrate when cropping the substrate, inserting and removing a connector from the substrate or tightening screw to the substrate.

Excessive mechanical stress may cause cracking in the product.

Bendina

Twisting



9-11. Storage Conditions

(1)Storage period

Use the products within 6 months after delivered.

Solderability should be checked if this period is exceeded.

(2)Storage conditions

• Products should be stored in the warehouse on the following conditions.

Temperature : -10°C to 40°C

Humidity : 15% to 85% relative humidity No rapid change on temperature and humidity

- Don't keep products in corrosive gases such as sulfur, chlorine gas or acid, or it may cause oxidization of electrode, resulting in poor solderability.
- Products should be stored on the palette for the prevention of the influence from humidity, dust and so on.
- Products should be stored in the warehouse without heat shock, vibration, direct sunlight and so on.
- Products should be stored under the airtight packaged condition.

(3)Delivery

Care should be taken when transporting or handling product to avoid excessive vibration or mechanical shock.



Spec. No. JENF243A-9122G-01

10. 🗥 Note

- (1)Please make sure that your product has been evaluated in view of your specifications with our product being mounted to your product.
- (2) You are requested not to use our product deviating from the reference specifications.
- (3)The contents of this reference specification are subject to change without advance notice. Please approve our product specifications or transact the approval sheet for product specifications before ordering.

MURATA MFG.CO., LTD.

P.11/11