

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China







BLS9G2934L-400; BLS9G2934LS-400 LDMOS S-band radar power transistor

AMMPLEON

Rev. 1 — 6 April 2017

Product data sheet

Product profile

1.1 General description

Single ended 400 W LDMOS power transistor for S-band radar applications in the frequency range from 2.9 GHz to 3.4 GHz.

Typical performance Table 1.

Typical RF performance at T_{case} = 25 °C; t_{p} = 300 μs ; δ = 10 %; I_{Dq} = 400 mA; in a class-AB demo test circuit.

Test signal	f	V _{DS}	P _{L(1dB)}	Gp	η_{D}
	(GHz)	(V)	(W)	(dB)	(%)
pulsed RF	2.9 to 3.4	32	400	12	43

1.2 Features and benefits

- Single ended
- Small size
- High efficiency
- Excellent ruggedness
- Designed for S-band operation
- Excellent thermal stability
- Easy power control
- Integrated dual sided ESD protection enables excellent off-state isolation
- High flexibility with respect to pulse formats
- Internally matched for ease of use
- Compliant to Directive 2002/95/EC, regarding Restriction of Hazardous Substances (RoHS)

1.3 Applications

■ S-band radar applications in the frequency range 2.9 GHz to 3.4 GHz

2. Pinning information

Table 2. Pinning

Pin	Description		Simplified outline	Graphic symbol
BLS9G29	34L-400 (SOT502A)			
1	drain			
2	gate		\frac{1}{5\frac{1}{1}}_3	ئے ا
3	source	[1]	2	2 — 3 3 sym112
BLS9G29	34LS-400 (SOT502B)			
1	drain			_
2	gate		1 1 3	1 لـــا
3	source	[1]	2	2 — 3 sym112

^[1] Connected to flange.

3. Ordering information

Table 3. Ordering information

Type number	Package				
	Name	Description	Version		
BLS9G2934L-400	-	flanged ceramic package; 2 mounting holes; 2 leads	SOT502A		
BLS9G2934LS-400	-	earless flanged ceramic package; 2 leads	SOT502B		

4. Limiting values

Table 4. Limiting values

In accordance with the Absolute Maximum Rating System (IEC 60134).

Symbol	Parameter	Min	Max	Unit
V_{DS}	drain-source voltage	-	65	V
V_{GS}	gate-source voltage	-6	+11	V
T _{stg}	storage temperature	- 65	+150	°C
Tj	junction temperature [1]	-	225	°C

^[1] Continuous use at maximum temperature will affect the reliability. For details refer to the online MTF calculator.

5. Thermal characteristics

Table 5. Thermal characteristics

Symbol	Parameter	Conditions	Тур	Unit
Z _{th(j-case)}	transient thermal impedance from junction	T _{case} = 85 °C; P _L = 400 W		
	to case	t_p = 100 μ s; δ = 10 %	0.11	K/W
		t_p = 200 μ s; δ = 10 %	0.13	K/W
		t_p = 300 μ s; δ = 10 %	0.15	K/W
		t_p = 500 μ s; δ = 10 %	0.17	K/W
		t_p = 1 ms; δ = 10 %	0.18	K/W
		t_p = 100 μ s; δ = 20 %	0.15	K/W

6. Characteristics

Table 6. DC characteristics

 $T_i = 25 \, ^{\circ}$ C unless otherwise specified.

Symbol	Parameter	Conditions	Min	Тур	Max	Unit
V _{(BR)DSS}	drain-source breakdown voltage	$V_{GS} = 0 \text{ V}; I_D = 4.5 \text{ mA}$	65	-	-	V
V _{GS(th)}	gate-source threshold voltage	V _{DS} = 10 V; I _D = 450 mA	1.5	2.0	3.1	V
I _{DSS}	drain leakage current	V _{GS} = 0 V; V _{DS} = 32 V	-	-	4	μΑ
I _{DSX}	drain cut-off current	$V_{GS} = V_{GS(th)} + 3.75 \text{ V};$ $V_{DS} = 10 \text{ V}$	-	85	-	Α
I _{GSS}	gate leakage current	V _{GS} = 11 V; V _{DS} = 0 V	-	-	400	nA
9 _{fs}	forward transconductance	V _{DS} = 10 V; I _D = 450 mA	-	4.1	-	S
R _{DS(on)}	drain-source on-state resistance	$V_{GS} = V_{GS(th)} + 3.75 \text{ V};$ $I_D = 15.75 \text{ A}$	-	0.030	0.060	Ω

Table 7. RF characteristics

Test signal: pulsed RF; 2.9 GHz \leq f \leq 3.4 GHz; t_p = 300 μ s; δ = 10 %; RF performance at V_{DS} = 32 V; I_{Dq} = 400 mA; T_{case} = 25 °C; unless otherwise specified, in a class-AB narrow band production circuit.

Symbol	Parameter	Conditions	Min	Тур	Max	Unit
Gp	power gain	P _L = 400 W	10	11	-	dB
η_{D}	drain efficiency	P _L = 400 W	40	43	-	%
RLin	input return loss	P _L = 400 W	-	-8	-	dB
P _{droop(pulse)}	pulse droop power	P _L = 400 W	-	0.15	0.5	dB
t _r	rise time	P _L = 400 W	-	6	50	ns
t _f	fall time	P _L = 400 W	-	6	50	ns
P _{L(2dB)}	output power at 2 dB gain compression		400	-	-	W

7. Test information

7.1 Ruggedness in class-AB operation


The BLS9G2934L-400 and BLS9G2934LS-400 are capable of withstanding a load mismatch corresponding to VSWR = 10 : 1 through all phases under the following conditions: V_{DS} = 32 V; I_{Dq} = 400 mA; P_{L} = 400 W; I_{Dq} = 300 I_{LS} ; I_{Dq} = 400 mA; I_{Dq} = 400 m

7.2 Impedance information


Table 8. Typical impedance

f	Z _S [1]	Z _L [1]
(GHz)	(Ω)	(Ω)
2.9	1.24 – j5.79	1.10 – j3.97
3.0	3.36 – j6.81	1.74 – j3.98
3.1	7.10 – j3.33	2.49 – j3.43
3.2	3.51 – j0.05	2.50 – j3.43
3.3	1.74 – j0.92	2.76 – j3.70
3.4	1.31 – j1.89	1.89 – j3.16

[1] Impedances are taken at a single halve of the push-pull transistor

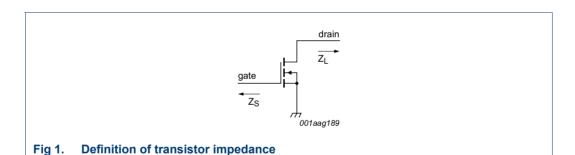

7.3 Test circuit

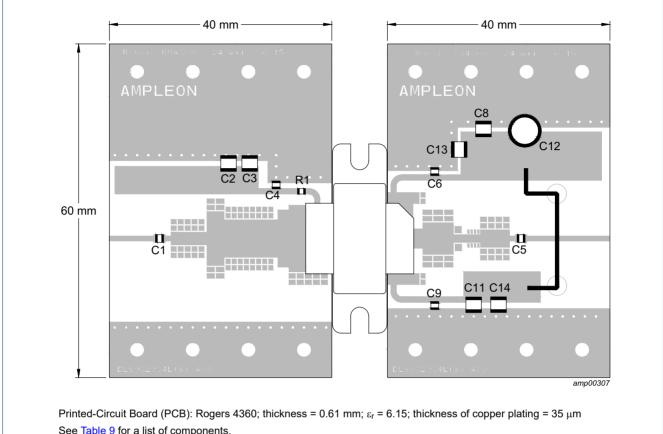


See Table 9 for a list of components.

Fig 2. Component layout for class-AB production test circuit

Table 9. List of components For test circuit see Figure 2.

Component	Description	Value	Remarks
C1, C4	multilayer ceramic chip capacitor	10 pF	ATC100A
C2	multilayer ceramic chip capacitor	4.7 μF	
C3, C8, C11	multilayer ceramic chip capacitor	1 nF	ATC100B
C5	multilayer ceramic chip capacitor	5.1 pF	ATC100A
C6, C9	multilayer ceramic chip capacitor	10 pF	ATC800A
C12	electrolytic capacitor	100 μF, 63 V	
C13, C14	multilayer ceramic chip capacitor	10 μF	Murata: GRM55DR61H106KA88L
R1	resistor	5 Ω	SMD 0603


7.4 Graphical data



 V_{DS} = 32 V; I_{Dq} = 400 mA; P_L = 400 W; t_p = 300 $\mu s;$ δ = 10 %.

- (1) G_p
- (2) η_D


Fig 3. Power gain and drain efficiency as function of frequency; typical values



 V_{DS} = 32 V; I_{Dq} = 400 mA; t_p = 300 μ s; δ = 10 %.

- (1) P_{1dB}
- (2) P_{2dB}
- (3) P_{3dB}


Fig 4. Output power as a function of frequency; typical values



 V_{DS} = 32 V; I_{Dq} = 400 mA; t_p = 300 μ s; δ = 10 %.

- (1) f = 2900 MHz
- (2) f = 3000 MHz
- (3) f = 3100 MHz
- (4) f = 3200 MHz
- (5) f = 3300 MHz
- (6) f = 3400 MHz

Fig 5. Drain efficiency as a function of output power; typical values



 V_{DS} = 32 V; I_{Dq} = 400 mA; t_p = 300 $\mu s; \, \delta$ = 10 %.


- (1) f = 2900 MHz
- (2) f = 3000 MHz
- (3) f = 3100 MHz
- (4) f = 3200 MHz
- (5) f = 3300 MHz(6) f = 3400 MHz

Fig 6. Power gain as a function of output power; typical values

BLS9G2934L-400_LS-400

All information provided in this document is subject to legal disclaimers.

© Ampleon Netherlands B.V. 2017. All rights reserved.




 V_{DS} = 32 V; I_{Dq} = 400 mA; t_p = 300 μ s; δ = 10 %.

- (1) f = 2900 MHz
- (2) f = 3000 MHz
- (3) f = 3100 MHz
- (4) f = 3200 MHz
- (5) f = 3300 MHz
- (6) f = 3400 MHz


Fig 7. Output power as a function of input power; typical values

7 of 13

8. Package outline



SOT502A

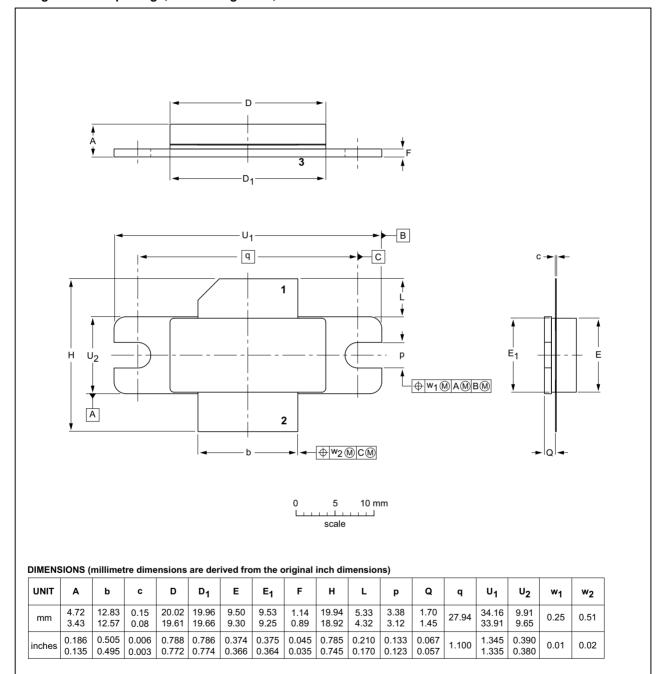


OUTLINE		REFERENCES			EUROPEAN ISSUE DATE		
VERSION	IEC	JEDEC	JEITA		PROJECTION	ISSUE DATE	
SOT502A						-03-01-10 - 12-05-02	

Fig 8. Package outline SOT502A

Earless flanged ceramic package; 2 leads

SOT502B

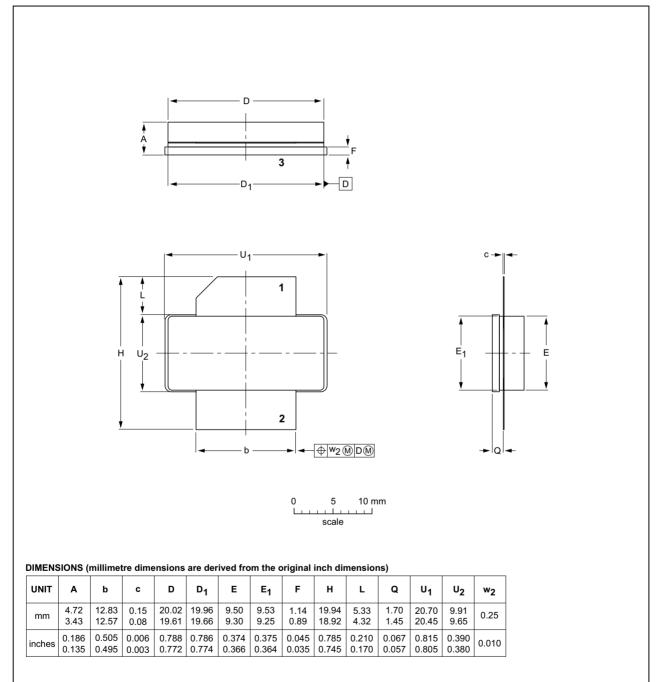

OUTLINE VERSION IEC JEDEC JEITA

SOT502B

REFERENCES

EUROPEAN PROJECTION

O7-05-0912-05-02

Fig 9. Package outline SOT502B

9. Handling information

CAUTION



This device is sensitive to ElectroStatic Discharge (ESD). Observe precautions for handling electrostatic sensitive devices.

Such precautions are described in the ANSI/ESD S20.20, IEC/ST 61340-5, JESD625-A or equivalent standards.

Table 10. ESD sensitivity

ESD model	Class
Charged Device Model (CDM); According to ANSI/ESDA/JEDEC standard JS-002	C2A [1]
Human Body Model (HBM); According to ANSI/ESDA/JEDEC standard JS-001	2 [2]

- [1] CDM classification C2A is granted to any part that passes after exposure to an ESD pulse of 500 V, but fails after exposure to an ESD pulse of 750 V.
- [2] HBM classification 2 is granted to any part that passes after exposure to an ESD pulse of 2000 V, but fails after exposure to an ESD pulse of 4000 V.

10. Abbreviations

Table 11. Abbreviations

Acronym	Description
ESD	ElectroStatic Discharge
LDMOS	Laterally Diffused Metal-Oxide Semiconductor
MTF	Median Time to Failure
S-band	Short wave Band
SMD	Surface Mounted Device
VSWR	Voltage Standing-Wave Ratio

11. Revision history

Table 12. Revision history

Document ID	Release date	Data sheet status	Change notice	Supersedes
BLS9G2934L-400_LS-400 v.1	20170406	Product data sheet	-	-

12. Legal information

12.1 Data sheet status

Document status[1][2]	Product status[3]	Definition
Objective [short] data sheet	Development	This document contains data from the objective specification for product development.
Preliminary [short] data sheet	Qualification	This document contains data from the preliminary specification.
Product [short] data sheet	Production	This document contains the product specification.

- [1] Please consult the most recently issued document before initiating or completing a design.
- [2] The term 'short data sheet' is explained in section "Definitions"
- [3] The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the Internet at URL http://www.ampleon.com.

12.2 Definitions

Draft — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. Ampleon does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

Short data sheet — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local Ampleon sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

Product specification — The information and data provided in a Product data sheet shall define the specification of the product as agreed between Ampleon and its customer, unless Ampleon and customer have explicitly agreed otherwise in writing. In no event however, shall an agreement be valid in which the Ampleon product is deemed to offer functions and qualities beyond those described in the Product data sheet.

12.3 Disclaimers

Limited warranty and liability — Information in this document is believed to be accurate and reliable. However, Ampleon does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. Ampleon takes no responsibility for the content in this document if provided by an information source outside of Ampleon.

In no event shall Ampleon be liable for any indirect, incidental, punitive, special or consequential damages (including - without limitation - lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory.

Notwithstanding any damages that customer might incur for any reason whatsoever, Ampleon's aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the *Terms and conditions of commercial sale* of Ampleon.

Right to make changes — Ampleon reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

Suitability for use — Ampleon products are not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of an

Ampleon product can reasonably be expected to result in personal injury, death or severe property or environmental damage. Ampleon and its suppliers accept no liability for inclusion and/or use of Ampleon products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

Applications — Applications that are described herein for any of these products are for illustrative purposes only. Ampleon makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Customers are responsible for the design and operation of their applications and products using Ampleon products, and Ampleon accepts no liability for any assistance with applications or customer product design. It is customer's sole responsibility to determine whether the Ampleon product is suitable and fit for the customer's applications and products planned, as well as for the planned application and use of customer's third party customer(s). Customers should provide appropriate design and operating safeguards to minimize the risks associated with their applications and products.

Ampleon does not accept any liability related to any default, damage, costs or problem which is based on any weakness or default in the customer's applications or products, or the application or use by customer's third party customer(s). Customer is responsible for doing all necessary testing for the customer's applications and products using Ampleon products in order to avoid a default of the applications and the products or of the application or use by customer's third party customer(s). Ampleon does not accept any liability in this respect.

Limiting values — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) will cause permanent damage to the device. Limiting values are stress ratings only and (proper) operation of the device at these or any other conditions above those given in the Recommended operating conditions section (if present) or the Characteristics sections of this document is not warranted. Constant or repeated exposure to limiting values will permanently and irreversibly affect the quality and reliability of the device.

Terms and conditions of commercial sale — Ampleon products are sold subject to the general terms and conditions of commercial sale, as published at http://www.ampleon.com/terms, unless otherwise agreed in a valid written individual agreement. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. Ampleon hereby expressly objects to applying the customer's general terms and conditions with regard to the purchase of Ampleon products by customer.

No offer to sell or license — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

Export control — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from competent authorities.

BLS9G2934L(S)-400

LDMOS S-band radar power transistor

Non-automotive qualified products — Unless this data sheet expressly states that this specific Ampleon product is automotive qualified, the product is not suitable for automotive use. It is neither qualified nor tested in accordance with automotive testing or application requirements. Ampleon accepts no liability for inclusion and/or use of non-automotive qualified products in automotive equipment or applications.

In the event that customer uses the product for design-in and use in automotive applications to automotive specifications and standards, customer (a) shall use the product without Ampleon' warranty of the product for such automotive applications, use and specifications, and (b) whenever customer uses the product for automotive applications beyond Ampleon' specifications such use shall be solely at customer's own risk, and (c) customer fully indemnifies Ampleon for any liability, damages or failed product claims resulting from customer design and use of the product for automotive applications beyond Ampleon' standard warranty and Ampleon' product

Translations — A non-English (translated) version of a document is for reference only. The English version shall prevail in case of any discrepancy between the translated and English versions.

12.4 Trademarks

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

Any reference or use of any 'NXP' trademark in this document or in or on the surface of Ampleon products does not result in any claim, liability or entitlement vis-à-vis the owner of this trademark. Ampleon is no longer part of the NXP group of companies and any reference to or use of the 'NXP' trademarks will be replaced by reference to or use of Ampleon's own trademarks.

13. Contact information

For more information, please visit: http://www.ampleon.com

For sales office addresses, please visit: http://www.ampleon.com/sales

AMPLEON

BLS9G2934L(S)-400

LDMOS S-band radar power transistor

14. Contents

1	Product profile
1.1	General description
1.2	Features and benefits
1.3	Applications
2	Pinning information
3	Ordering information
4	Limiting values
5	Thermal characteristics
6	Characteristics
7	Test information
7.1	Ruggedness in class-AB operation
7.2	Impedance information
7.3	Test circuit
7.4	Graphical data
8	Package outline
9	Handling information
10	Abbreviations
11	Revision history
12	Legal information11
12.1	Data sheet status 1
12.2	Definitions
12.3	Disclaimers 1
12.4	Trademarks12
13	Contact information
14	Contents 13

Please be aware that important notices concerning this document and the product(s) described herein, have been included in section 'Legal information'.