# imall

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832 Email & Skype: info@chipsmall.com Web: www.chipsmall.com Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



#### Bussmann®

### Supplementary Fuseblocks Type M, For <sup>13</sup>/<sub>32</sub>" × 1½" Fuses 600 Volt AC, $\frac{1}{10}$ to 30 Amps

### **BM** Series

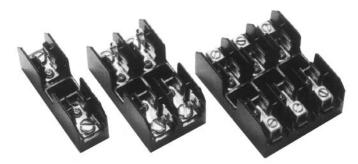

Catalog Symbol: BM Series **Type M Supplementary Fuseblocks** Ampere Rating: 1/10 to 30 Amperes Voltage Rating: 600 Volts AC Withstand Rating: 10,000 A RMS Sym. or interrupting rating of the fuse used, whichever is lower. **Agency Information:** U.L. Recognized, U.L. 512, Guide IZLT2, File E14853

CSA Certified, C22.2 No. 39, Class 6225-01, File 47235 For use with any 13/32" × 11/2" Fuses (Bussmann KTK, FNQ, FNM, BAF, BAN and AGU) U.L. Flammability: 94 V0 Material: Thermoplastic

> **Terminal Type** Screw with

Quick


Connect\*


BM6031SQ


BM6032SQ

BM6033SQ

**Dimensional Data** All dimensions (±0.015)





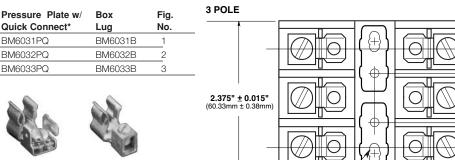

\* QUICK CONNECT RATED FOR 20A MAXIMUM.

#10-#18

#10-#18

CE logo denotes compliance with European Union Low Voltage Directive

(50-1000 Vac, 75-1500 Vdc). Refer to BIF document #8002 or contact Bussmann Application Engineering at 636-527-1270 for more information.

#6-#14

Catalog Data (600V)

Poles

1

2

3


Amps

1/10

to

30

Wire Range CU Only



FUSEBLOCK LABEL (EXAMPLE SHOWN)

Buss BM6032SQ 1.210" ± 0.015" (30.73mm ± 0.38mm) UIS, MO 30A 600V QUIK CON. 20A <u>ы</u> RMS SYM 10,000A CU ONLY 10-14 20 LB IN.

The only controlled copy of this BIF document is the electronic read-only version located on the Bussmann Network Drive. All other copies of this document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.



Form No. BM Series Page 1 of 1 BIF Doc #1104

xxx>

1.530" (38.86mm)