

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China










20 A Snubberless™ Triacs

Datasheet - production data

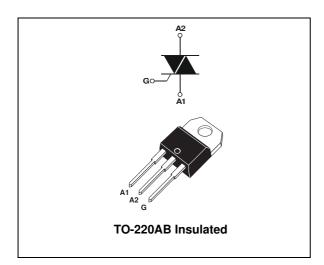

Features

- I_{T(RMS)} = 20 A
- V_{DRM}, V_{RRM} = 600 and 700 V
- I_{GT (Q1)} (max) = 35 and 50 mA

Description

The BTA20 Triacs use high performance glass passivated chip technology. The Snubberless concept offers suppression of the RC network and is suitable for applications such as phase control and static switching on inductive or resistive load.

Thanks to their clip assembly technique, the BTA20 Triacs provide a superior performance in surge current handling capabilities.

By using an internal ceramic pad, the BTA series provides voltage insulated tab (rated at 2500 V rms) complying with UL standards (File ref.: E81734).

TM: Snubberless is a trademark of STMicroelectronics.

Characteristics BTA20

1 Characteristics

Table 1. Absolute maximum ratings

Symbol	Paramete		Value	Unit		
I _{T(RMS)}	On-state rms current (full sine wave)		T _c = 70 °C	20	Α	
I -	Non repetitive surge peak on-state	F = 50 Hz	t = 10 ms	210	Α	
I _{TSM}	current (full cycle, T _j initial = 25°C)	F = 60 Hz	t = 8.3 ms	200	A	
l ² t	I ² t Value for fusing	t _p = 10 ms		200	A ² s	
dl/dt	Critical rate of rise of on-state current	Repetitive F = 50 Hz	T _i = 125 °C	50	A/μs	
	$I_G = 2 \times I_{GT}, t_r \le 100 \text{ ns}$	Non repetitive	,	100		
V _{DSM} , V _{RSM}	Non repetitive peak off-state voltage $t_p = 10 \text{ ms}$		T _j = 25 °C	V _{DRM} /V _{RRM} 100	V	
I _{GM}	Peak gate current	t _p = 20 μs	T _j = 125 °C	4	Α	
V _{GM}	Peak positive gate voltage $t_p = 20 \mu s$		16	V		
P _{G(AV)}	Average gate power dissipation $T_j = 125 ^{\circ}\text{C}$		1	W		
T _{stg}	Storage junction temperature range	- 40 to + 150	°C			
T _j	Operating junction temperature range	- 40 to + 125	J			

Table 2. Electrical characteristics (T_j = 25 °C, unless otherwise specified)

Symbol	Test conditions	Quadrant		BTA20		Unit	
Symbol	rest conditions	Quadrant		BW	CW	Jill	
I _{GT} ⁽¹⁾	$V_D = 12 \text{ V}, R_L = 33 \Omega$	A1.1	Min.	2	1	mA	
'GT `		ALL	Max.	50	35	IIIA	
V _{GT}		ALL	Max.	1.5		V	
V_{GD}	$V_D = V_{DRM}$, $R_L = 3.3 \text{ k}\Omega$, $T_j = 125 \text{ °C}$	ALL	Min.	0	.2	٧	
I _H ⁽²⁾	I _T = 500 mA, gate open		Max.	75	50	mA	
	I _G = 1.2 I _{GT}	I - III	Tun	50	-	mA	
IL		II	Тур.	90	-		
		1 - 11 - 111	Max.	-	80		
dV/dt (2)	V _D = 67% V _{DRM,} gate open	T _j = 125 °C	Тур.	750	500	1//	
a v/at · /			Min.	500	250	- V/μs	
(dV/dt)c (2)	(dl/dt)c = 20 A/ms	T _j = 125 °C	Тур.	36	22	1///	
			Min.	18	11	- V/μs	

^{1.} Minimum $I_{\mbox{\scriptsize GT}}$ is guaranteed at 5% of $I_{\mbox{\scriptsize GT}}$ max.



^{2.} For both polarities of A2 referenced to A1.

BTA20 Characteristics

Table	2	Ctatia	ahara	ecteristics	
Table	.3.	Static	cnara	icieristics	

Symbol		Value	Unit		
V _{TM} ⁽¹⁾	$I_{TM} = 28 \text{ A}, t_p = 380 \mu\text{s}$	T _j = 125 °C	Max.	1.70	V
I _{DRM}	V V	T _j = 125 °C	Max.	10	μΑ
I _{RRM}	$V_{DRM} = V_{RRM}$	T _j = 125 °C	iviax.	3	mA


^{1.} For both polarities of A2 referenced to A1.

Table 4. Thermal resistances

Symbol	Parameter	Value	Unit
R _{th(j-c)}	Junction to case for AC	2.1	
R _{th(j-c)}	Junction to case for DC	2.8	°C/W
R _{th(j-a)}	Junction to ambient	60	

Figure 1. Maximum power dissipation versus on-state rms current (full cycle)


Figure 2. Correlation between maximum rms power dissipation and maximum allowable temperatures

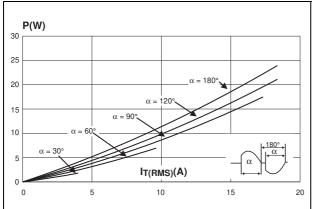


P(W) T_{case}(°C) 30 65 R_{th} = 0°C/W 75 25 20 85 15 10 105 5 (Tamb and Tcase) for different thermal 115 resistances heatsink + contact T_{amb}(°C) 0 125 0 20

Figure 3. On-state rms current versus case temperature (full cycle)

Figure 4. Relative variation of thermal impedance versus pulse duration

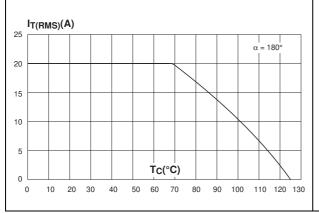

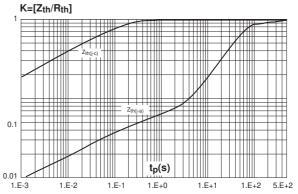

Characteristics BTA20

Figure 5. On-state characteristics (maximum values)

Figure 6. Non repetitive surge peak on-state current versus number of cycles


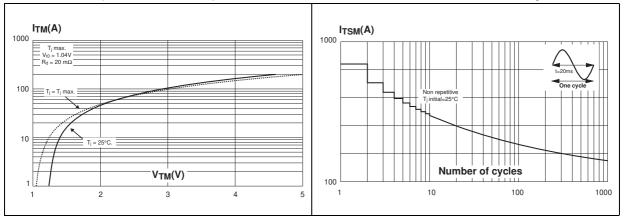


Figure 7. Non repetitive surge peak on-state current for a sinusoidal pulse and corresponding value of I²t

Figure 8. Relative variation of gate trigger current and holding current versus junction temperature

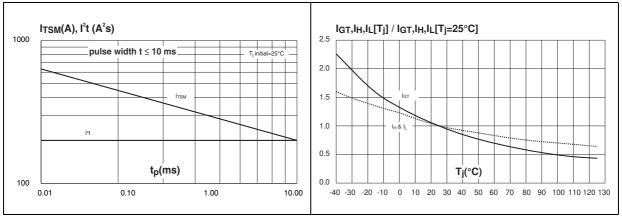

57

BTA20 Package information

2 Package information

- Epoxy meets UL94, V0
- Lead-free package

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK[®] packages, depending on their level of environmental compliance. ECOPACK[®] specifications, grade definitions and product status are available at: www.st.com. ECOPACK[®] is an ST trademark.

С В b2 Ø١ F Gate note1 14 13 c2 a1 12 a2 с1 b1

Figure 9. TO-220AB package dimensions (definitions)

Package information BTA20

Table 5. TO-220AB package dimension values

	Dimensions					
Ref.	Millimeters			Inches		
	Min.	Тур.	Max.	Min.	Тур.	Max.
Α	15.20		15.90	0.598		0.625
a1		3.75			0.147	
a2	13.00		14.00	0.511		0.551
В	10.00		10.40	0.393		0.409
b1	0.61		0.88	0.024		0.034
b2	1.23		1.32	0.048		0.051
С	4.40		4.60	0.173		0.181
c1	0.49		0.70	0.019		0.027
c2	2.40		2.72	0.094		0.107
е	2.40		2.70	0.094		0.106
F	6.20		6.60	0.244		0.259
I	3.75		3.85	0.147		0.151
14	15.80	16.40	16.80	0.622	0.646	0.661
L	2.65		2.95	0.104		0.116
12	1.14		1.70	0.044		0.066
13	1.14		1.70	0.044		0.066
М		2.60			0.102	

BTA20 Ordering information

3 Ordering information

Figure 10. Ordering information scheme

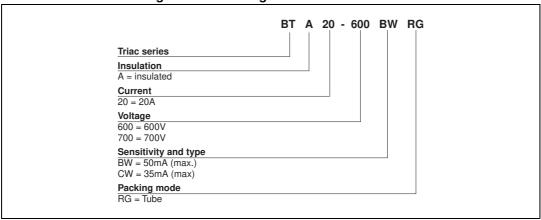


Table 6. Product selector

Order code	Volt	tage	Sensitivity	Type	Package
Order code	600 V	700 V	Sensitivity	туре	Package
BTA20-600CWRG	Χ		35 mA		
BTA20-700BWRG		Х	50 mA	Snubberless	TO-220AB Ins.
BTA20-700CWRG		Х	35 mA		

Table 7. Ordering information

Ordering type	Marking	Package	Weight	Base qty	Delivery mode
BTA20-600CWRG	BTA20-600CW				
BTA20-700BWRG	BTA20-700BW	TO-220AB Ins.	2.3 g	50	Tube
BTA20-700CWRG	BTA20-700CW				

4 Revision history

Table 8. Document revision history

Date	Revision	Changes
Sep-2001	1A	Initial release.
08-Feb-2006	2	TO-220AB Ins. delivery mode changed from bulk to tube.
09-Jul-2012	3	Updated dl/dt repetitive value in Table 1.
01-Sep-2014	4	Updated V _{DRM} /V _{RRM} value in <i>Table 1</i> .

IMPORTANT NOTICE - PLEASE READ CAREFULLY

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2014 STMicroelectronics - All rights reserved

