# imall

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



# Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832 Email & Skype: info@chipsmall.com Web: www.chipsmall.com Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



# ne<mark>x</mark>peria

#### Important notice

Dear Customer,

On 7 February 2017 the former NXP Standard Product business became a new company with the tradename **Nexperia**. Nexperia is an industry leading supplier of Discrete, Logic and PowerMOS semiconductors with its focus on the automotive, industrial, computing, consumer and wearable application markets

In data sheets and application notes which still contain NXP or Philips Semiconductors references, use the references to Nexperia, as shown below.

Instead of <u>http://www.nxp.com</u>, <u>http://www.philips.com/</u> or <u>http://www.semiconductors.philips.com/</u>, use <u>http://www.nexperia.com</u>

Instead of sales.addresses@www.nxp.com or sales.addresses@www.semiconductors.philips.com, use **salesaddresses@nexperia.com** (email)

Replace the copyright notice at the bottom of each page or elsewhere in the document, depending on the version, as shown below:

- © NXP N.V. (year). All rights reserved or © Koninklijke Philips Electronics N.V. (year). All rights reserved

Should be replaced with:

- © Nexperia B.V. (year). All rights reserved.

If you have any questions related to the data sheet, please contact our nearest sales office via e-mail or telephone (details via **salesaddresses@nexperia.com**). Thank you for your cooperation and understanding,

Kind regards,

Team Nexperia



# **BZV55 series** Voltage regulator diodes Rev. 5 — 26 January 2011

Product data sheet

#### **Product profile** 1.

### **1.1 General description**

Low-power voltage regulator diodes in small hermetically sealed glass SOD80C Surface-Mounted Device (SMD) packages. The diodes are available in the normalized E24  $\pm$ 2 % (BZV55-B) and approximately  $\pm$ 5 % (BZV55-C) tolerance range. The series consists of 37 types with nominal working voltages from 2.4 V to 75 V.

### **1.2 Features and benefits**

- Non-repetitive peak reverse power dissipation:  $\leq$  40 W
- Total power dissipation: ≤ 500 mW
- Two tolerance series: ±2 % and ±5 %
- Wide working voltage range: nominal 2.4 V to 75 V (E24 range)
- Low differential resistance
- Small hermetically sealed glass SMD package

### **1.3 Applications**

General regulation functions

### 1.4 Quick reference data

#### Table 1. Quick reference data

Symbol	Parameter	Conditions	Min	Тур	Мах	Unit
$V_{F}$	forward voltage	I <sub>F</sub> = 10 mA	-	-	0.9	V
P <sub>ZSM</sub>	non-repetitive peak reverse power dissipation		[1] -	-	40	W

[1]  $t_p = 100 \ \mu s$ ; square wave;  $T_j = 25 \ ^\circ C$  prior to surge

#### 2. **Pinning information**

Pin	Description	Simplified outline	Graphic symbol
1	cathode	[1]	
2	anode	k a	1 2 006aaa152

[1] The marking band indicates the cathode.



Voltage regulator diodes

### 3. Ordering information

Type number	Package	Package	
	Name	Description	Version
BZV55-B2V4 to BZV55-C75 <mark>11</mark>	-	hermetically sealed glass surface-mounted package; 2 connectors	SOD80C

[1] The series consists of 74 types with nominal working voltages from 2.4 V to 75 V.

### 4. Marking

Table 4.	Marking codes	
Type num	ber	Marking code
BZV55-B2	V4 to BZV55-C75	marking band

### 5. Limiting values

#### Table 5. Limiting values

In accordance with the Absolute Maximum Rating System (IEC 60134).

		0, 1	,		
Symbol	Parameter	Conditions	Min	Max	Unit
I <sub>F</sub>	forward current		-	250	mA
I <sub>ZSM</sub>	non-repetitive peak reverse current		[1] -	see <u>Table 8</u> and <u>9</u>	
P <sub>ZSM</sub>	non-repetitive peak reverse power dissipation		[1] -	40	W
P <sub>tot</sub>	total power dissipation	$T_{amb} \le 50 \ ^{\circ}C$	[2] -	400	mW
		$T_{tp} \le 50 \ ^{\circ}C$	[2] _	500	mW
T <sub>stg</sub>	storage temperature		-65	+200	°C
Tj	junction temperature		-65	+200	°C

[1]  $t_p = 100 \ \mu s$ ; square wave;  $T_j = 25 \ ^\circ C$  prior to surge

[2] Device mounted on a ceramic substrate of  $10 \times 10 \times 0.6$  mm.

### 6. Thermal characteristics


Table 6.	Thermal characteristics					
Symbol	Parameter	Conditions	Min	Тур	Max	Unit
R <sub>th(j-a)</sub>	thermal resistance from junction to ambient	in free air	[1] -	-	380	K/W
$R_{th(j-sp)}$	thermal resistance from junction to solder point		-	-	300	K/W

[1] Device mounted on a ceramic substrate of  $10 \times 10 \times 0.6$  mm.

### **NXP Semiconductors**

# **BZV55 series**

Voltage regulator diodes

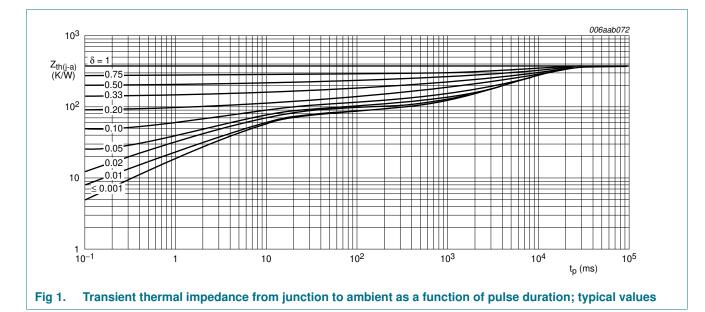

### 7. Characteristics

#### Table 7.Characteristics

 $T_i = 25 \ ^{\circ}C$  unless otherwise specified.

Symbol	Parameter	Conditions	Min	Тур	Max	Unit
V <sub>F</sub>	forward voltage	I <sub>F</sub> = 10 mA	-	-	0.9	V
I <sub>R</sub>	reverse current					
	BZV55-B/C2V4	$V_R = 1 V$	-	-	50	μA
	BZV55-B/C2V7	$V_R = 1 V$	-	-	20	μA
	BZV55-B/C3V0	$V_{R} = 1 V$	-	-	10	μA
	BZV55-B/C3V3	$V_{R} = 1 V$	-	-	5	μA
	BZV55-B/C3V6	$V_R = 1 V$	-	-	5	μA
	BZV55-B/C3V9	$V_R = 1 V$	-	-	3	μA
	BZV55-B/C4V3	$V_R = 1 V$	-	-	3	μA
	BZV55-B/C4V7	$V_R = 2 V$	-	-	3	μA
	BZV55-B/C5V1	$V_R = 2 V$	-	-	2	μA
	BZV55-B/C5V6	$V_R = 2 V$	-	-	1	μ <b>A</b>
	BZV55-B/C6V2	$V_R = 4 V$	-	-	3	μ <b>A</b>
	BZV55-B/C6V8	$V_R = 4 V$	-	-	2	μA
	BZV55-B/C7V5	$V_R = 5 V$	-	-	1	μA
	BZV55-B/C8V2	$V_R = 5 V$	-	-	700	nA
	BZV55-B/C9V1	$V_R = 6 V$	-	-	500	nA
	BZV55-B/C10	$V_R = 7 V$	-	-	200	nA
	BZV55-B/C11	V <sub>R</sub> = 8 V	-	-	100	nA
	BZV55-B/C12	V <sub>R</sub> = 8 V	-	-	100	nA
	BZV55-B/C13	V <sub>R</sub> = 8 V	-	-	100	nA
	BZV55-B/C15 to BZV55-B/C75	$V_{R} = 0.7 V_{Z(nom)}$	-	-	50	nA

Voltage regulator diodes

BZV55- xxx	Sel	Worki voltag V <sub>Z</sub> (V)	e	Differ r <sub>dif</sub> (Ω	rential r 2)	resistar	nce	Temp coeffi S <sub>Z</sub> (m			Diode capacitance C <sub>d</sub> (pF)[ <u>1]</u>	Non-repetitive peak reverse current
		l <sub>z</sub> = 5		I <sub>Z</sub> = 1	mA	I <sub>Z</sub> = 5	mA	I <sub>Z</sub> = 5				I <sub>ZSM</sub> (A) <sup>[2]</sup>
		- Min	Max	Тур	Max	Тур	Max	– Min	Тур	Max	Max	Max
2V4	В	2.35	2.45	275	600	70	100	-3.5	-1.6	0	450	6.0
	С	2.2	2.6									
2V7	В	2.65	2.75	300	600	75	100	-3.5	-2.0	0	450	6.0
	С	2.5	2.9									
3V0	В	2.94	3.06	325	600	80	95	-3.5	-2.1	0	450	6.0
	С	2.8	3.2									
3V3	В	3.23	3.37	350	600	85	95	-3.5	-2.4	0	450	6.0
	С	3.1	3.5									
3V6	В	3.53	3.67	375	600	85	90	-3.5	-2.4	0	450	6.0
	С	3.4	3.8									
3V9	В	3.82	3.98	400	600	85	90	-3.5	-2.5	0	450	6.0
	С	3.7	4.1									
4V3	В	4.21	4.39	410	600	80	90	-3.5	-2.5	0	450	6.0
	С	4.0	4.6									
4V7	В	4.61	4.79	425	500	50	80	-3.5	-1.4	0.2	300	6.0
	С	4.4	5.0									
5V1	В	5.0	5.2	400	480	40	60	-2.7	-0.8	1.2	300	6.0
	С	4.8	5.4									
5V6	В	5.49	5.71	80	400	15	40	-2.0	1.2	2.5	300	6.0
	С	5.2	6.0									
6V2	В	6.08	6.32	40	150	6	10	0.4	2.3	3.7	200	6.0
	С	5.8	6.6									
6V8	В	6.66	6.94	30	80	6	15	1.2	3.0	4.5	200	6.0
	С	6.4	7.2									
7V5	В	7.35	7.65	30	80	6	15	2.5	4.0	5.3	150	4.0
	С	7.0	7.9									
8V2	В	8.04	8.36	40	80	6	15	3.2	4.6	6.2	150	4.0
	С	7.7	8.7									
9V1	В	8.92	9.28	40	100	6	15	3.8	5.5	7.0	150	3.0
	С	8.5	9.6									
10	В	9.8	10.2	50	150	8	20	4.5	6.4	8.0	90	3.0
	С	9.4	10.6									
11	В	10.8	11.2	50	150	10	20	5.4	7.4	9.0	85	2.5
	С	10.4	11.6									
12	В	11.8	12.2	50	150	10	25	6.0	8.4	10.0	85	2.5
	С	11.4	12.7									

# Table 8.Characteristics per type; BZV55-B2V4 to BZV55-C24 $T_i = 25$ °C unless otherwise specified.

BZV55\_SER

Voltage regulator diodes

BZV55- xxx	Sel	Working voltage V <sub>Z</sub> (V)		-	Differential resistance r <sub>dif</sub> (Ω)			Temp coeffi S <sub>Z</sub> (m			Diode capacitance C <sub>d</sub> (pF) <sup>[1]</sup>	Non-repetitive peak reverse current	
		l <sub>z</sub> = 5 r	mA	l <sub>Z</sub> = 1	l <sub>z</sub> = 1 mA l <sub>z</sub>		mA	l <sub>Z</sub> = 5	mA			I <sub>ZSM</sub> (A)[2]	
		Min	Max	Тур	Max	Тур	Max	Min	Тур	Max	Мах	Max	
13	В	12.7	13.3	50	170	10	30	7.0	9.4	11.0	80	2.5	
	С	12.4	14.1										
15	В	14.7	15.3	50	200	10	30	9.2	11.4	13.0	75	2.0	
	С	13.8	15.6										
16	В	15.7	16.3	50	200	10	40	10.4	12.4	14.0	75	1.5	
	С	15.3	17.1										
18	В	17.6	18.4	50	225	10	45	12.4	14.4	16.0	70	1.5	
	С	16.8	19.1										
20	В	19.6	20.4	60	225	15	55	12.3	15.6	18.0	60	1.5	
	С	18.8	21.2										
22	В	21.6	22.4	60	250	20	55	14.1	17.6	20.0	60	1.25	
	С	20.8	23.3										
24	В	23.5	24.5	60	250	25	70	15.9	19.6	22.0	55	1.25	
	С	22.8	25.6										

### **Table 8.** Characteristics per type; BZV55-B2V4 to BZV55-C24 ... continued $T_i = 25$ °C unless otherwise specified.

[1]  $f = 1 \text{ MHz}; V_R = 0 \text{ V}$ 

[2]  $t_p = 100 \ \mu s$ ; square wave;  $T_i = 25 \ ^\circ C$  prior to surge

Voltage regulator diodes

BZV55- xxx	Sel	•	Working voltage V <sub>Z</sub> (V)		rential r 2)	esistar	ice	Temp coeffi S <sub>Z</sub> (m			Diode capacitance C <sub>d</sub> (pF) <sup>[1]</sup>	Non-repetitive peak reverse current
		I <sub>Z</sub> = 2	mA	I <sub>Z</sub> = 0	.5 mA	I <sub>Z</sub> = 2	mA	I <sub>Z</sub> = 2	mA			I <sub>ZSM</sub> (A) <sup>[2]</sup>
		Min	Max	Тур	Max	Тур	Max	Min	Тур	Max	Мах	Max
27	В	26.5	27.5	65	300	25	80	18.0	22.7	25.3	50	1.0
	С	25.1	28.9									
30	В	29.4	30.6	70	300	30	80	20.6	25.7	29.4	50	1.0
	С	28.0	32.0									
33	В	32.3	33.7	75	325	35	80	23.3	28.7	33.4	45	0.9
	С	31.0	35.0									
36	В	35.3	36.7	80	350	35	90	26.0	31.8	37.4	45	0.8
	С	34.0	38.0									
39	В	38.2	39.8	80	350	40	130	28.7	34.8	41.2	45	0.7
	С	37.0	41.0									
43	В	42.1	43.9	85	375	45	150	31.4	38.8	46.6	40	0.6
	С	40.0	46.0									
47	В	46.1	47.9	85	375	50	170	35.0	42.9	51.8	40	0.5
	С	44.0	50.0									
51	В	50.0	52.0	90	400	60	180	38.6	46.9	57.2	40	0.4
	С	48.0	54.0									
56	В	54.9	57.1	100	425	70	200	42.2	52.0	63.8	40	0.3
	С	52.0	60.0									
62	В	60.8	63.2	120	450	80	215	58.8	64.4	71.6	35	0.3
	С	58.0	66.0									
68	В	66.6	69.4	150	475	90	240	65.6	71.7	79.8	35	0.25
	С	64.0	72.0									
75	В	73.5	76.5	170	500	95	255	73.4	80.2	88.6	35	0.2
	С	70.0	79.0									

#### Table 9. Characteristics per type; BZV55-B27 to BZV55-C75


[1]  $f = 1 \text{ MHz}; V_R = 0 \text{ V}$ 

[2]  $t_p = 100 \ \mu s$ ; square wave;  $T_i = 25 \ ^\circ C$  prior to surge

### **NXP Semiconductors**


## **BZV55 series**

Voltage regulator diodes

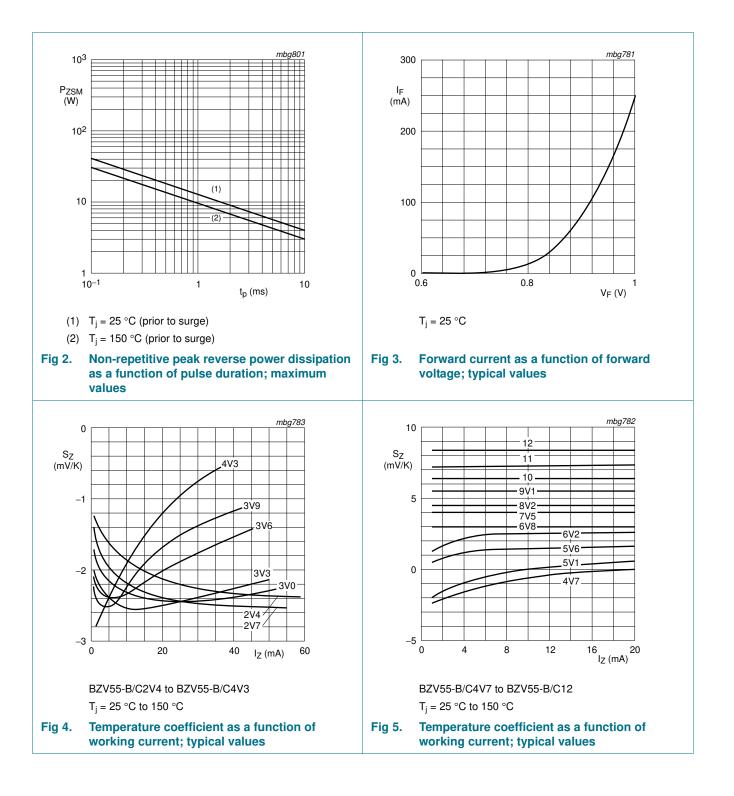

Voltage regulator diodes

### 8. Package outline

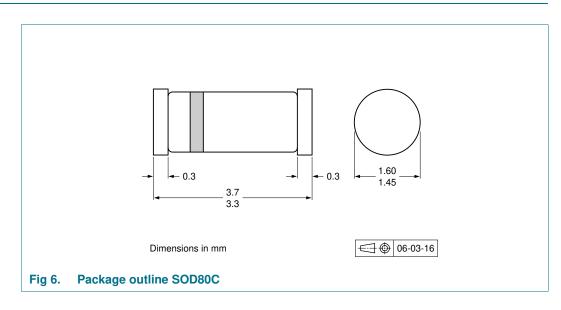

### 9. Packing information

#### Table 10. Packing methods


The indicated -xxx are the last three digits of the 12NC ordering code.[1]

Type number	Package	Description	Packing	quantity
			2500	10000
BZV55-B2V4 to BZV55-C75	SOD80C	4 mm pitch, 8 mm tape and reel	-115	-135

[1] For further information and the availability of packing methods, see Section 13.

Voltage regulator diodes

### **10. Soldering**

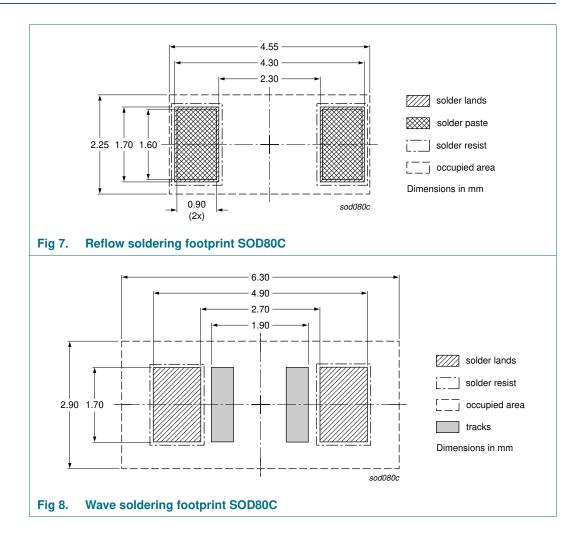

Voltage regulator diodes

### 11. Revision history

Document ID	Release date	Data sheet status	Change notice	Supersedes						
BZV55_SER v.5	20110126	Product data sheet	-	BZV55_SER v.4						
Modifications:	<ul> <li>Section 4 "M</li> </ul>	Section 4 "Marking": updated								
	<ul> <li><u>Table 6 "Thermal characteristics"</u>: changed R<sub>th(j-t)</sub> for R<sub>th(j-sp)</sub></li> </ul>									
	ne drawing									
	<ul> <li>Section 12 "L</li> </ul>	<u>_egal information"</u> : updated								
BZV55_SER v.4	20070719	Product data sheet	CPCN200508022F	BZV55 v.3						
BZV55 v.3	20020228	Product specification	-	BZV55 v.2						
BZV55 v.2	19990521	Product specification	-	BZV55 v.1						
BZV55 v.1	19960426	Product specification	-	-						

### 12. Legal information

### 12.1 Data sheet status

Document status[1][2]	Product status <sup>[3]</sup>	Definition
Objective [short] data sheet	Development	This document contains data from the objective specification for product development.
Preliminary [short] data sheet	Qualification	This document contains data from the preliminary specification.
Product [short] data sheet	Production	This document contains the product specification.

[1] Please consult the most recently issued document before initiating or completing a design.

[2] The term 'short data sheet' is explained in section "Definitions".

[3] The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the Internet at URL http://www.nxp.com.

#### 12.2 Definitions

**Draft** — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. NXP Semiconductors does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

Short data sheet — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local NXP Semiconductors sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

**Product specification** — The information and data provided in a Product data sheet shall define the specification of the product as agreed between NXP Semiconductors and its customer, unless NXP Semiconductors and customer have explicitly agreed otherwise in writing. In no event however, shall an agreement be valid in which the NXP Semiconductors product is deemed to offer functions and qualities beyond those described in the Product data sheet.

### 12.3 Disclaimers

Limited warranty and liability — Information in this document is believed to be accurate and reliable. However, NXP Semiconductors does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information.

In no event shall NXP Semiconductors be liable for any indirect, incidental, punitive, special or consequential damages (including - without limitation - lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory.

Notwithstanding any damages that customer might incur for any reason whatsoever, NXP Semiconductors' aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the *Terms and conditions of commercial sale* of NXP Semiconductors.

**Right to make changes** — NXP Semiconductors reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

Suitability for use — NXP Semiconductors products are not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or

malfunction of an NXP Semiconductors product can reasonably be expected to result in personal injury, death or severe property or environmental damage. NXP Semiconductors accepts no liability for inclusion and/or use of NXP Semiconductors products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

**Applications** — Applications that are described herein for any of these products are for illustrative purposes only. NXP Semiconductors makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Customers are responsible for the design and operation of their applications and products using NXP Semiconductors products, and NXP Semiconductors accepts no liability for any assistance with applications or customer product design. It is customer's sole responsibility to determine whether the NXP Semiconductors product is suitable and fit for the customer's applications and products planned, as well as for the planned application and use of customer's third party customer(s). Customers should provide appropriate design and operating safeguards to minimize the risks associated with their applications and products.

NXP Semiconductors does not accept any liability related to any default, damage, costs or problem which is based on any weakness or default in the customer's applications or products, or the application or use by customer's third party customer(s). Customer is responsible for doing all necessary testing for the customer's applications and products using NXP Semiconductors products in order to avoid a default of the applications and the products or of the application or use by customer's third party customer(s). NXP does not accept any liability in this respect.

Limiting values — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) will cause permanent damage to the device. Limiting values are stress ratings only and (proper) operation of the device at these or any other conditions above those given in the Recommended operating conditions section (if present) or the Characteristics sections of this document is not warranted. Constant or repeated exposure to limiting values will permanently and irreversibly affect the quality and reliability of the device.

Terms and conditions of commercial sale — NXP Semiconductors products are sold subject to the general terms and conditions of commercial sale, as published at <a href="http://www.nxp.com/profile/terms">http://www.nxp.com/profile/terms</a>, unless otherwise agreed in a valid written individual agreement. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. NXP Semiconductors hereby expressly objects to applying the customer's general terms and conditions with regard to the purchase of NXP Semiconductors products by customer.

**No offer to sell or license** — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

**Export control** — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from national authorities.

All information provided in this document is subject to legal disclaimers.

11 of 13

BZV55 SER

#### Voltage regulator diodes

**Quick reference data** — The Quick reference data is an extract of the product data given in the Limiting values and Characteristics sections of this document, and as such is not complete, exhaustive or legally binding.

**Non-automotive qualified products** — Unless this data sheet expressly states that this specific NXP Semiconductors product is automotive qualified, the product is not suitable for automotive use. It is neither qualified nor tested in accordance with automotive testing or application requirements. NXP Semiconductors accepts no liability for inclusion and/or use of non-automotive qualified products in automotive equipment or applications.

In the event that customer uses the product for design-in and use in automotive applications to automotive specifications and standards, customer (a) shall use the product without NXP Semiconductors' warranty of the

### **13. Contact information**

product for such automotive applications, use and specifications, and (b) whenever customer uses the product for automotive applications beyond NXP Semiconductors' specifications such use shall be solely at customer's own risk, and (c) customer fully indemnifies NXP Semiconductors for any liability, damages or failed product claims resulting from customer design and use of the product for automotive applications beyond NXP Semiconductors' standard warranty and NXP Semiconductors' product specifications.

### 12.4 Trademarks

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

For more information, please visit: http://www.nxp.com

For sales office addresses, please send an email to: salesaddresses@nxp.com

### 14. Contents

1	Product profile	1
1.1	General description	1
1.2	Features and benefits	1
1.3	Applications	1
1.4	Quick reference data	1
2	Pinning information	1
3	Ordering information	2
4	Marking	2
5	Limiting values	2
6	Thermal characteristics	2
7	Characteristics	3
8	Package outline	8
9	Packing information	8
10	Soldering	9
11	Revision history	10
12	Legal information	11
12.1	Data sheet status	11
12.2	Definitions	11
12.3	Disclaimers	11
12.4	Trademarks	12
13	Contact information 1	12
14	Contents 1	13

Please be aware that important notices concerning this document and the product(s) described herein, have been included in section 'Legal information'.

© NXP B.V. 2011.

All rights reserved.

For more information, please visit: http://www.nxp.com For sales office addresses, please send an email to: salesaddresses@nxp.com

Date of release: 26 January 2011 Document identifier: BZV55\_SER