



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



COOPER

Bussmann®

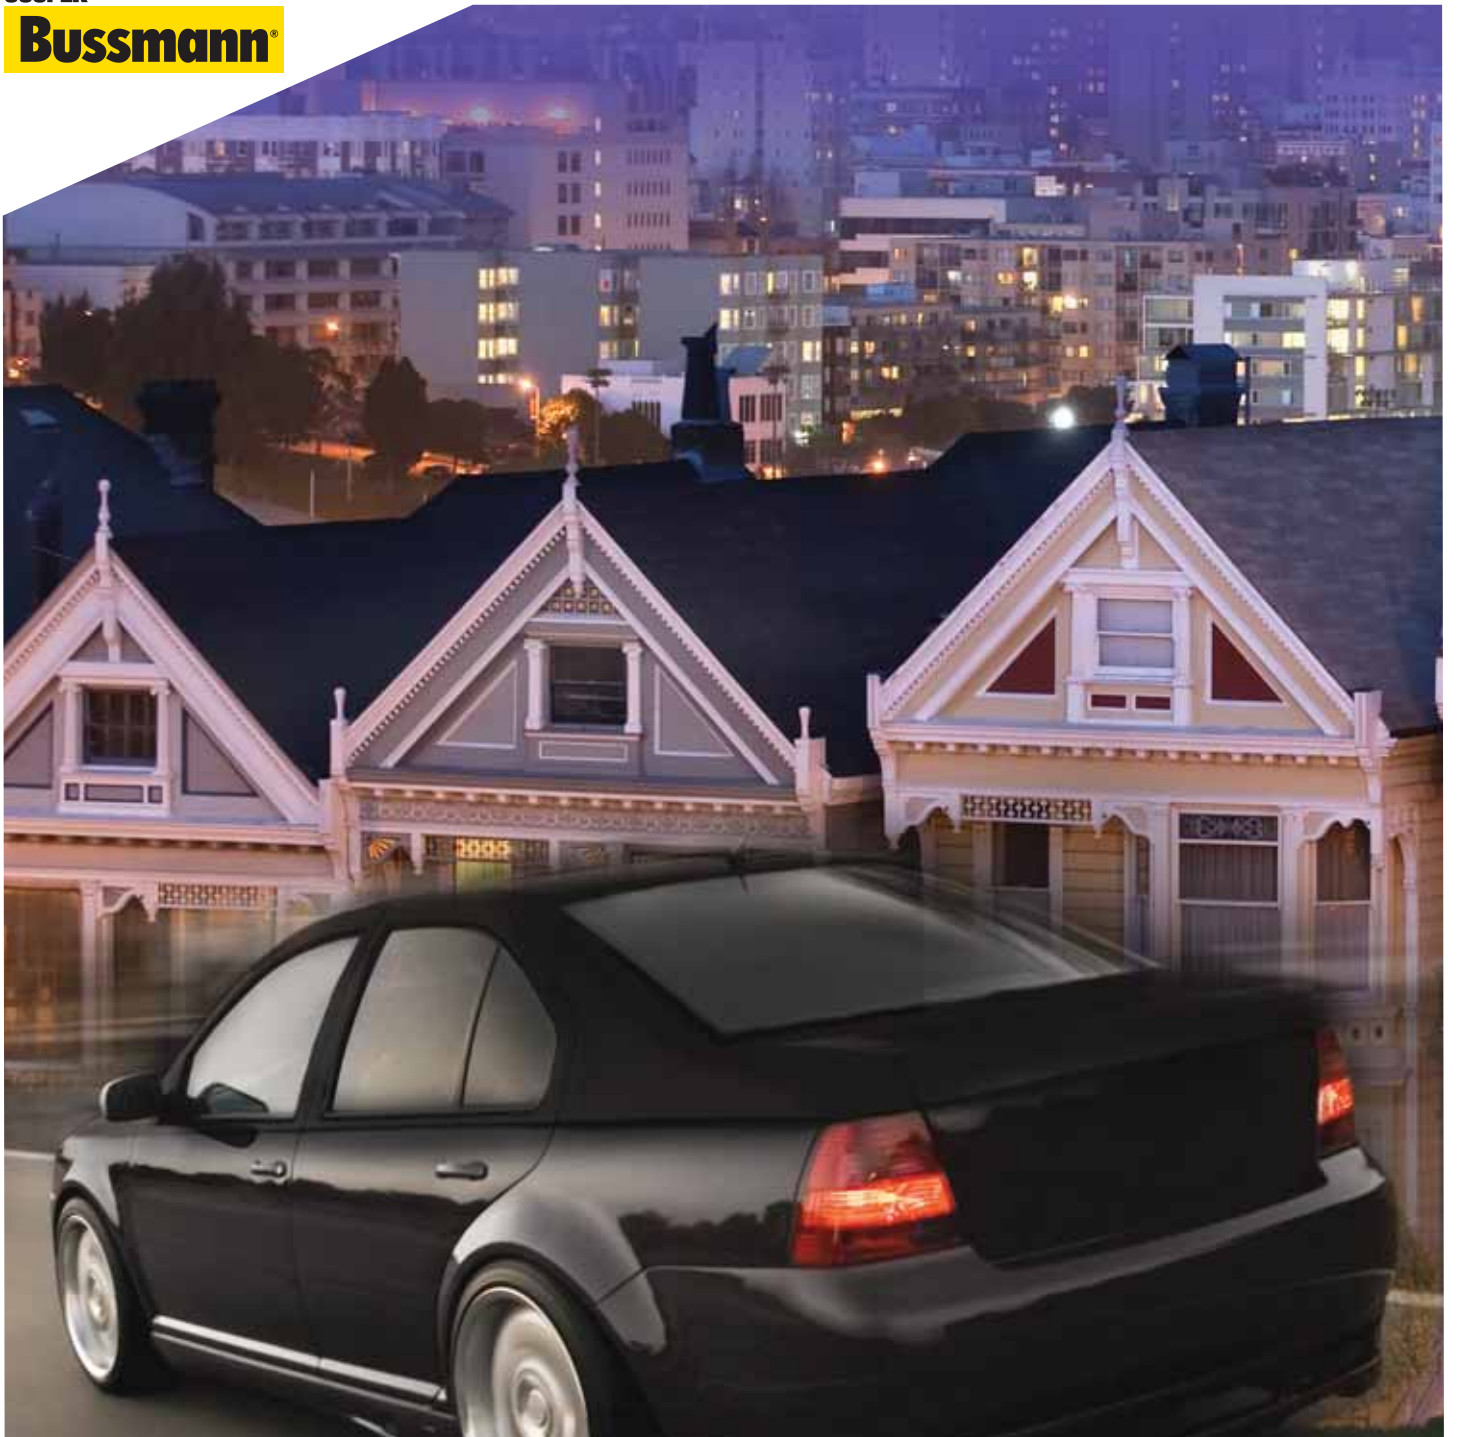

Consumer Aftermarket Product Catalog

Fuse and Circuit Breaker Specifications

COOPER Bussmann

Circuit Protection Specifications - Fuses

Type	Catalog Symbol	Class	Construction/Size	Volts	Amps	Interrupting Rating	Type	Typical Applications
Blade * easyID™ illuminating version	ATM / ATM-_ID*	-	Miniature blade fuse	32Vdc	2-30A	1kA	Fast-Acting	Automotive circuits
	ATM_LP	-	Low-profile ATM fuse	32Vdc	5-30A	1kA	Fast-Acting	Automotive circuits
	ATC / ATC-_ID*	-	Blade fuse	32Vdc	1-40A	1kA	Fast-Acting	Automotive circuits
	MAX / MAX-_ID*	-	Heavy-duty blade fuse	32Vdc	20-80A	1kA	Fast-Acting	Automotive circuits
Glass Tube	ABC	-	$\frac{1}{4}$ " x $1\frac{1}{4}$ " Ceramic	250Vac	$\frac{1}{4}$ -1A	35A	Fast-Acting	Appliances and consumer electronics
				250Vac	$\frac{1}{2}$ -3A	100A		
				250Vac	4-10A	200A		
				250Vac	12-15A	750A		
				125Vac	20A	400A		
	125Vac	25-30A	1kA					
	AGA	-	$\frac{1}{4}$ " x $\frac{5}{8}$ "	125Vac	1- $1\frac{1}{2}$ A	10kA	Fast-Acting	Automotive circuits
				125Vac	2-5A	200A		
				32Vac	6-30A	1kA		
	AGC	-	$\frac{1}{4}$ " x $1\frac{1}{4}$ "	250Vac	$\frac{1}{20}$ -1A	35A	Fast-Acting	Appliances and consumer electronics
				250Vac	$\frac{1}{4}$ -3A	100A		
				250Vac	4-10A	200A		
				32Vac	12-30A	1kA		
				32Vac	35A	70A		
	32Vac	40A	80A					
	AGU AGU-(amp)GP	Midget	Glass tube ferrule $\frac{3}{32}$ " x $1\frac{1}{2}$ "	250Vac	1-3A	10kA	Fast-Acting	Appliances and consumer electronics
				32Vac	4-60A	10kA		
	AGW	-	$\frac{1}{4}$ " x $\frac{7}{8}$ "	32Vac	1-30A	-	Fast-Acting	Automotive circuits
	AGX	-	$\frac{1}{4}$ " x 1"	250Vac	$\frac{1}{500}$ - $\frac{1}{2}$ A	35A	Fast-Acting	Automotive circuits
				250Vac	$\frac{3}{4}$ -2A	100A		
125Vac				$2\frac{1}{2}$ -5A	10kA			
125Vac				6-7A	1kA			
32Vac				8-30A	1kA			
GBB	-	$\frac{1}{4}$ " x $1\frac{1}{4}$ " Ceramic	250Vac	1-30A	200A	Fast-Acting	Appliances and consumer electronics	
			125Vac	1-15A	10kA			
GBC	-	$\frac{1}{4}$ " x $\frac{31}{32}$ "	32V	5-25A	-	Fast-Acting	German automobiles	
GDA	-	5 x 20mm Ceramic	250Vac	50mA-6.3A	1.5kA	Fast-Acting	Electronic Circuits	
GDB	-	5 x 20mm	250Vac	32mA-16A	35A	Fast-Acting	Electronic Circuits	
GDC	-	5 x 20mm	250Vac	32mA-6.3A	35A	Time-Delay	Electronic Circuits	
GMA	-	5 x 20mm	250Vac	32mA-1A	35A	Fast-Acting	Appliances and consumer electronics	
			250Vac	1.2-3A	100A			
			125Vac	3.15-6A	1kA			
			125Vac	7-10A	200A			
			125Vac	15A	150A			
GMC	-	5 x 20mm	250Vac	63mA-1A	35A	Time-Delay	Appliances and consumer electronics	
			250Vac	1.25-3.15A	100A			
			125Vac	3.5-6.3A	10kA			
			125Vac	7-10A	200A			
GMD	-	5 x 20mm	250Vac	125mA-3A	100A	Time-Delay	Electronic Circuits	
			250Vac	4A	200A			
MDA	-	$\frac{1}{4}$ " x $1\frac{1}{4}$ " Ceramic	250Vac	$\frac{1}{4}$ -1A	35A	Time-Delay	Appliances and consumer electronics	
			250Vac	$\frac{1}{2}$ -2A	100A			
			250Vac	$2\frac{1}{2}$ -10A	200A			
			250Vac	12-15A	750A			
			125Vac	20-30A	1.5kA			
MDL	-	$\frac{1}{4}$ " x $1\frac{1}{4}$ "	250Vac	$\frac{1}{16}$ -1A	35A	Time-Delay	Appliances and consumer electronics	
			250Vac	$\frac{1}{4}$ -3A	100A			
			250Vac	4-8A	200A			
			32Vac	9-30A	1kA			
MDQ	-	$\frac{1}{4}$ " x $1\frac{1}{4}$ "	250Vac	$\frac{1}{16}$ -1A	35A	Time-Delay	Electronic Relay and Controls	
			250Vac	$\frac{1}{4}$ -3A	100A			
			250Vac	4-7A	200A			
			32Vac	8-30A	1kA			
SFE	-	$\frac{1}{4}$ " x various length	32V	4-30A	-	Fast-Acting	Size-Rejecting for automotive circuits	

Circuit Protection Specifications - Fuses

Type	Catalog Symbol	Class	Construction/Size	Volts	Amps	Interrupting Rating	Type	Typical Applications	
Heavy-Duty	AMG	-	Bolt-in fuse	32Vdc	100-300A	1kA		Automotive circuits, uses HMEG fuse block	
	AMI	-	Bolt-in fuse	32Vdc	50-100A	2kA		Automotive circuits, uses HMID fuse block	
	CBBF	-	Bolt-in	58Vdc	30-300A	2kA	-	Heavy-Duty and Marine	
	* easyID™ illuminating version	FMX, FMX_ID* Female Maxi	-	6mm blade on 5.5mm centers	32Vdc	20-60A	1kA	Time-Delay	Automotive circuits
	FMX_LP Low-Profile FMX Fuse	-	Low-profile, 6mm blade on 5.5mm centers	58Vdc	20-60A	1kA @ 32Vdc	Time-Delay	Automotive circuits	
Current Limiters	ANN	-	Bolt-in fuse 2.44mm blade centers	125Vac/ 80Vdc	10 to 800A	2.5kA - ac 2.7kA - dc	Very Fast-Acting	Automotive circuits, fork lift trucks, marine, aviation	
	ANL	-	Bolt-in fuse 2.44mm blade centers	32Vac/ 80Vdc	35 to 750A	6kA - ac 2.7kA - dc	Non Time-Delay	Automotive circuits, fork lift trucks, marine, aviation	
Fusible Links	FLB	-	Bolt-mount	32Vdc	30-140A	10kA	-	Automotive circuits	
	FLD	-	Bolt-mount	32Vdc	30-104A	10kA	-		
	FLF	-	Female terminals	32Vdc	20-60A	10kA	-		
	FLM	-	Male terminals	32Vdc	30-120A	10kA	-		
	FLN	-	Fem. terms. w/ lock tab	32Vdc	25-30A	10kA	-		
	FLS	-	Fem. mini terminals	32Vdc	30-40A	10kA	-		
Plug	TL	-	Edison Thread Base	125Vac	15-30A	10kA	Time-Delay	Panels, small motors and inductive loads	
	T	-	Edison Thread Base	125Vac	³ / ₁₀ -30A	10kA	Heavy-Duty Time-Delay	Panels, small motors and inductive loads	
	TC	CSA Type D	Edison Thread Base	125Vac	15-30A	-	Dual-Element Time-Delay	Canadian applications: Panels, small motors and inductive loads	
	P	CSA Type P	Edison Thread Base	125Vac	15-30A	-	General Purpose	Canadian applications: Panels, small motors and inductive loads	
	SL	-	Rejection Thread Base	125Vac	15-30A	10kA	Time-Delay	Panels, small motors and inductive loads	
	S	-	Rejection Thread Base	125Vac	¹ / ₄ -30A	10kA	Heavy-Duty Time-Delay	Panels, small motors and inductive loads	
Cartridge	NON	K5 & H	Ferrule Style	250Vac	¹ / ₈ -60A	50kA	General Purpose	Light duty circuits	
			Blade Style	250Vac	65-600A	10kA			
	PON	CSA Type P	Ferrule Style	250Vac	1-60A	10kA	General Purpose	Canadian applications: Light duty circuits	
			Blade Style	250Vac	70-600A	10kA			
	CDN	CSA Type D	Ferrule Style	250Vac	1-60A	10kA	Gen. Purpose Time-Delay	Canadian applications: Light duty circuits	
			Blade Style	250Vac	70-600A	10kA			
	NOS	K5 & H	Ferrule Style	600Vac	1-60A	50kA	General Purpose	Light duty circuits	
			Blade Style	600Vac	70-600A	10kA			
	FRN-R FRN-R_ID**	RK5	Ferrule Style	250Vac	¹ / ₁₀ -60A	200kA	Time-Delay	Panelboards, motor control centers, machinery disconnects and combination starters	
			Blade Style	250Vac	70-600A	200kA			
	FRS-R	RK5	Ferrule Style	600Vac	¹ / ₁₀ -60A	200kA	Time-Delay	Panelboards, motor control centers, machinery disconnects and combination starters	
			Blade Style	600Vac	65-600A	200kA			
SC	G	¹³ / ₃₂ " x ¹ / ₁₆ " Ferrule	600Vac	1-6A	100kA	Fast-Acting	Fusible branch panelboards, HVAC		
		¹³ / ₃₂ " x ¹ / ₈ " Ferrule	600Vac	7-15A	100kA	Time-Delay			
		¹³ / ₃₂ " x ¹ / ₃₂ " Ferrule	600Vac	20A	100kA				
		¹³ / ₃₂ " x ¹ / ₈ " Ferrule	480Vac	25-30A	100kA				
		¹³ / ₃₂ " x ² / ₄ " Ferrule	480Vac	35-60A	100kA				
BAF	Midget	¹³ / ₃₂ " x ¹ / ₂ " Ferrule	250Vac	² / ₁₀ -1A	35A	Fast-Acting	125 and 250Vac non-inductive load circuits		
			250Vac	1 ¹ / ₂ -2 ¹ / ₂ A	100A				
			250Vac	3-9A	200A				
			250Vac	10-15A	750A				
			125Vac	20-30A	10kA				

Circuit Protection Specifications - Fuses

Type	Catalog Symbol	Class	Construction/Size	Volts	Amps	Interrupting Rating	Type	Typical Applications
Cartridge	FNM	Midget	¹³ / ₃₂ " x 1 1/2" Ferrule	250Vac	1/10-1A	35A	Time-Delay	General purpose & lighting circuits
				250Vac	1 1/8-3 1/2A	100A		
				250Vac	4-10A	200A		
				125Vac	12-30A	10kA		
	FNQ	Midget	¹³ / ₃₂ " x 1 1/2" Ferrule	500Vac	1/10-30A	10kA	Time-Delay	480V Control transformer circuits, lighting circuits
FNQ-R	CC	¹³ / ₃₂ " x 1 1/2" Ferrule	600Vac	1/4-30A	200kA	Time-Delay	Industrial and transformer control and specialized circuits	
KTK	Midget	¹³ / ₃₂ " x 1 1/2" Ferrule	600Vac	1/10-30A	100kA	Fast-Acting	Control and meter circuits	
KTK-R	CC	¹³ / ₃₂ " x 1 1/2" Ferrule	600Vac	1/10-30A	200kA	Fast-Acting	Industrial control circuits	

Circuit Protection Specifications - Circuit Breakers

Size/Type/ Footprint	Catalog Symbol	SAE Type	Construction/Size	Volts	Amps	Interrupting Rating	Reset Type	Typical Applications
ATM	CB211	I	ATM Footprint	14Vdc	7.5-30A	150A	Automatic	Automotive/RV
	CB212	II	ATM Footprint	14Vdc	10-30A	150A	Modified	Automotive/RV
	MMB	I	ATM Footprint	12Vdc	15-20A	300A	Automatic	Automotive/RV
ATC	ACB	I	ATC Footprint	-	-	-	Automatic	Automotive/RV
	CB221	I	ATC Footprint	14Vdc	7.5-30A	150A	Automatic	Automotive/RV
	CB222	II	ATC Footprint	12Vdc	10-30A	150A	Modified	Automotive/RV
	CB223	III	ATC Footprint	28Vdc	7.5-30A	150A	Manual	Automotive/RV
	CB227	III	ATC Footprint	28Vdc	5-30A	2kA	Manual	Automotive/RV
	CCB-25	I	ATC Footprint	-	25A	-	Automatic	Automotive/RV
	CBB-30	II	ATC Footprint	24Vdc	30A	-	Modified	Automotive/RV
	FCB-20	II	ATC Footprint	14.5Vdc	20A	-	Modified	Automotive/RV
	UCB	I	ATC Footprint	12Vdc	6-30A	-	Automatic	Automotive/RV
Maxi	CB1911	I	MAX Footprint	14Vdc	10-50A	150A*	Automatic	Automotive/RV/Marine
	CB1921	II	MAX Footprint	12Vdc	10-30A	150A	Modified	Automotive/RV/Marine
Glass Tube	CBF	II	1/4" x 1 1/4"	-	6-40A	-	Modified	Automotive/RV/Marine
Stud Mount	CB123-(amp)B	III	10-32 Studs 0.69" Ctrs	28Vdc	10-50A	1.5kA**	Manual	RV/Truck/Marine
	CB123-(amp)HB	III	10-32 Studs 0.69" Ctrs	28Vdc	10-50A	1.5kA**	Manual	RV/Truck/Marine
	CBC	I	10-32 Studs 0.69" Ctrs	14Vdc	8-50A	1.5kA	Automatic	RV/Truck/Marine
	CBC-(amp)B	I	10-32 Studs 0.69" Ctrs	14Vdc	8-50A	1.5kA	Automatic	RV/Truck/Marine
	CBC-(amp)BWP	I	10-32 Studs 0.69" Ctrs	12Vdc	20-30A	1.5kA	Automatic	RV/Truck/Marine
	CBC-(amp)HB	I	10-32 Studs 0.69" Ctrs	14Vdc	10-50A	1.5kA	Automatic	RV/Truck/Marine
	CBP-(amp)BA	I	10-32 Studs 0.69" Ctrs	14Vdc	10-50A	1.5kA	Automatic	RV/Truck/Marine
Panel Mount	CB174	III	1/4" QC Terminals	250Vac/32Vdc	8-30A	200A	Manual	Automotive/Truck
	CB174B	III	5-32 Screw Terminals.	250Vac/32Vdc	10-40A	200A	Manual	Automotive/Truck
Quick Connect	CBT-(amp)M	II	1/4" QC Terminals	-	10-30A	-	Modified	RV/Truck/Marine
	CBT-(amp)N	II	1/4" QC Terminals	-	10-30A	-	Modified	RV/Truck/Marine
	CBU-6	I	1/4" QC Terminals	-	6A	-	Automatic	RV/Truck/Marine
	CBU-30B	I	1/4" QC Terminals	-	30A	-	Automatic	RV/Truck/Marine
High Amp	CB181P	I	Weatherproof, Panel-Mt.	30Vdc	60-150A	3kA	Automatic	RV/Truck/Marine
	CB184F	III	Surface-Mt. 1/4"-35 Stud	48Vdc	25-150A	3kA	Manual	RV/Truck/Marine
	CB185	III	Surface-Mt. 1/4"-35 Stud	48Vdc	25-150A	3kA	Manual	RV/Truck/Marine
	CB185P	III	Panel-Mt. 1/4"-35 Stud	48Vdc	25-150A	3kA	Manual	RV/Truck/Marine
	CB187F	III	Surface-Mt. 5/16"-18 Stud	48Vdc	25-150A	5kA**	Manual	RV/Truck/Marine
	CB187P	III	Panel-Mt. 5/16"-18 Stud	48Vdc	25-150A	5kA**	Manual	RV/Truck/Marine
	CB251	I	Weatherproof, Panel-Mt.	32Vdc	10-50A	2.5kA	Automatic	RV/Truck/Marine
	CB254	III	Weatherproof, Panel-Mt.	32Vdc	10-50A	2.5kA	Manual	RV/Truck/Marine
	CB255	III	Weatherproof, Panel-Mt.	32Vdc	10-50A	2.5kA	Manual	RV/Truck/Marine
Plug Fuse	MB	-	Edison base plug thread	125Vac	15-20A	-	Manual	Residential fuse panels

* Changes with amp range. ** @ 12Vdc.