

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



### Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China







## **Table of Specifications**



### **Midi-Contactors**



Frame size				
Туре				
Terminal type				
Number of pole	S			
Rated operation	nal voltage	e, Ue		
Rated insulation	n voltage,	Ui		
Rated frequency	y			
Rated impulse v	withstand '	voltage, Uimp		
Maximum operating		ating cycles per hour(A	C3)	
Durability	Mechani			
	Electrica			
Current		AC-1, Thermal current A		
and	AC-3	200/240V	kW	
power			Α	
		380/440V	kW	
			Α	
		500/550V	kW	
			Α	
		690V	kW	
			Α	
UL rating		ous current	Α	
(50/60Hz)	Single	110~120V	HP	
	phase	220~240V	HP	
		200~208V	HP	
	Three	220~240V	HP	
	phase	440~480V	HP	
	NIENAA	550~600V	HP	
0'		size		
Size	AC	Weight	kg	
and	control	Size(W $\times$ H $\times$ D)	mm	
weight	DC	Weight	kg	
Austilian (ats a de	control	Size(W $\times$ H $\times$ D)	mm	
Auxiliary(standa	ıra)			

	22	AF	
CC9	CC12	CC18	CC22
	Screv	/ Only	
	3p	ole	
		VOV	
		0V	
		60Hz	
	6	kV	
		ions per hour	
		perations	
		perations	
25	25	32	40
2.5	3.5	4.5	5.5
11	13	18	22
4	5.5	7.5	11
9	12	18	22
4	7.5	7.5	15
7	12	13	20
4	7.5	7.5	15
6	9	9	18
25	25	40	40
0.5	0.75	1	2
1.5	2	3	3
2	3	5	7.5
3	5	7.5	10
5	7.5	10	15
7.5	10	15	20
00	00	0	1
	0.	34	
		3.5×86	
		51 5×117.7	
		A2, GUA4	
		UA-1	
	GUA-2	, GUA-4	

40	AF
CC32	CC40
Scre	w Only
3p	ole
69	VOV
100	VOC
50/6	60Hz
8	kV
1800 operati	ons per hour
12 mil. o	perations
2 mil. op	erations
50	60
7.5	11
32	40
15	18.5
32	40
18.5	22
28	32
18.5	22
20	23
50	60
2	3
5	7.5
7.5	15
10	15
20	30
25	30
1	1
	55
	33×93
	77
69×8	3×120
	UA-1
GUA-2,	GUA-4


Note) Minimum conduct current of Auxiliary contactor is DC 17V 5mA.

Side mount

Front mount

### GT Type Thermal Overload Relays

Auxiliary





GT32
•
690V
690V
6kV
10A, 20
0.1~40A
0.17
45×75×90




GT32
•
690V
690V
6kV
10A, 20
0.1~40A
0.17
45×75×90

# **Table of Specifications**





65AF		
CC50	CC65	
Screw	or Lug	
3p	ole	
690V		
100	00V	
	60Hz	
8	۲V	
1800 operations per hour		
	perations	
2 mil. op		
70	100	
15	18.5	
55	65	
22	30	
50	65	
30	33	
43	60	
30	33	
28 35		
70	100	
3	5	
10	15	
20	25	
25	30	
40	50	
50	60	
2	2	
	05	
	6×122	
1	.3	





GT63
•
690V
690V
6kV
10A, 20
4~65A
0.31/0.33
55×81×100



	100AF	
CC75	CC85	CC100
	Screw or Lug	
	3pole	
	690V	
	1000V	
	50/60Hz	
	8kV	
-	800 operations per ho	our
	12 mil. operations	
	2 mil. operations	
110	135	160
22	25	30
75	85	105
37	45	55
75	85	105
37	45	55
64	75	85
37	45	45
42	45	65
110	135	160
5	7.5	10
15	15	20
25	30	30
30	40	40
50	60	75
60	75	75
2	3	3
	1.93	
	94×140×137	
	2.8	
	94×140×174	
	GUA-1	
	GUA-2, GUA-4	



GT95
•
690V
690V
6kV
10A, 20
7~100A
0.48/0.5
70×97×110

# **Table of Specifications**








	00/00112	
	8kV	
	1200 operations per hour	•
5 mil. op	5 mil. operations 2.5 mil. operatio	
1 mil. op	perations	0.5 mil. operations
300	350	450
80	90	125
265	330	400
147	160	200
265	330	400
147	160	225
225	280	350
160	200	250
185	225	300
300	350	450
=	-	-
-	-	-
75	100	125
100	125	150
200	250	300
200	250	300
5	5	5

9.2 163×243×198

2a2b

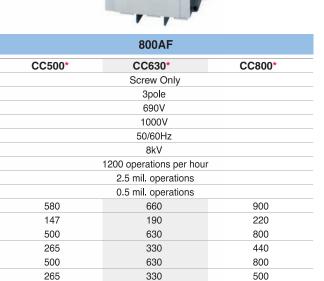

22.4 285×312×242

2a2b




GT400
•
690V
690V
6kV
10A, 20
85~400A
2.6
151×171×198



GT800
•
690V
690V
6kV
10A, 20
200~800A
11.5
360×530×212

### **Type Numbering System**



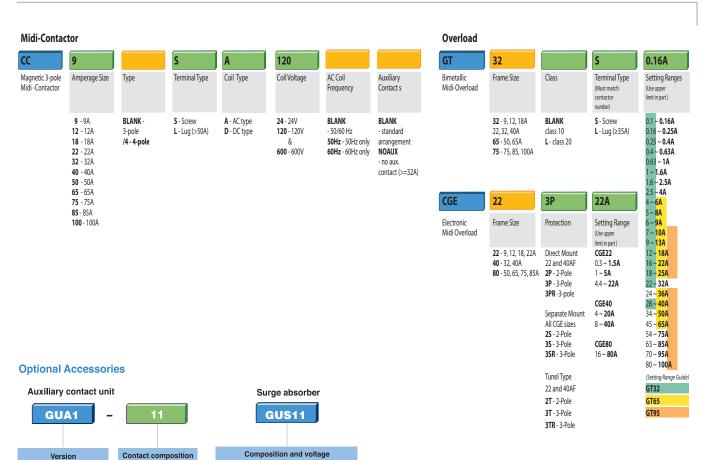

Varistor+RC

Varistor+RC

Varistor+RC

2

3

AC/DC 24~48V


AC/DC 100~125V

AC/DC 200~240V

AC 380~440V

DC 200~220V

AC 100~125V

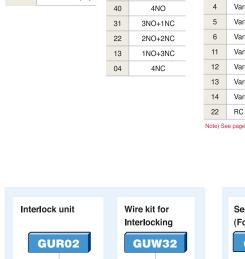

11

20

02

1NO+1NC

2NO

2NC

Frame size

63

95

22AF

32AF

GUA1

GUA2

GUA4


02

2NC

Side mount

Front mount(2P)

Front mount(4P)



## **Environment / Connections**









#### **Environment**

Standards	IEC/EN 60947-1, IEC/EN 60947-4-1, UL508, K60947
Certifications	CE, UL
Rated insulation voltage (Ui)	1000V
Rated impulse withstand voltage (Uimp)	8kV
Degree of protection	IP20 (Conforming to IEC60529)
Ambient air temperature	Storage: -50° C ~ +80° C
	Operation: -5° C ~ +60° C
Operating altitude	3000m (8900ft)
Operating positions	
Shock resistance	Opened: 8G
(1/2 sine wave =11ms)	Closed: 10G
Vibration resistance (Conforming to IEC68-2-6)	Opened: 2G
(5300 Hz)	Closed: 4G
Flame resistance	Conforming to UL 94: Vo
	Conforming to IEC 695-2-1: 960° C

#### Connections

Wire	e type	Main Terminal Size								Tor	que
Frame					(AWG / mm²)				mm(max)	[lb-in]	[Nm]
CC9			18~10 / 1~	6	18~10	/ 1~6	18~10	/ 1~6			
CC12	n/A		18~10 / 1~6		16~10 / 1~6		16~10 / 1~6		0.0	20	
CC18		M4	18~10 / 1~6		16~8 / 1.5~10		16~8 / 1.5~10		9.6		2.25
CC22			18~10 / 1~	6	14~8 / 2.5~10		14~8 / 2.5~10				
CC32	n/L		18~10 / 1~	12~8 / 2.5~10		12~8 / 2.5~10			20	2.25	
CC40		M5	18~10 / 1~	6	8~6 /	10~16	8~6 /	10~16	12.8	35	4
CC50	а		-		10~4 /	6~25	10~4	6~25		0.5	4
CC65		M6	M6 -		8~3 / 10~35		8~3 / 10~35		14	35	4
CC75			-		8~2 /	10~35	8~2 /	10~35			
CC85	811	M8	M8 -		8~1/0 / 10~50 8~1/0		8~1/0 /	10~50	17	45	5.1
CC100			-		8~2/0 /	10~70	8~2/0 /	10~70			
CC130	<b>B</b>	M8	-		3~2/0 /	35~70	3~2/0 /	35~70	0.4.5	80	9,1
CC150	ΗΨ		-		3~4/0 /	35~95	3~4/0 /	35~95	24.5		
CC9~150	œÐ	M4	20~14 / 0.5~	2.5	18~12/0	0.75~2.5	18~12 / 0.75~2.5		7.6	15	1.75
CC185	E01—		-		1~4/0 /	50~95	1~4/0 /	50~95	0.5	130	14.7
CC225		M10	-		1/0~300	/ 50~150	1/0~300	/ 50~150	25		
CC265			-		3/0~500	/ 95~240	3/0~500	/ 95~240			
CC330	61Þ	M12	-		4/0~500	/ 95~240	4/0~500	/ 95~240	30	200	22.6
CC400			-		350~700 / 1	85~185×2	350~700 / 1	85~185×2			
CC500	g Þ	M16	-		350~800 / 1	85~240×2	350~800 / 1	85~240×2		500	26.5
CC630			-		600~	2000			40		
CC800			-		1700~E	Busbar					
CC185~800	<b>%</b>	a Mafa:	shleet @/ntd25p	o <del>e</del> €if	y prophyc	te3,5√fsft v	www.1Ga	vazzFOnl	<i>ine.</i> ₹om	15	1.75

## **Control Coil Charactoristics**













Frar	ne size		22AF	40AF	65AF	100AF	150AF
Туре			CC9 CC12 CC12 CC22	CC32 CC40	CC50 CC65	CC75 CC85 CC100	CC130 CC150
AC coil							
Control voltage	50Hz 60Hz 50/60Hz	[Uc] [V] [V]	24, 48, 100, 110, 1	20, 200, 208, 220, 2	30, 240, 380, 400, 41 30, 240, 277, 380, 44 40, 380, 415, 440, 50	10, 480, 600V	24, 48, 110, 220, 300, 400, 500
Voltage limit	Pick-up Drop-out	[Uc]		85 ~110° 85 ~110°	% (50Hz) % (60Hz) 60%		
Coil consumptio							
AC 220V	Inrush	[VA]	58/56	53/50	110/104	229/216	108/104
50/60Hz	Holding	[VA]	9.0/6.0	12.0/9.0	13.0/10.0	17.0/13.0	18.0/21.0
Heat dissipation		[W]	2.1/1.5	2.7/2.2	2.8/2.4	5.4/4.7	2.7/3.6
Operating time	Closing	[ms]	12 22 4 19	12 22 4 19	12 22 4 19	15 30 10 30	20 40 60 70
DC coil							
Control voltage Voltage limit	Pick-up	[Uc]	12, 20, 24, 48, 60	, 80, 100, 110, 125, 70 ~	200, 220, 250		24, 48, 110, 220
	Drop-out			10 ~	30%		
Coil consumptio	n at 20°C						
DC 110V	Inrush	[W]	9	7	9	18	213
	Holding	[W]	9	7	9	18	7.5
Time constant (I	_/R)	[ms]	28	28	65	75	
Operating time	Closing Opening	[ms]	35 50 4 19	50 65 4 19	50 65 4 19	100 120 10 25	70 80 60 70



Note) A1(A2) in line side is internally connected to A1(A2) in load side.

## **Control Coil Charactoristics**










Fra	ame size		225AF	400AF	800AF	
Туре			CC185 CC225	CC265 CC330 CC400	CC500 CC630 CC800	
AC/DC comm	on coil					
Control voltage	e AC/DC	[Uc]	24/24	-	-	
	AC/DC		48/48	-	100/100	
	AC/DC		100~240/100~220	100~240/100~220	200/200	
	AC		300	300	300	
	AC		400	400	400	
	AC		500	500	500	
Voltage limit	Pick-up Drop-out	[Uc]		86~110% 30~60%		
Coil consumpt						
AC 220V	Inrush	[VA]	380	571	1000	
50/60Hz	Holding	[VA]	11.6	14	29	
Heat dissipation	on	[W]	4.7	5	7.8	
Operating time	)					
	Closing	[ms]	70	55	75	
	Opening	[ms]	70	55	75	

### **Internal Structure**



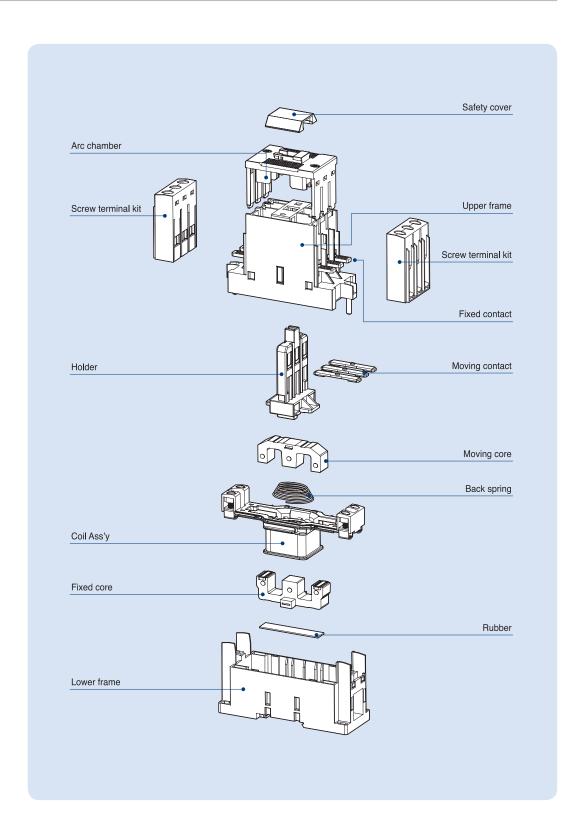

## **Contactors (150AF)**



### **Description**

- 3-pole(NO) main contact
- Finger proof design
- DIN rail or screw mountable
- AC or DC control in the same physical size
- Front/side mountable accessories available
- Direct mountable overload relay available
- 2NO2NC Auxiliary contacts built-in as standard

#### **Rating**



CC150

Contactor type			C	C130	CC150		
Contactor type			kW	Α	kW	Α	
AC duty	AC3	200/240V	37	130	45	150	
		380/440V	60	130	75	150	
		500/550V	60	90	70	100	
		690V	55	60	55	60	
	AC4	200/240V	22	93	30	120	
		380/440V	45	90	55	110	
	AC1		-	160	-	210	
DC1 duty	2-pole	24V	-	120	-	150	
(L/R=1ms)	in series	48V	-	100	-	120	
		110V	-	80	-	100	
	3-pole	24V	-	120	-	150	
	in series	48V	-	120	-	150	
		110V	-	100	-	150	
DC2, 4 duty	2-pole	24V	-	120	-	150	
(L/R=15ms)	in series	48V	-	60	-	100	
		110V	-	40	-	80	
	3-pole	24V	-	120	-	150	
	in series	48V	-	90	-	130	
		110V	-	80	-	120	
Directly mountable Overload relay		GT150					
Conductor size (so	Conductor size (solid, stranded) AWG		3	~00	3~00		
(the max. number of	of conducts: 2)	mm <sup>2</sup>	35	5~70	35~95		
Conductor type			65/75℃ Cu-wire only				



AC	50/60Hz	24, 48, 110, 220, 300, 400, 500V
DC	DC	24, 48, 110, 220V

Certification


• CE(IEC)

• UL508

## **Contactors (150AF)**




### **Accessories**

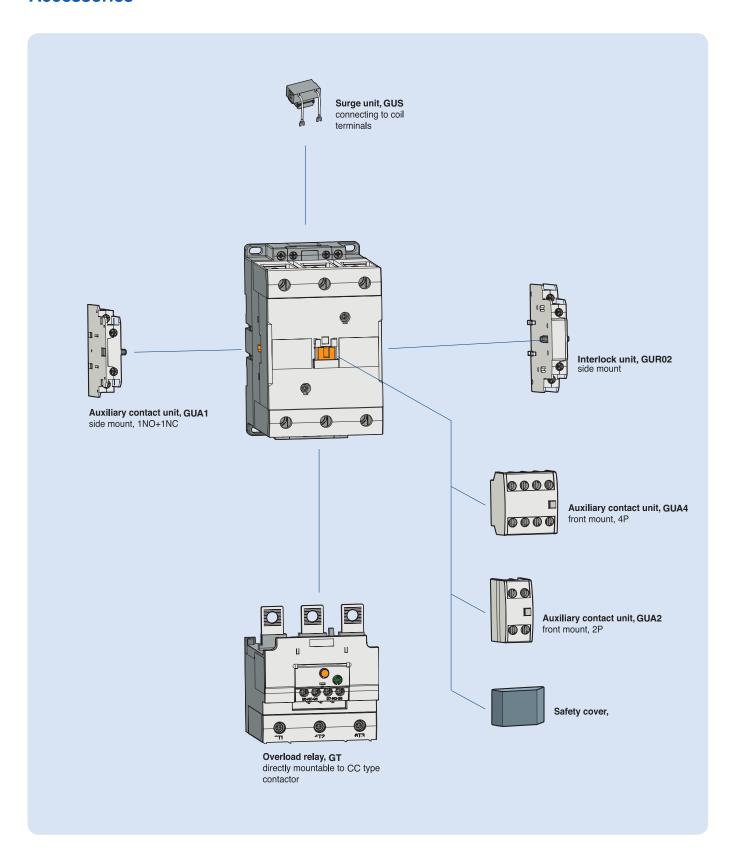

## Contactors (150AF ~ 800AF)



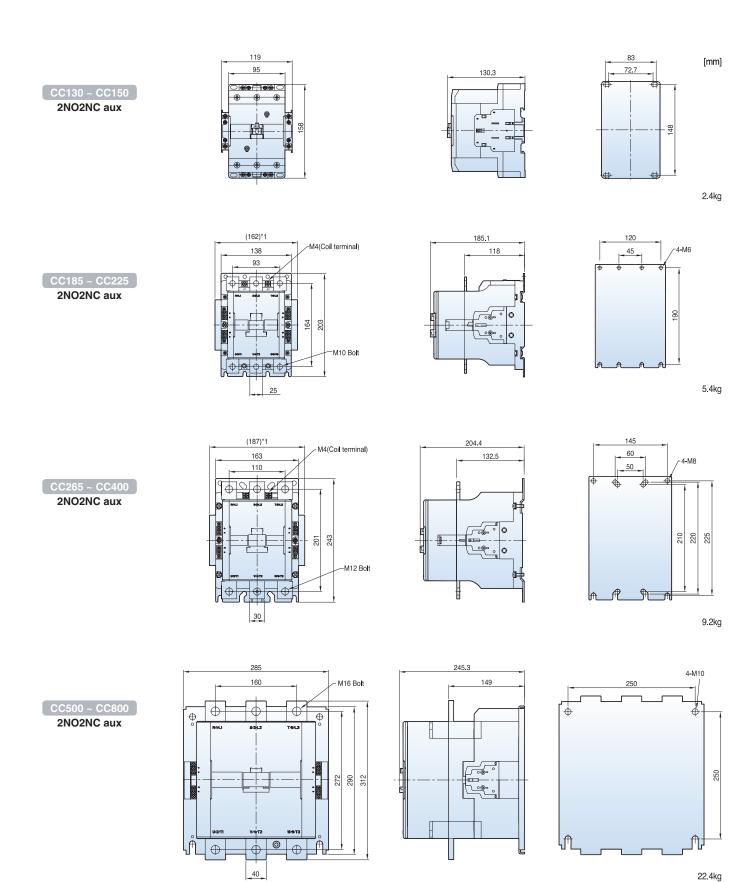



## **Motor Starters (65AF ~ 150AF)**




CC50 ~ CC65 with GT63


shown with no aux contact

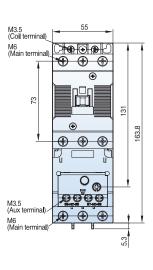


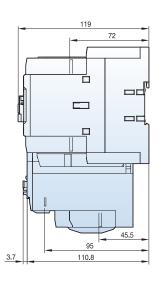


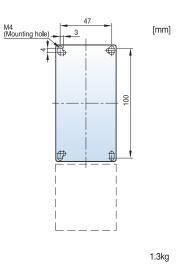


cc75 ~ cc100 with GT95 shown with no aux contact

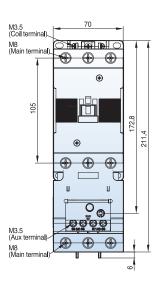


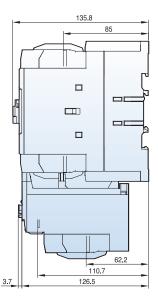

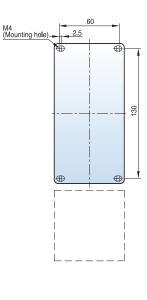

cc130 ~ cc150 with GT150 shown with no aux contact



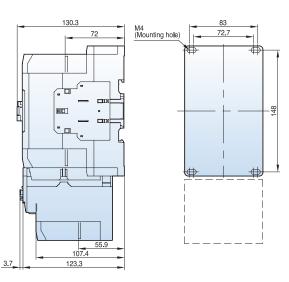


2.9kg

2.3kg

## **Reversing Contactors and Starters (150AF ~ 800AF)**



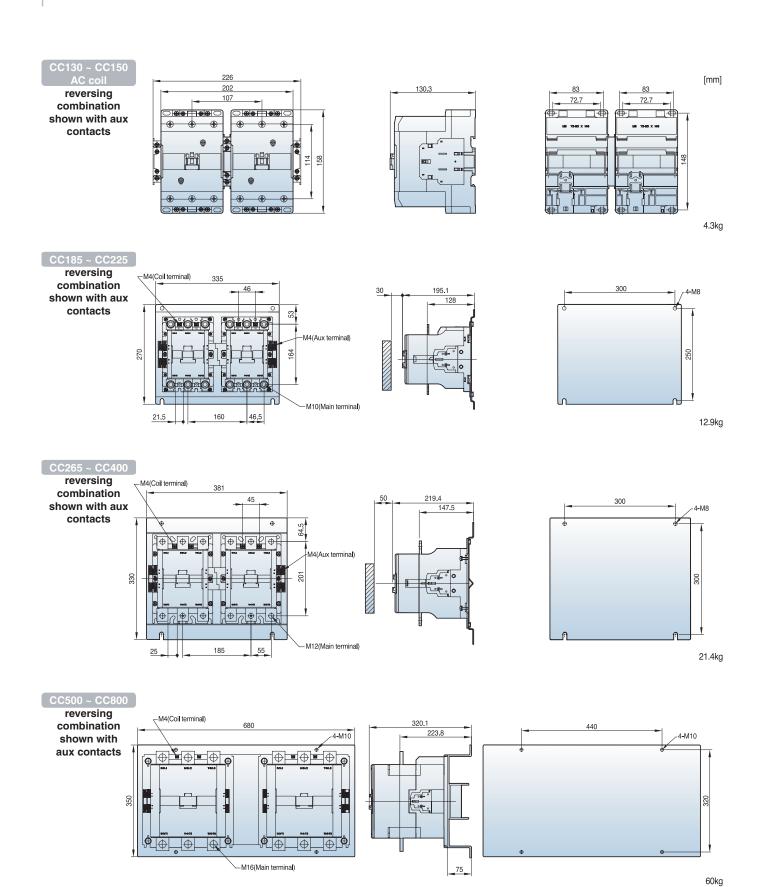



## **Reversing Contactors and Starters (150AF ~ 400AF)**



CC130 ~ CC150

reversing combination shown with GT150 and aux contacts







5kg


[mm]

CC185 ~ CC225

reversing combination shown with GT225 and aux contacts









CC265 ~ CC400

reversing combination shown with GT400 and aux contacts

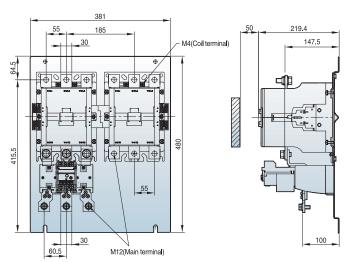

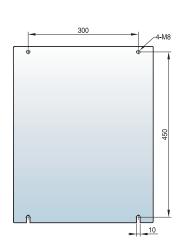

23kg