



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



DETAILS

Product Number	CC15000_FLORENTINA-M
Family	Florentina
Type	Assembly
Color	black
Diameter	28,81x286,8 mm
Height	25,1 mm
Style	rectang
Optic Material	
Holder Material	
Fastening	screw
Status	production ready
ROHS Compliant	Yes
Date Updated	20/09/2016







OPTICAL PROPERTIES

LED	Viewing	Light	Effi-	cd/lm	Connector
	Angle	Beam	ciency		
XP-E2	29 deg	Medium	81 %	3.280	-
XP-G2	29 deg	Medium	82 %	2.900	-
H35C1 (LEMWA33)	28 deg	Medium	79 %	2.830	-
LUXEON Rebel Plus	26 deg	Medium	80 %	3.300	-
LUXEON TX	28 deg	Medium	79 %	3.000	-
LUXEON Rebel ES	28 deg	Medium	78 %	2.800	-
LUXEON Z ES	26 deg	Medium	81 %	3.500	-
NCSxx19B	28 deg	Medium	79 %	2.900	-
NVSxx19B/NVSxx19C	29 deg	Medium	77 %	2.600	-
Oslon SSL 80	26 deg	Medium	76 %	2.930	-
Oslon Square EC	28 deg	Medium	78 %	2.900	-
Oslon SSL 150	28 deg	Medium	80 %	3.300	-
LH351B	28 deg	Medium	79 %	2.770	-
TL1L4	27 deg	Medium	76 %	2.840	-

11x23.833=262.16

Led middle position

Isometric view (1:2)

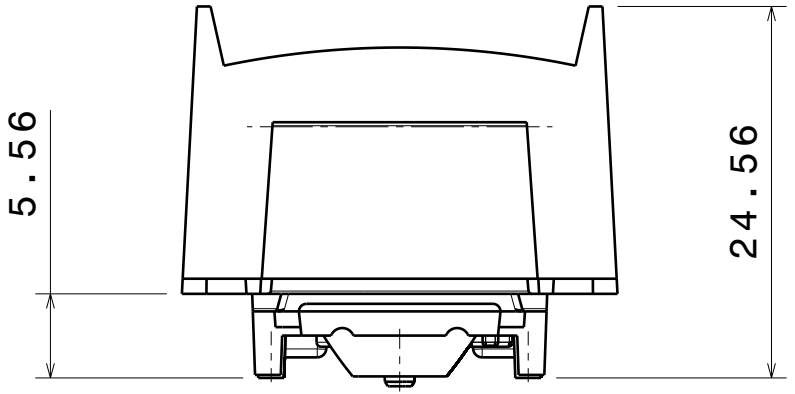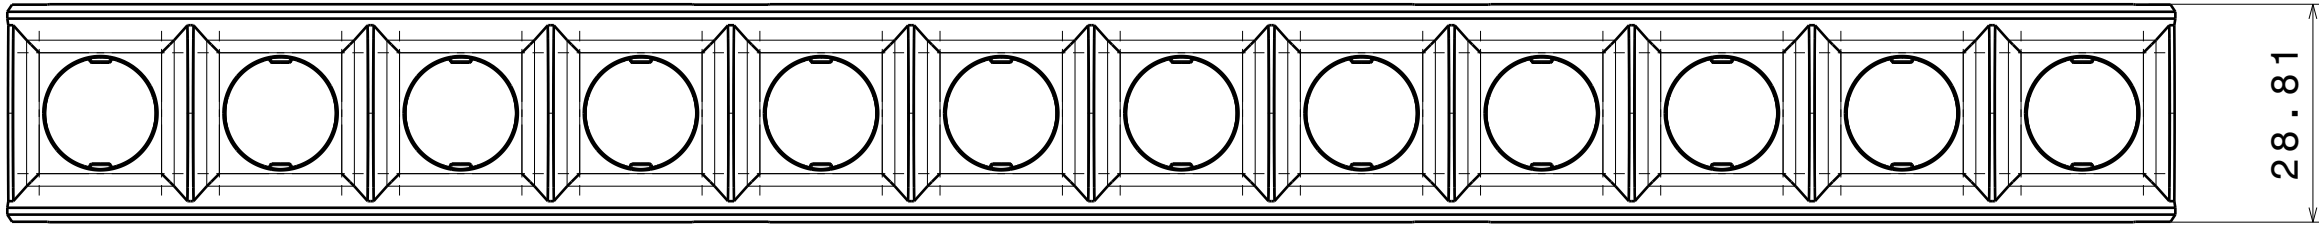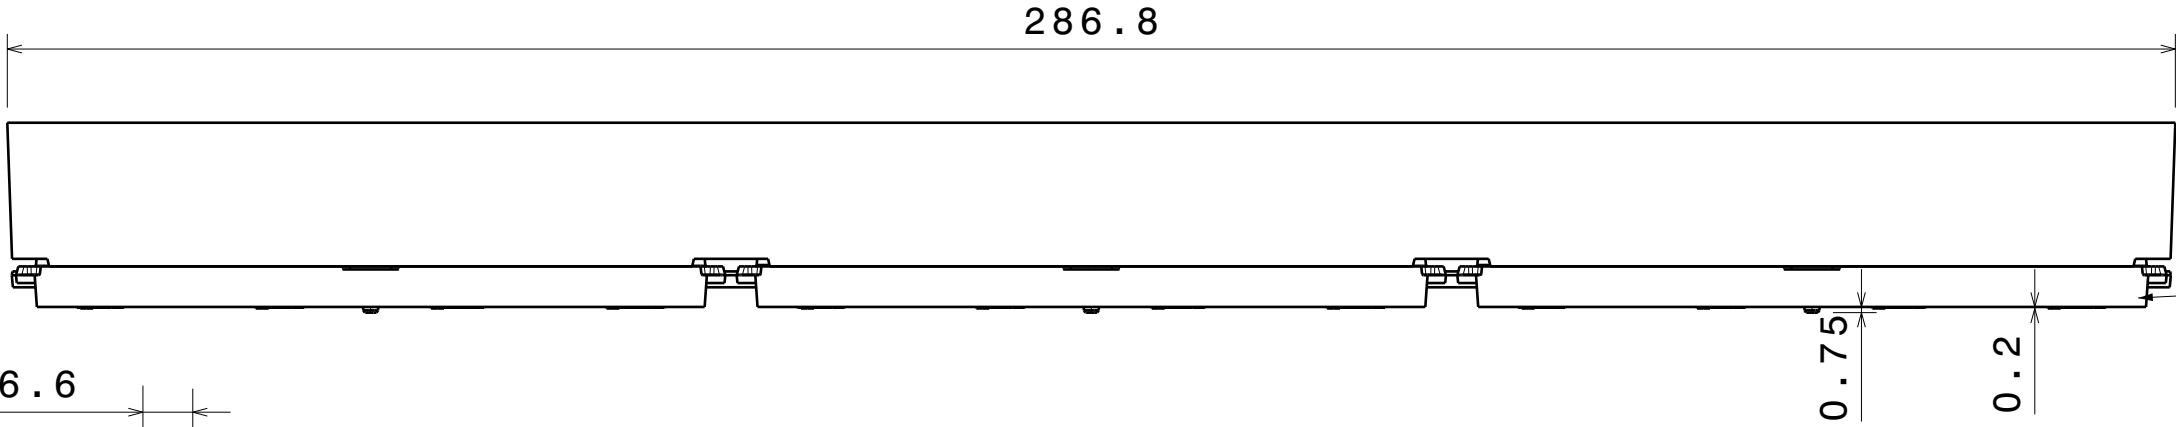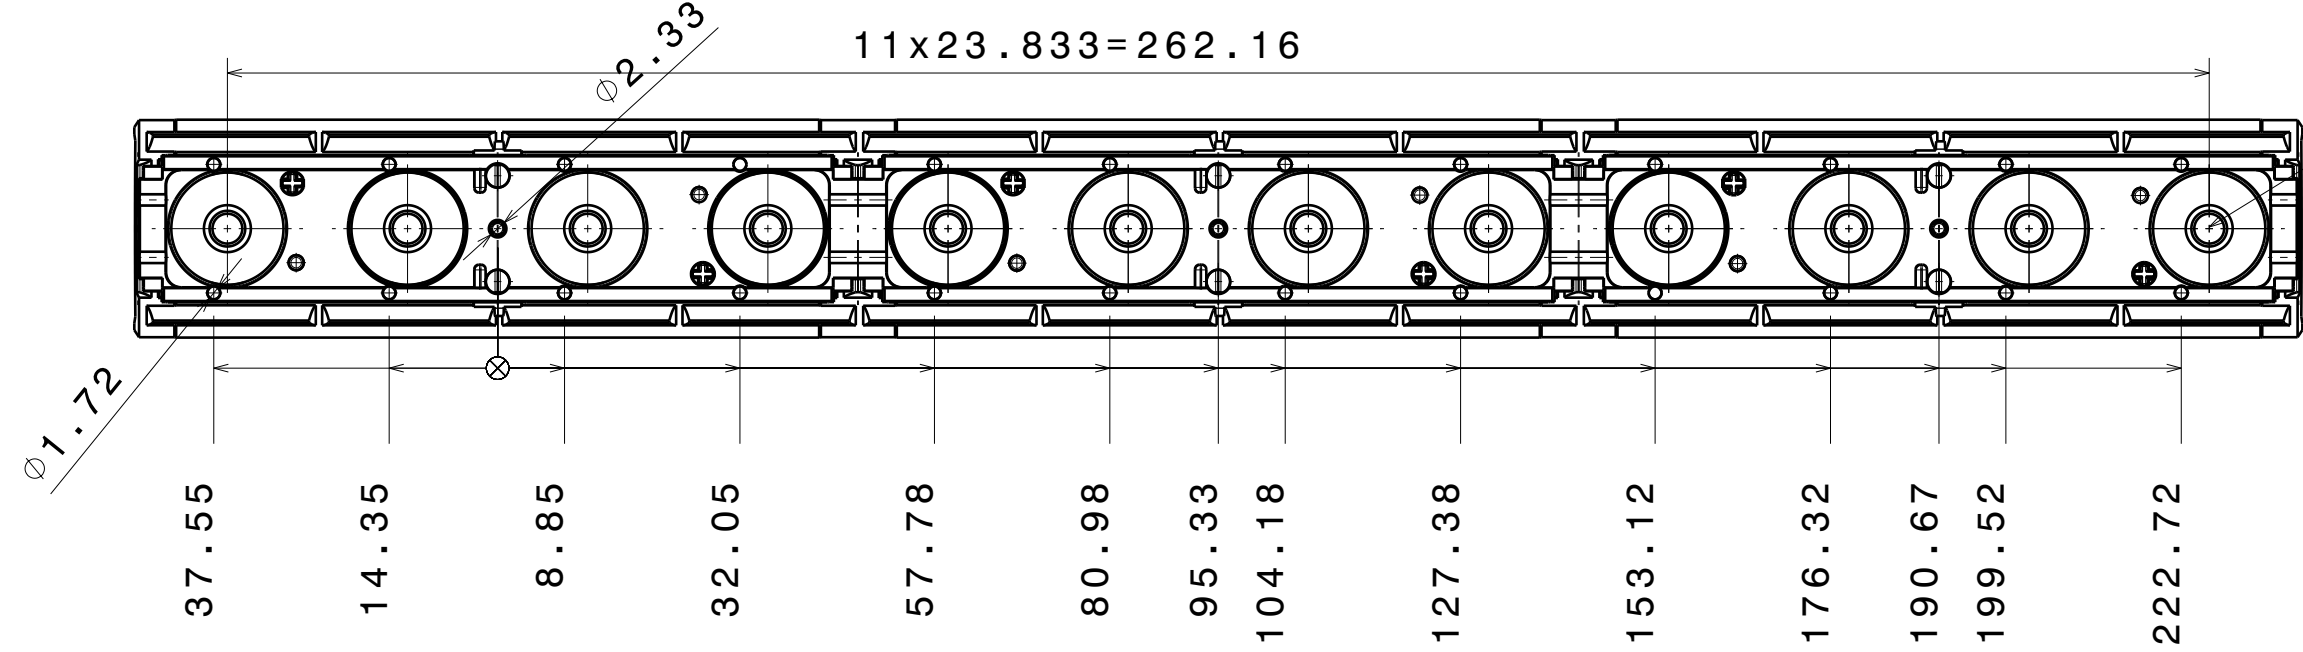

Scale 2:1

INDEX	PART NO	DESCRIPTION	MATERIAL	COLOUR
1	C14446	FLORENTINA-SHD	PC Makrolon 2407	black
2	C14445	FLORENTINA-HLD	PC Makrolon 2407	black
3	C11005	TINA2-XP-M (12pcs)	PMMA	clear

Tolerances if not otherwise shown
According to DIN ISO 2768-1
Linear measures:
up to 30mm class M, otherwise class C
According to DIN ISO 2768-2
Form and position: class L

THIRD ANGLE PROJECTION:

This drawing is the property of LEDiL Oy. It may not be reproduced, copied or communicated without a written agreement with LEDiL Oy.


LEDiL Ledil Oy
Salorankatu 10
FIN 24240 SALO
Finland

DRAWING TITLE
CC15000_FLORENTINA-M

SIZE	PART NUMBER
A3	CC15000


SCALE	1:1	WEIGHT	69,3 g	SHEET	1/1
-------	-----	--------	--------	-------	-----

Luminaire: Ledil CC15000_FLORENTINA-M_(XP-E2)
Lamps: 1 x XP-E2_925.241lm@250mA_CCT=3000K_P=8.66W_I=0.250A

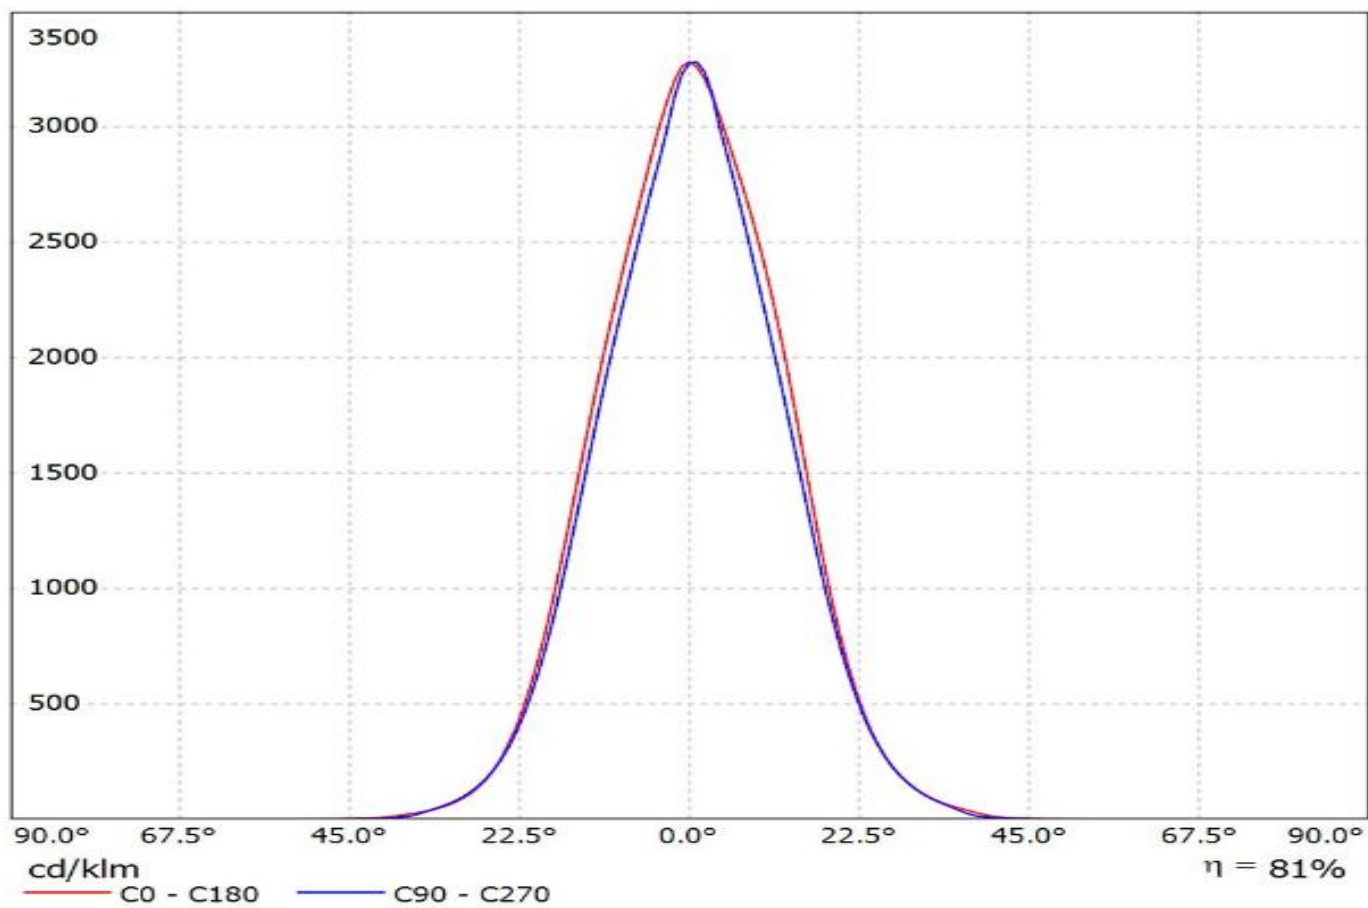


Luminaire: Ledil CC15000_FLORENTINA-M_(XP-G2)

Lamps: 1 x Cree_XP-G2_(XPGBWT-01-4A0-R3-0-01)_1166.49lm@250mA_P=8.4705W_I=0.25A

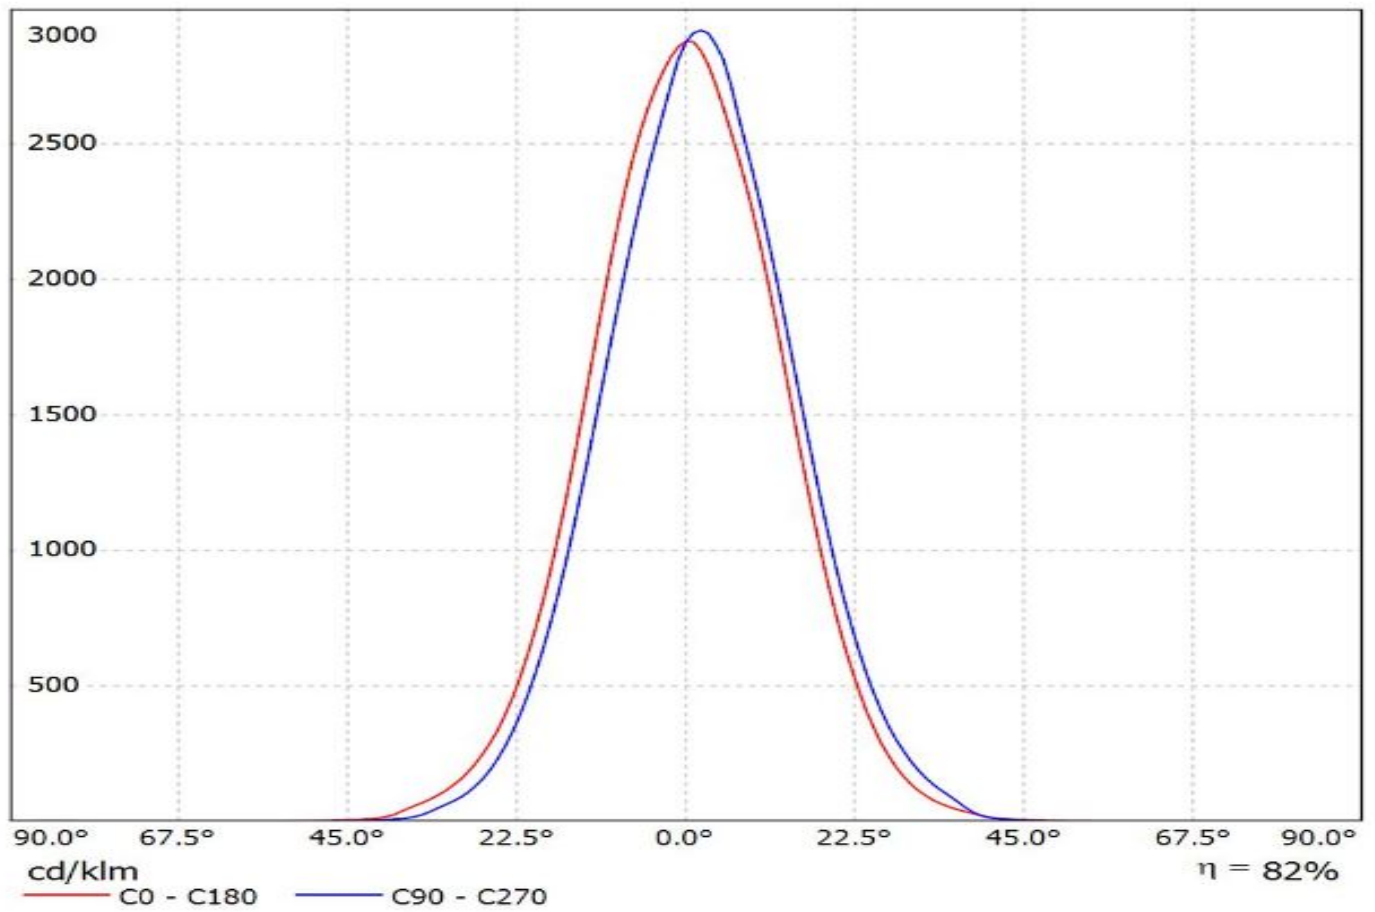


Luminaire: Ledil CC15000_FLORENTINA-M (LG_H35C1)
Lamps: 1 x LG_H35C1_x12_1386.4lm@250mA_P=8.5608W_I=0.25A

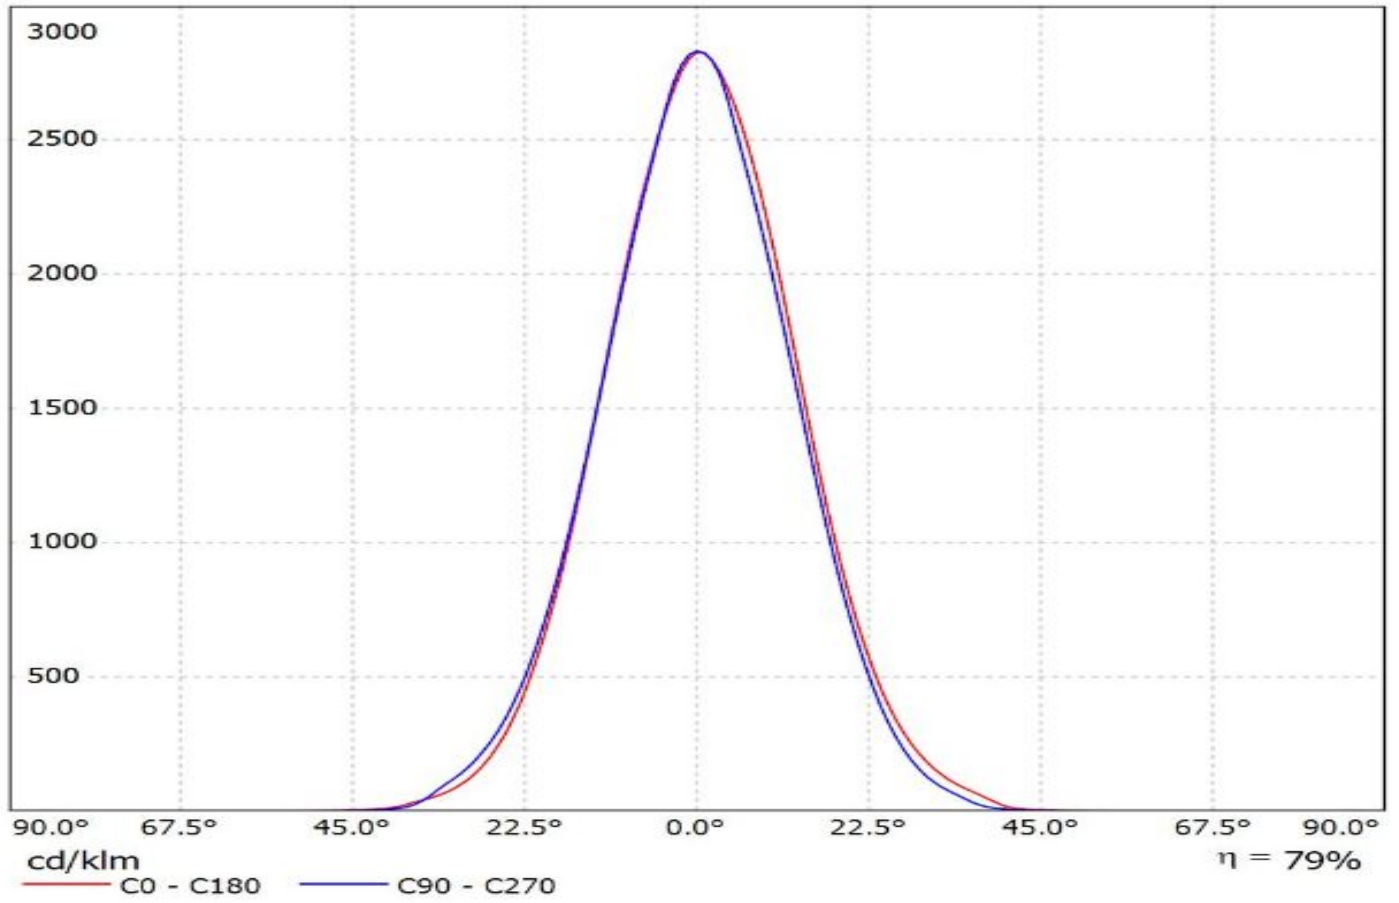

Ledil CC15000_FLORENTINA-M_(Rebel_Plus) / LDC (Linear)


Luminaire: Ledil CC15000_FLORENTINA-M_(Rebel_Plus)
Lamps: 1 x Luxeon_Rebel_Plus_x12_(LX18-P140-3)
_1023.73lm@250mA_CCT=4000K_P=8.4525W_I=0.25A

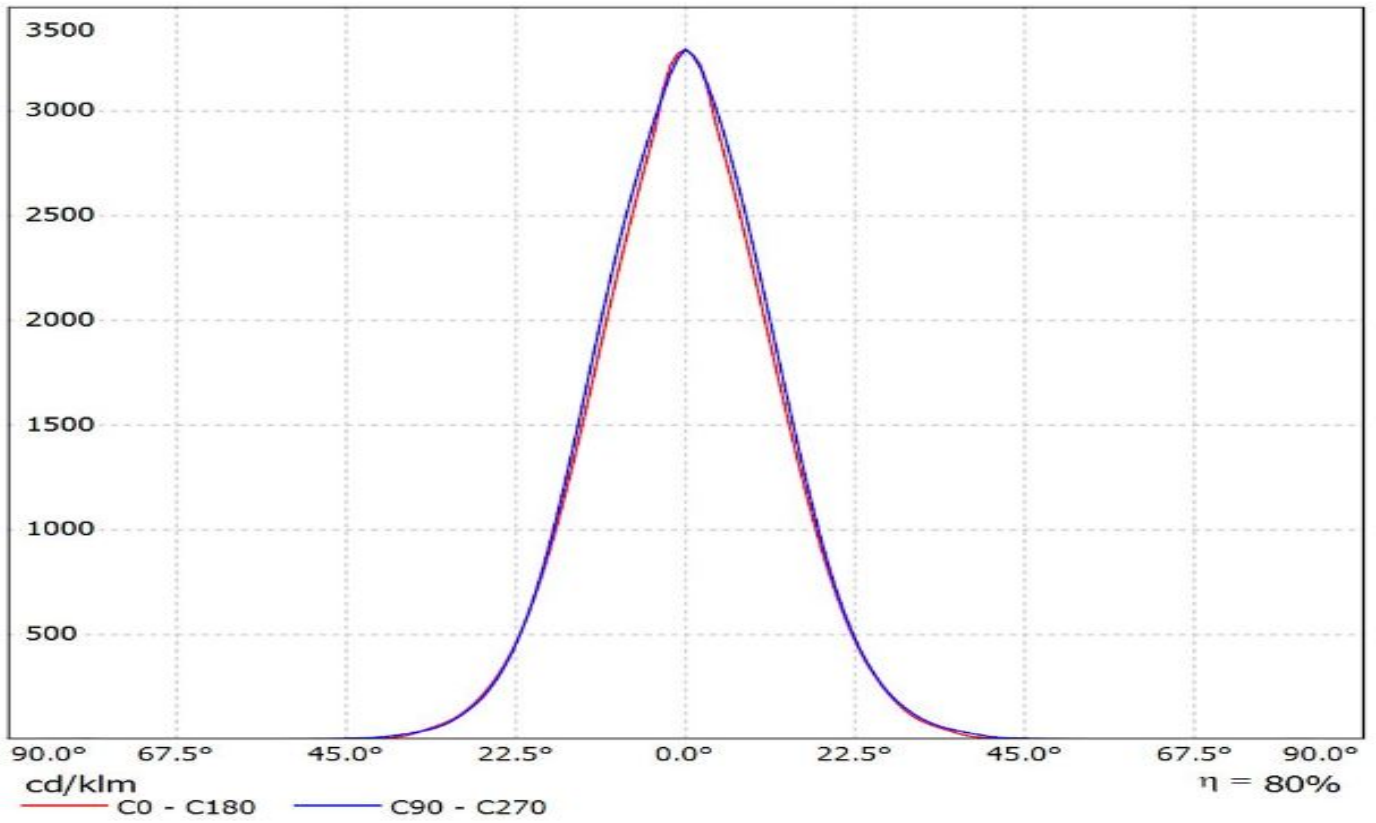

Ledil CC15000_FLORENTINA-M_(Luxeon_TX) / LDC (Linear)

Luminaire: Ledil CC15000_FLORENTINA-M_(Luxeon_TX)


Lamps: 1 x Luxeon_TX_x12_(L1T2-5770)_1350.11lm@250mA_CCT=5700K_P=8.3223W_I=0.25A

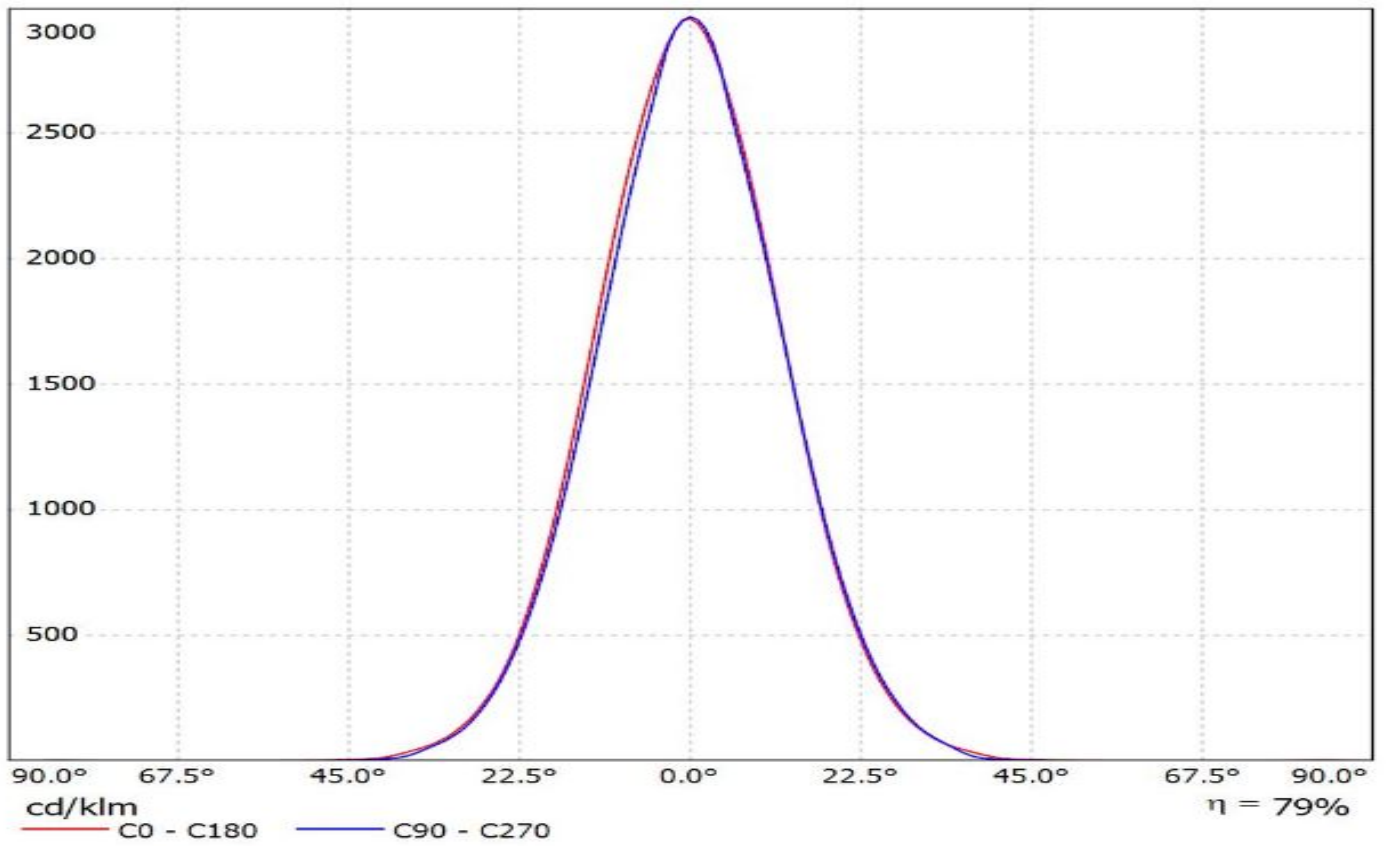


Ledil CC15000_FLORENTINA-M_(Rebel_ES) / LDC (Linear)

Luminaire: Ledil CC15000_FLORENTINA-M_(Rebel_ES)

Lamps: 1 x Luxeon_Rebel_ES_x12_(LXML-PWC2)_1133.87lm@250mA_P=8.6613W_I=0.25A

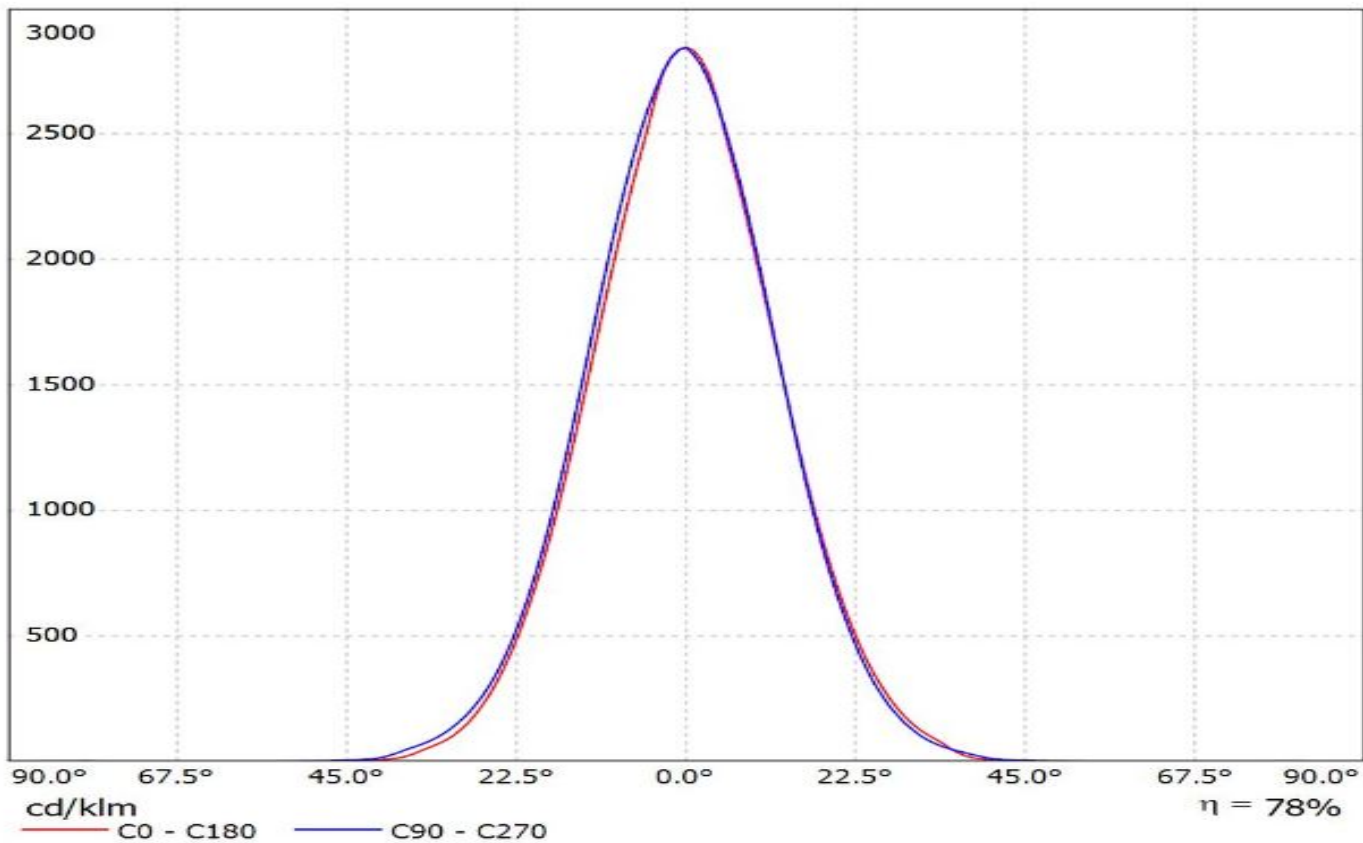


Luminaire: Ledil CC15000_FLORENTINA-M (Luxeon_Z-ES)
Lamps: 1 x Luxeon_Z-ES_x12_934.806@250mA_P=8.3W_I=0.25A

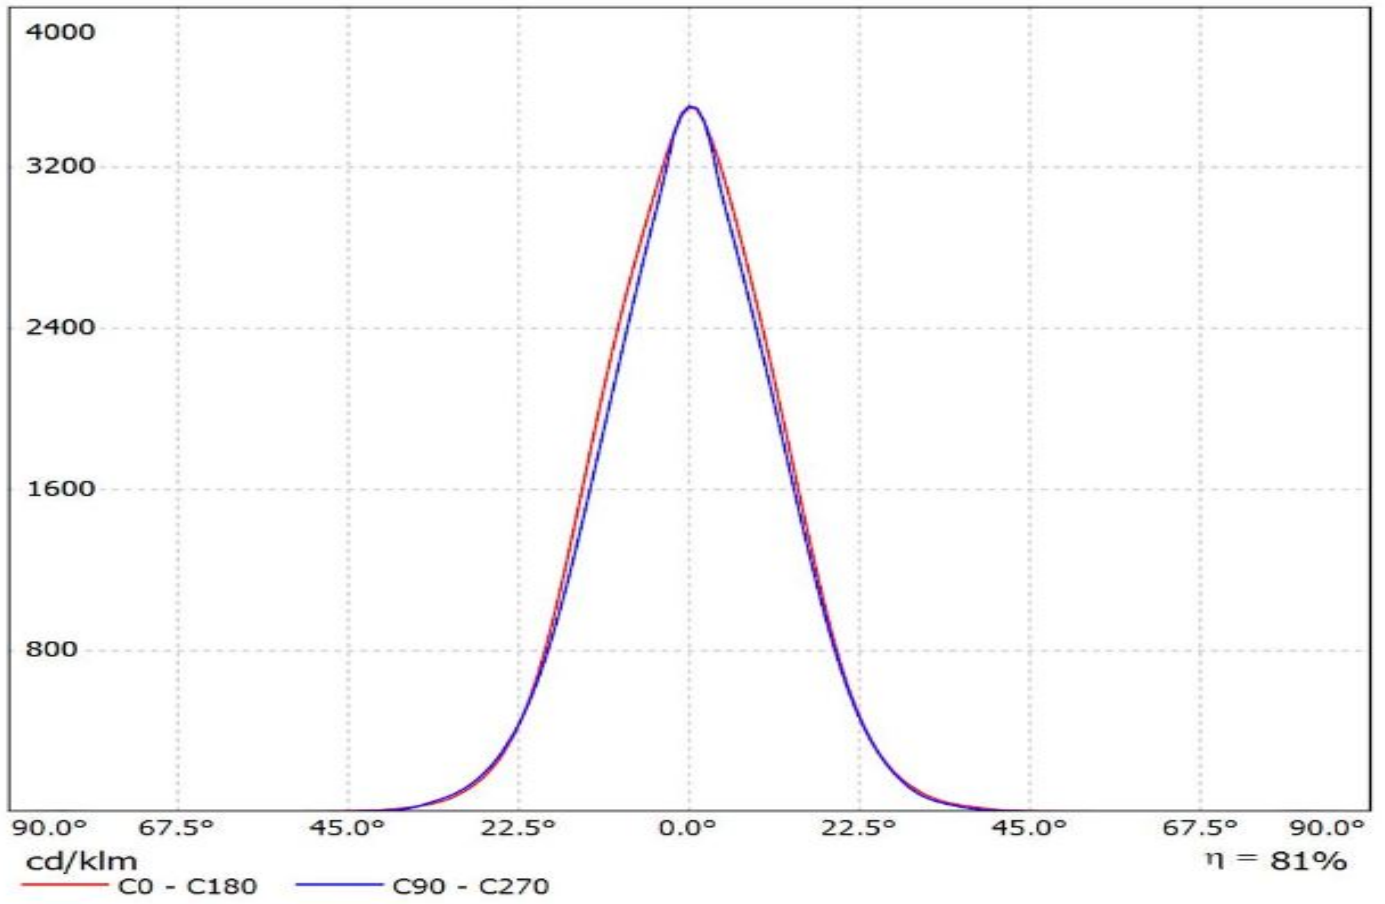


Luminaire: Ledil CC15000_FLORENTINA-M_(NCSL219B)

Lamps: 1 x Nichia_NCSxx19B_x12_(NCSL219B)_935.439lm@250mA_P=8.9467W_I=0.25A

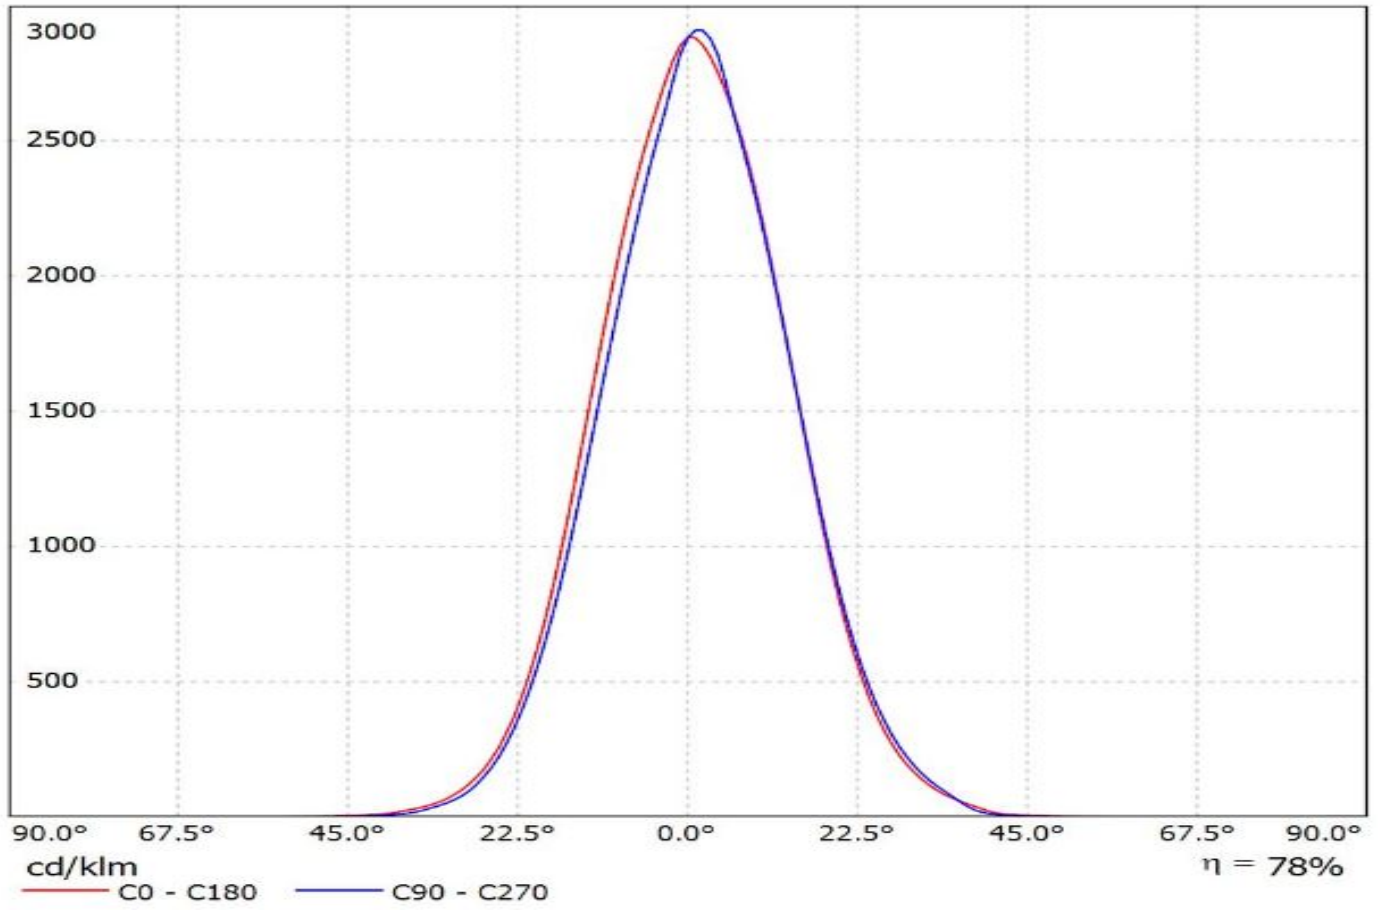


Luminaire: Ledil CC15000_FLORENTINA-M_(NVSL219B)


Lamps: 1 x Nichia_NVSL219B_x12_1040.35@250mA_P=8.6165W_I=0.25A

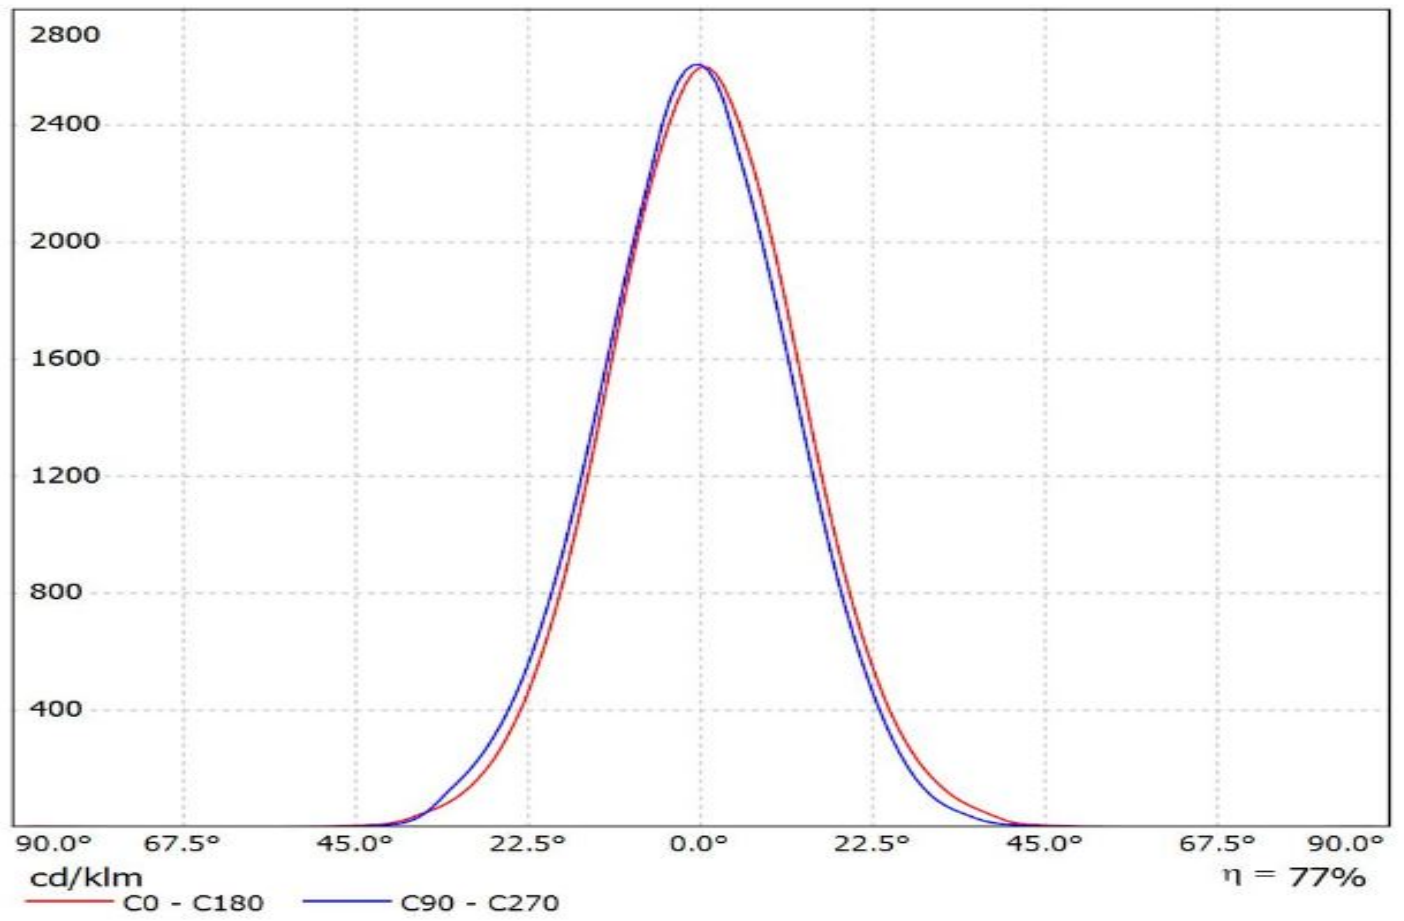


Luminaire: Ledil CC15000_FLORENTINA-M_(Oslon_SSL_80)
Lamps: 1 x Oslon_SSL_80_828.64lm@250mA_CCT=?K_P=9.31W_I=0.250A

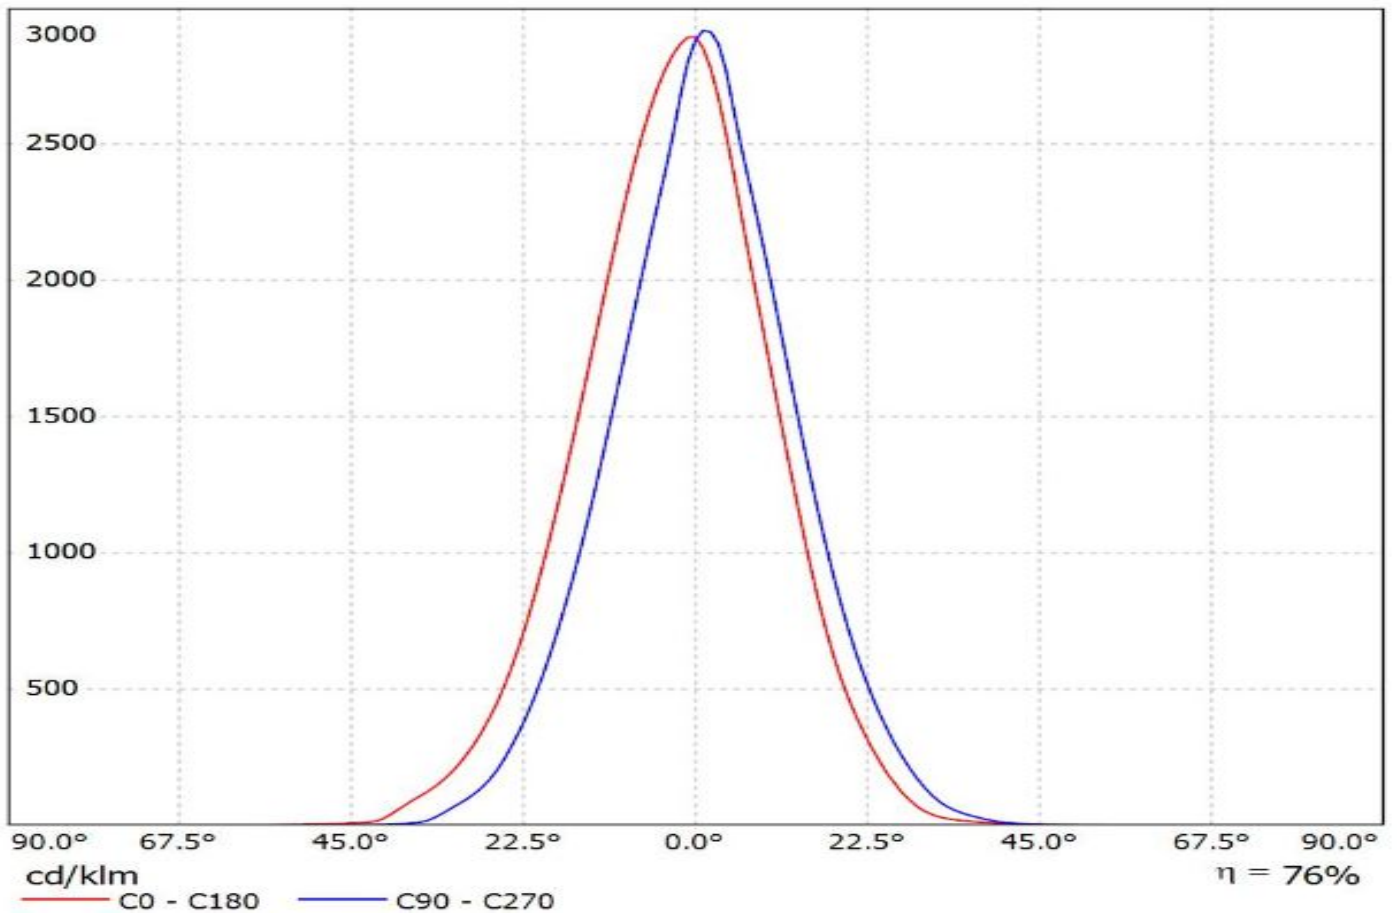

Luminaire: Ledil CC15000_FLORENTINA-M_(SQ-EC)
Lamps: 1 x OSLO_N_SQUARE-EC_x12_1046.45lm@250mA_P=8.3193W_I=0.25A

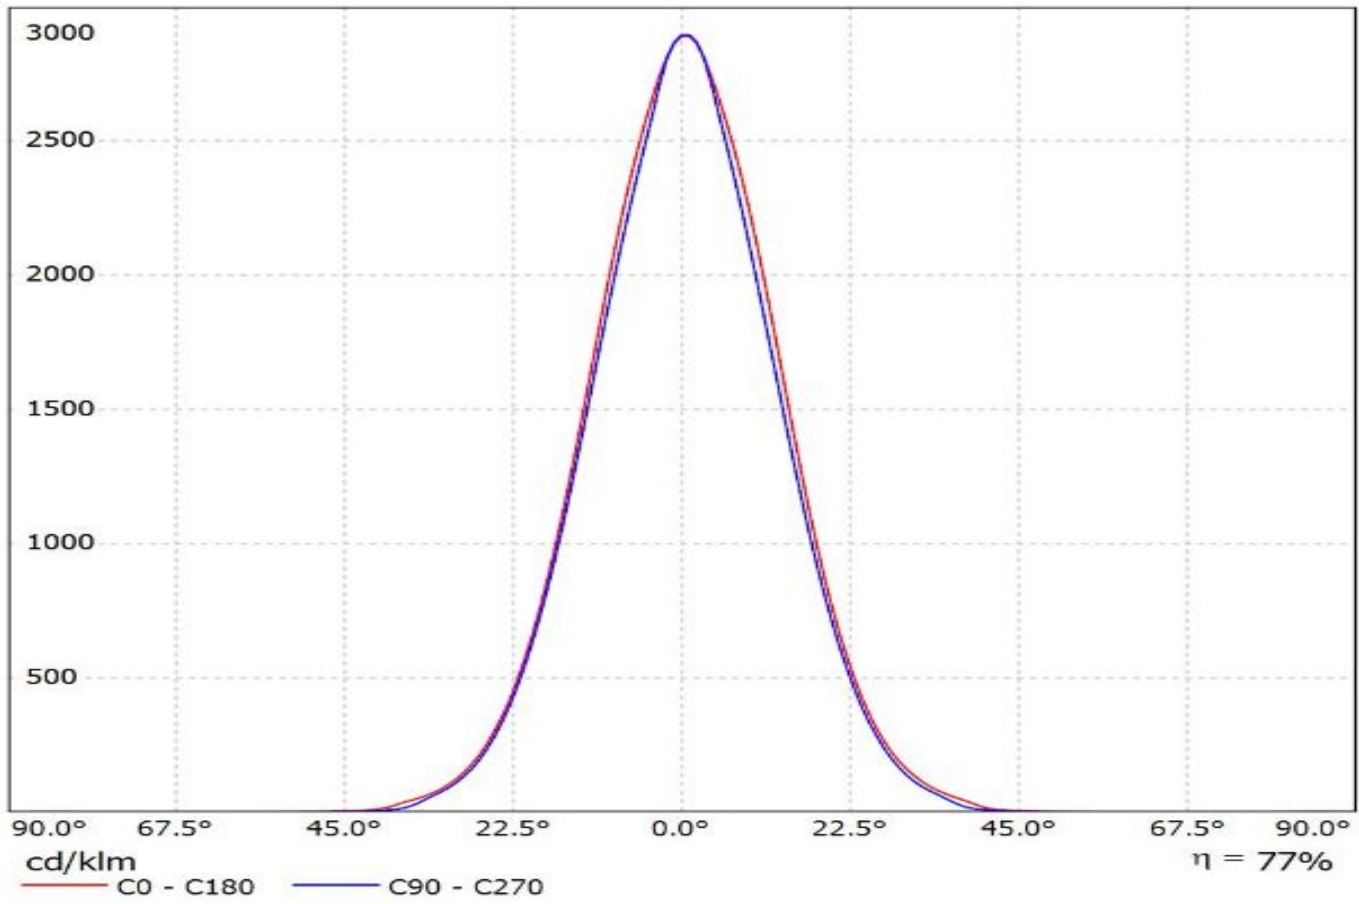


Luminaire: Ledil CC15000_FLORENTINA-M_(SSL150)
Lamps: 1 x Oslon_SSL150_995.439lm@250mA_P=8.4375W_I=0.25A

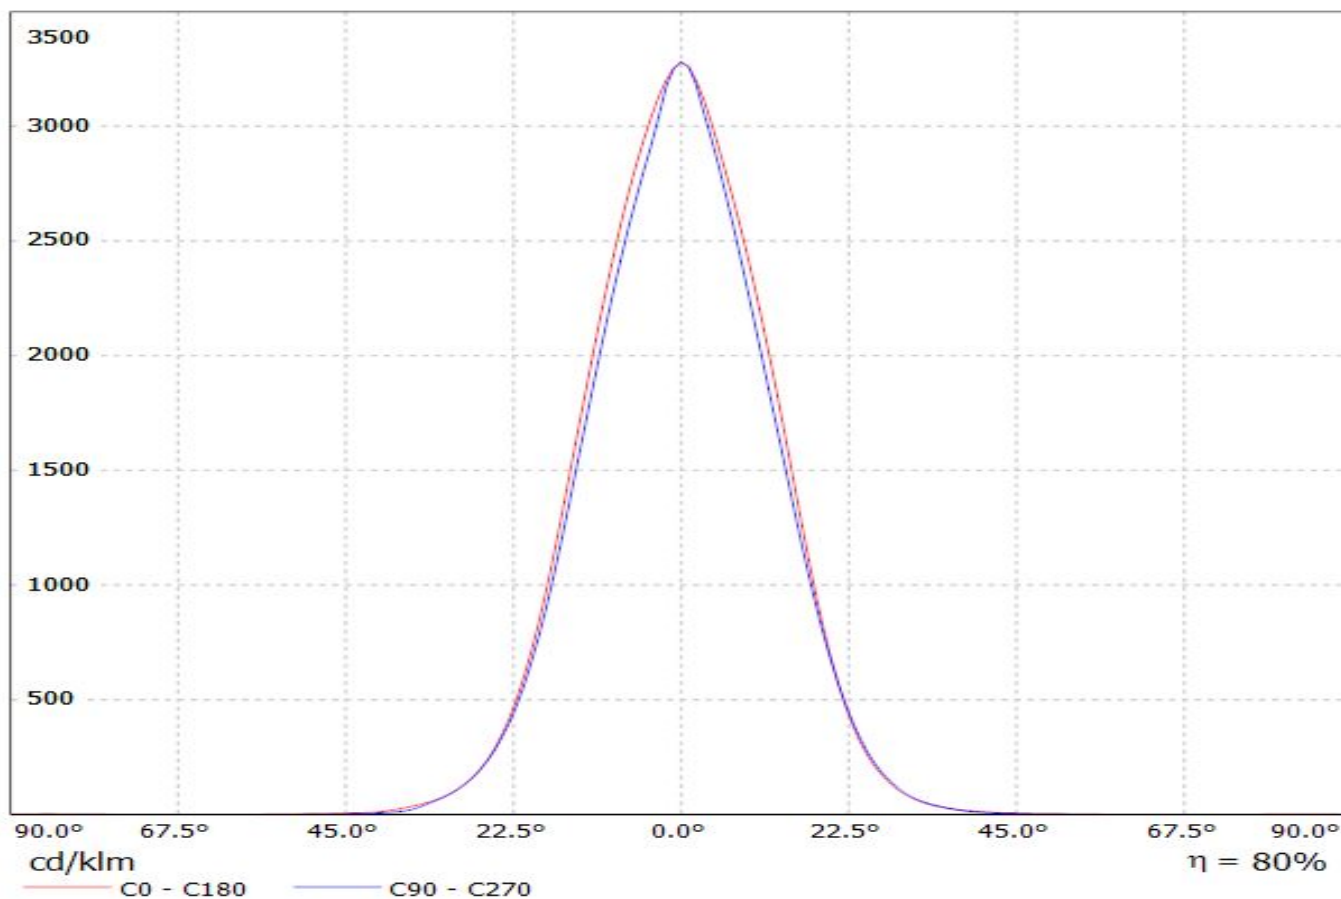


Luminaire: Ledil CC15000_FLORENTINA-M_(LH351B)

Lamps: 1 x Samsung_LH351B_x12_1310.26@250mA_P=8.4105W_I=0.25A

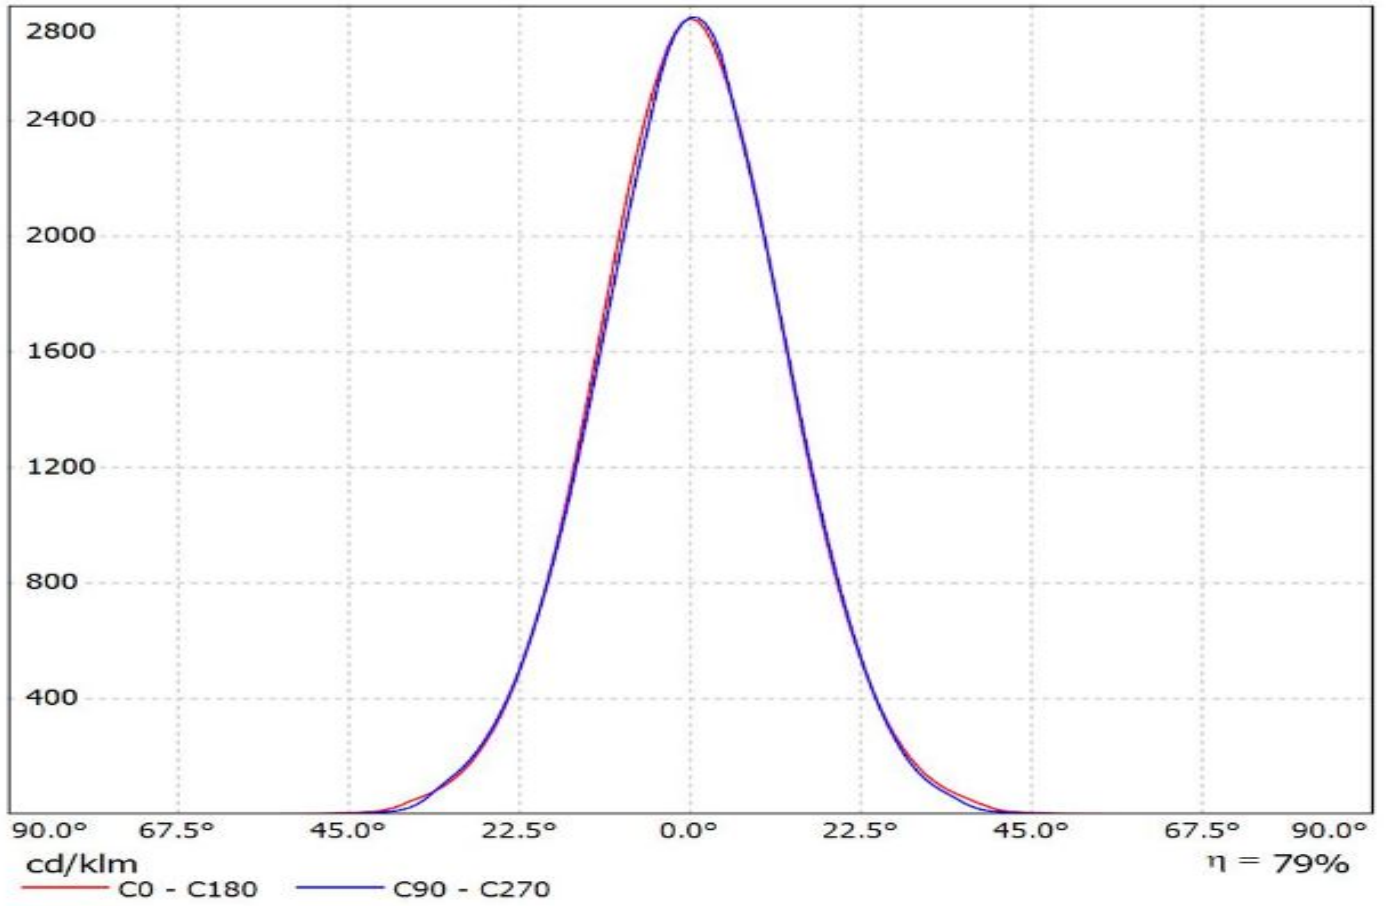


Luminaire: Ledil CC15000_FLORENTINA-M_(TL1L4)
Lamps: 1 x Toshiba_TL1L4_1179lm@250mA_P=8.3595W_I=0.25A

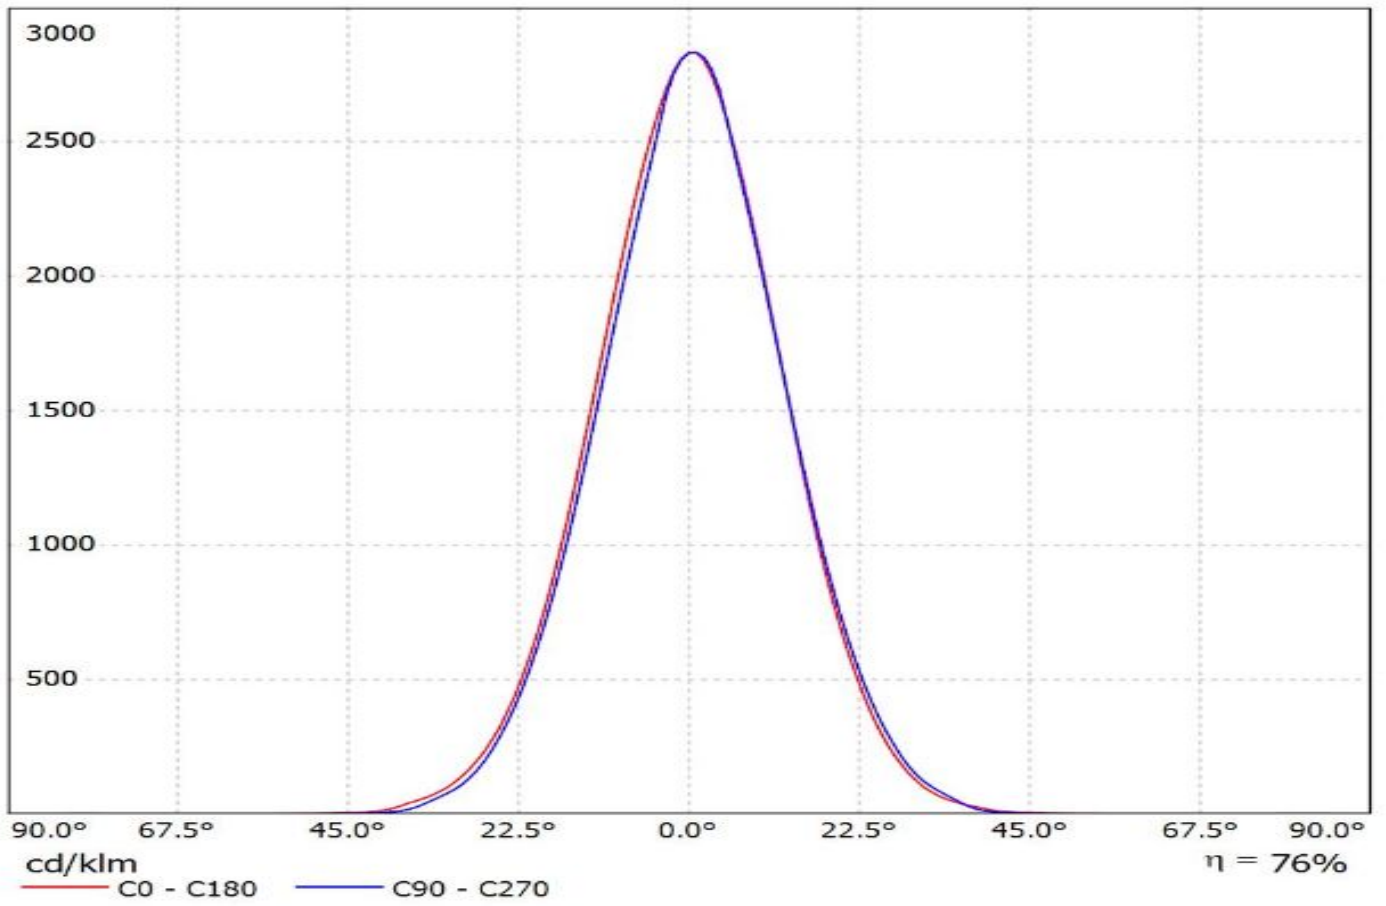

Luminaire: Ledil CC15000_FLORENTINA-M_(XP-E2)

Lamps: 1 x XP-E2_925.24lm@250mA_CCT=3000K_P=8.66W_I=0.250A

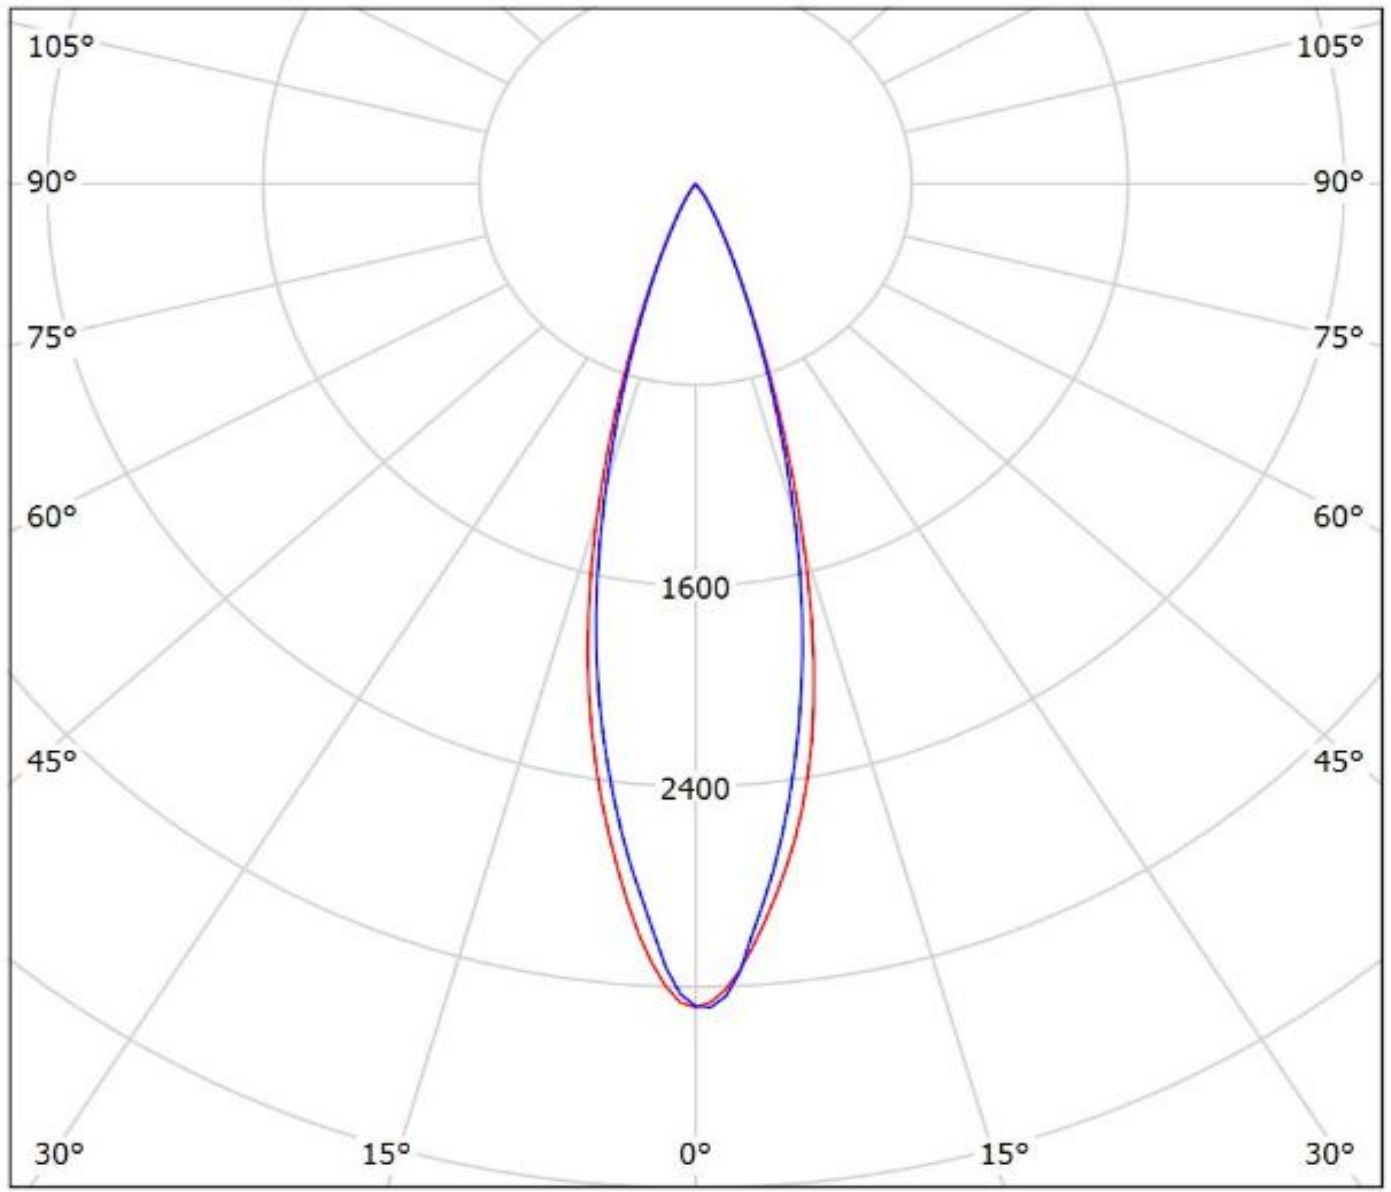


cd/klm

— C0 - C180 — C90 - C270

$\eta = 81\%$

Luminaire: Ledil CC15000_FLORENTINA-M_(XP-G2)

Lamps: 1 x Cree_XP-G2_(XPGBWT-01-4A0-R3-0-01)_1166.49lm@250mA_P=8.4705W_I=0.25A

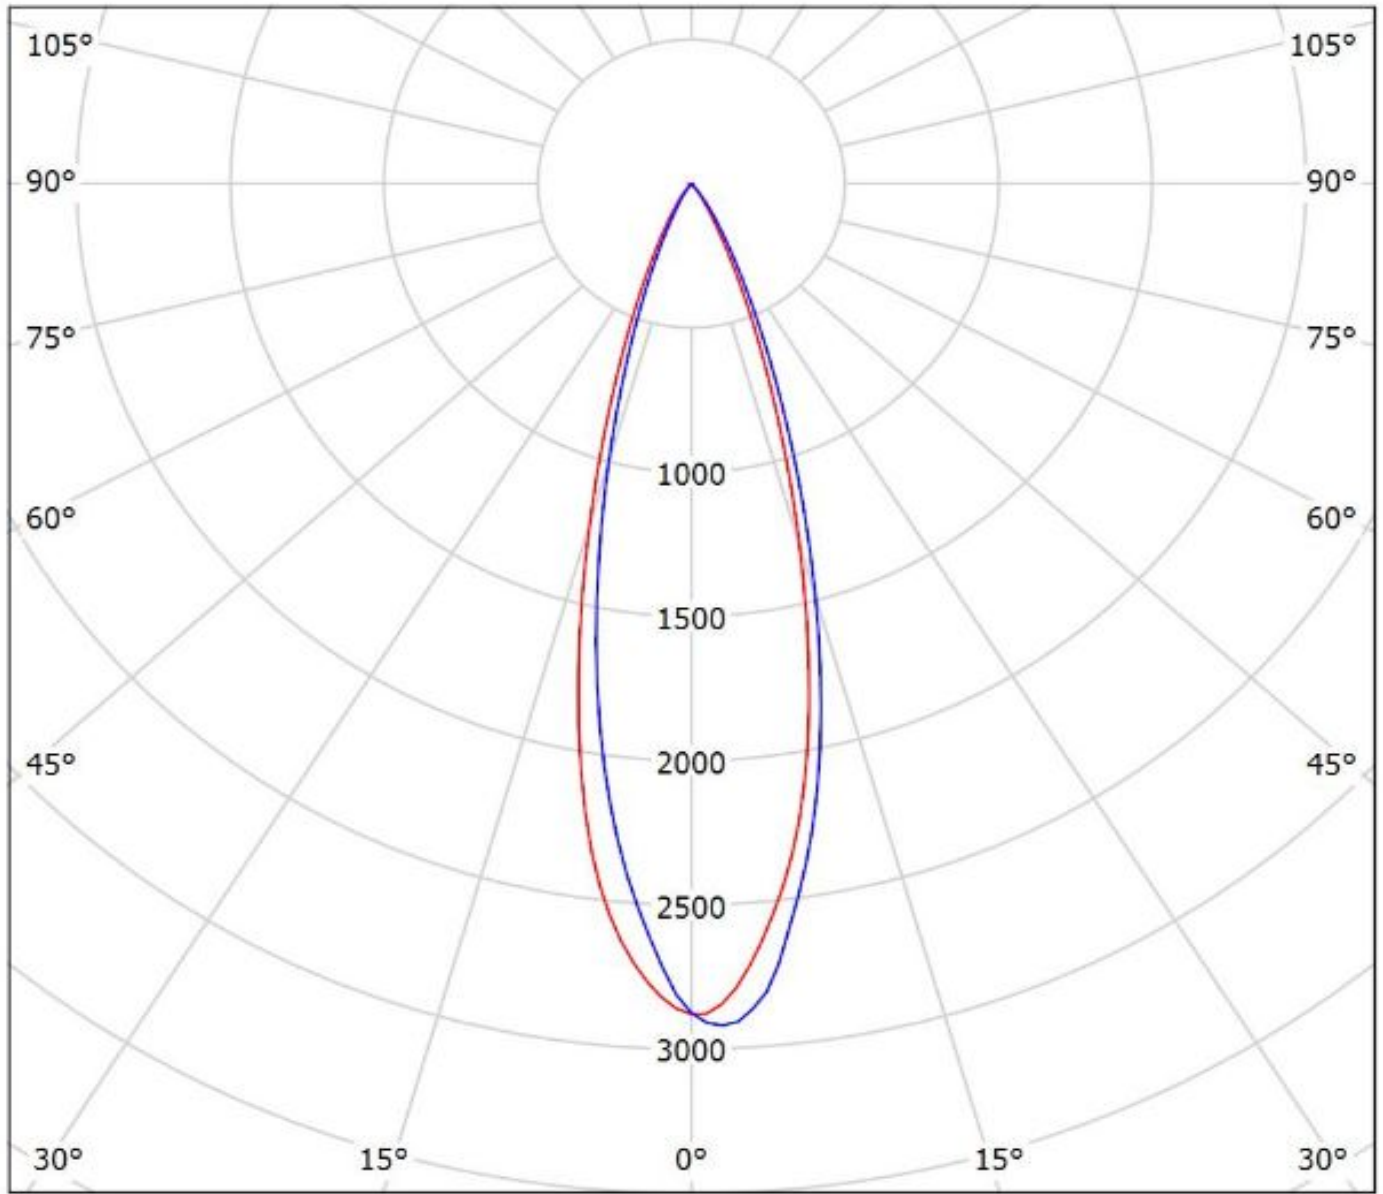


cd/klm

— C0 - C180 — C90 - C270

$\eta = 82\%$

Luminaire: Ledil CC15000_FLORENTINA-M_(LG_H35C1)
Lamps: 1 x LG_H35C1_x12_1386.4lm@250mA_P=8.5608W_I=0.25A

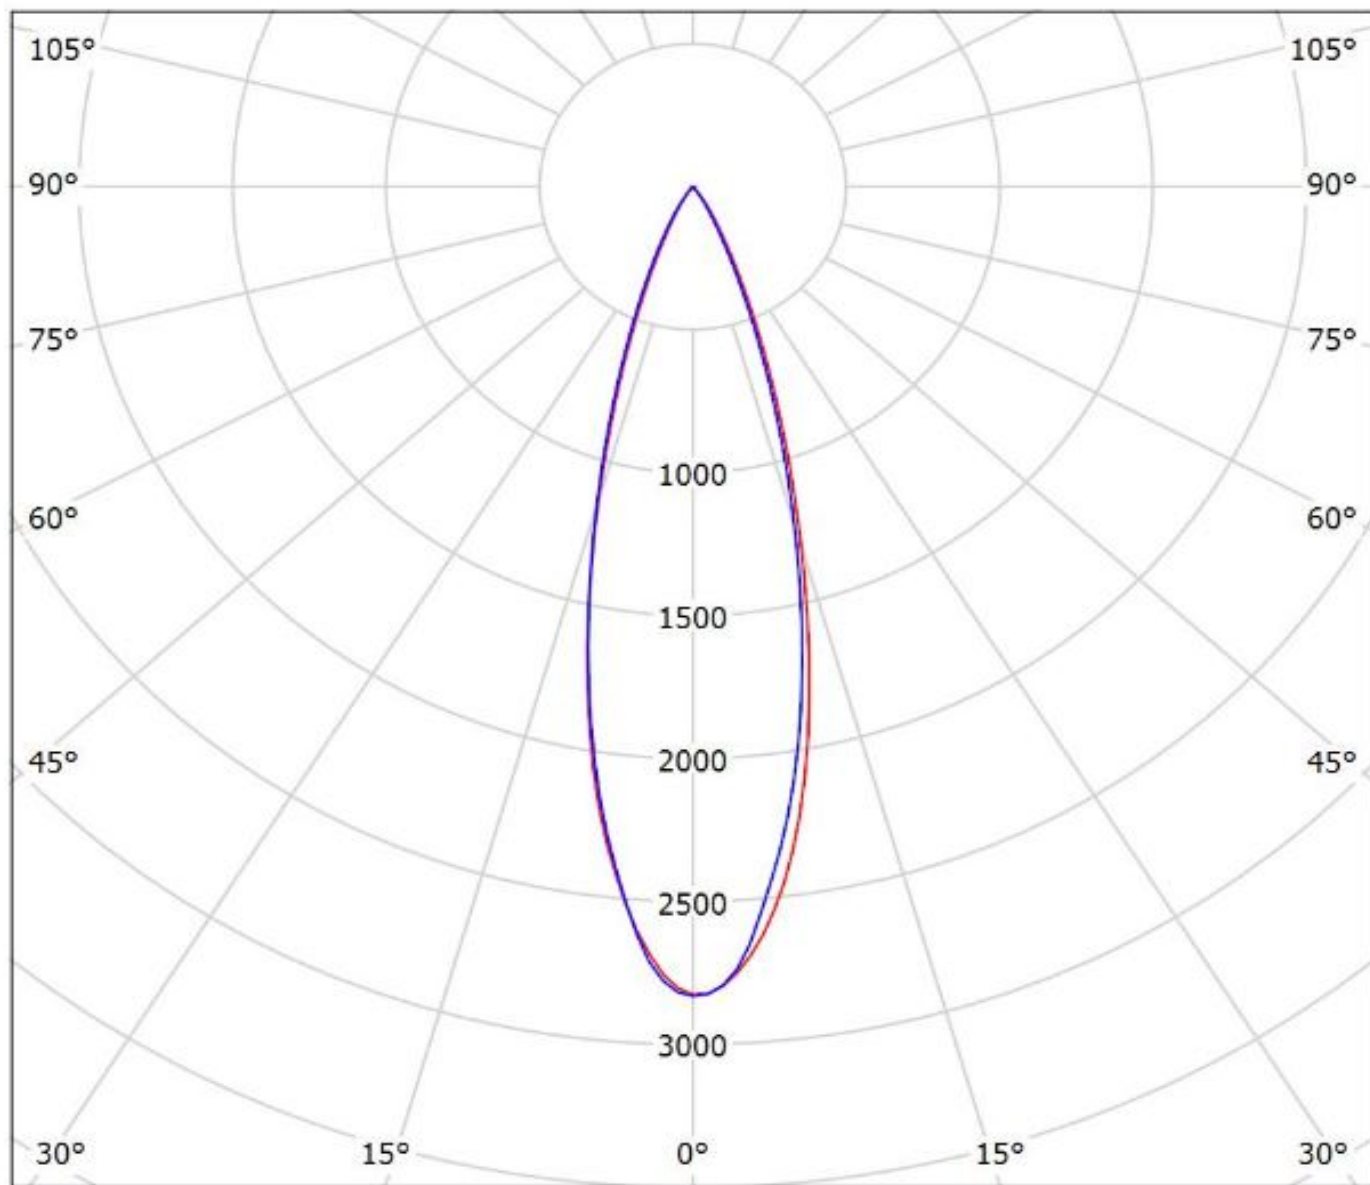


cd/klm
— C0 - C180 — C90 - C270

$\eta = 79\%$

Ledil CC15000_FLORENTINA-M_(Rebel_Plus) / LDC (Polar)


Luminaire: Ledil CC15000_FLORENTINA-M_(Rebel_Plus)
Lamps: 1 x Luxeon_Rebel_Plus_x12_(LX18-P140-3)
_1023.73lm@250mA_CCT=4000K_P=8.4525W_I=0.25A

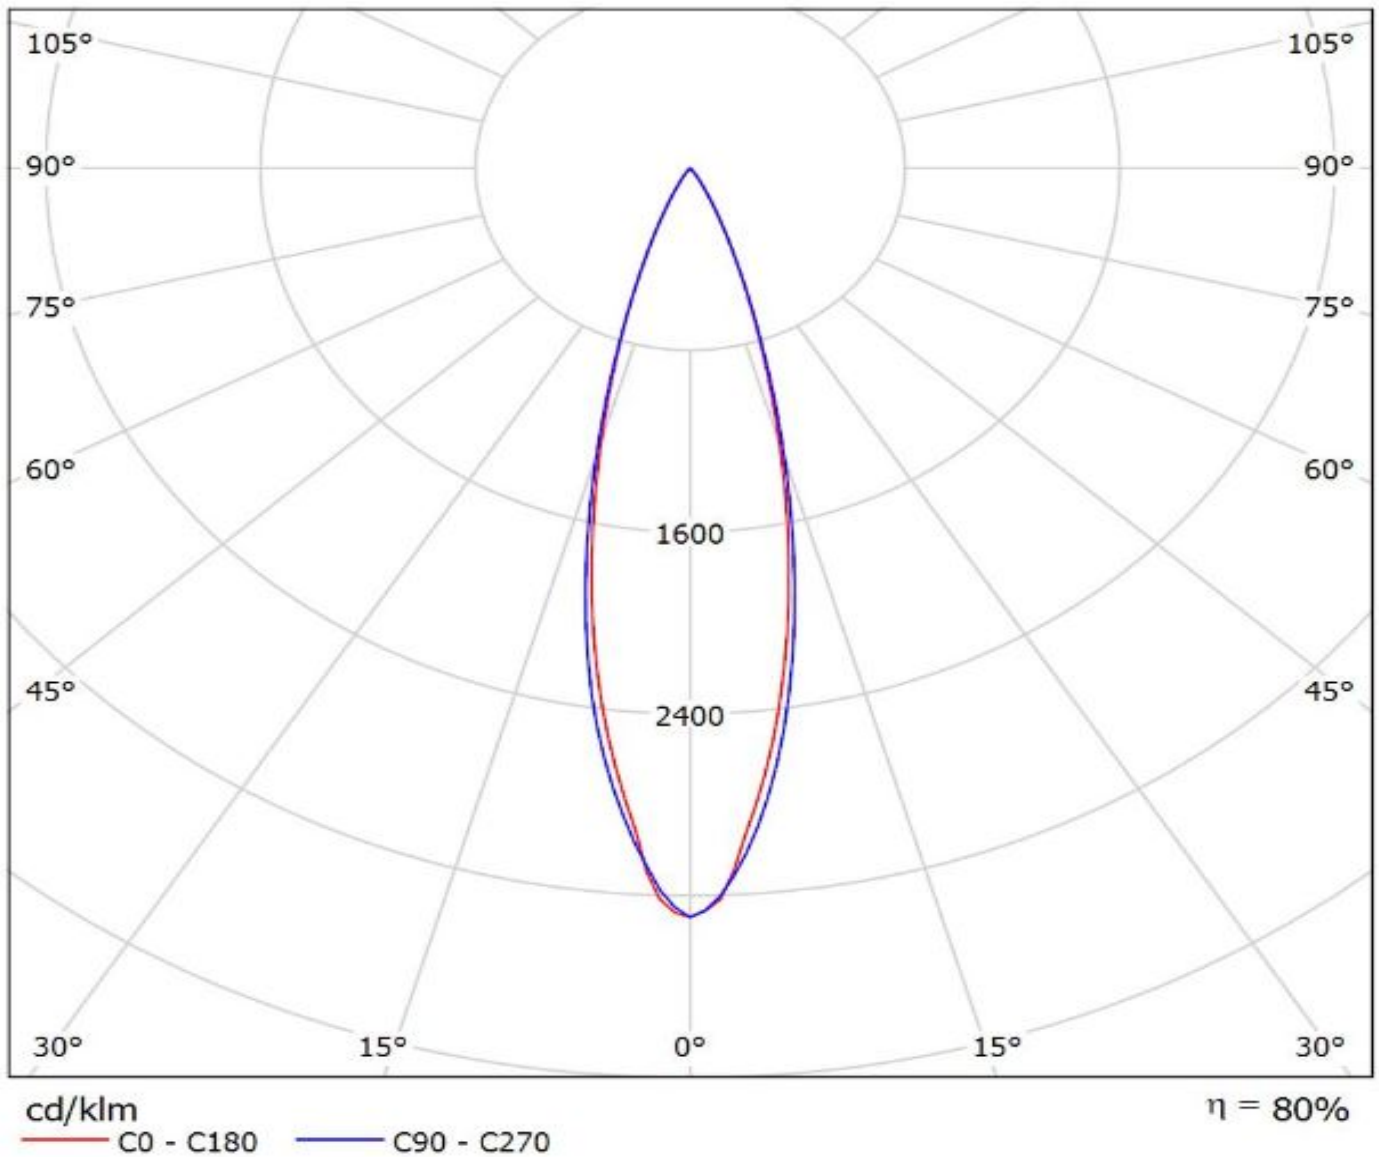

Ledil CC15000_FLORENTINA-M_(Luxeon_TX) / LDC (Polar)

Luminaire: Ledil CC15000_FLORENTINA-M_(Luxeon_TX)

Lamps: 1 x Luxeon_TX_x12_(L1T2-5770)_1350.11lm@250mA_CCT=5700K_P=8.3223W_I=0.25A

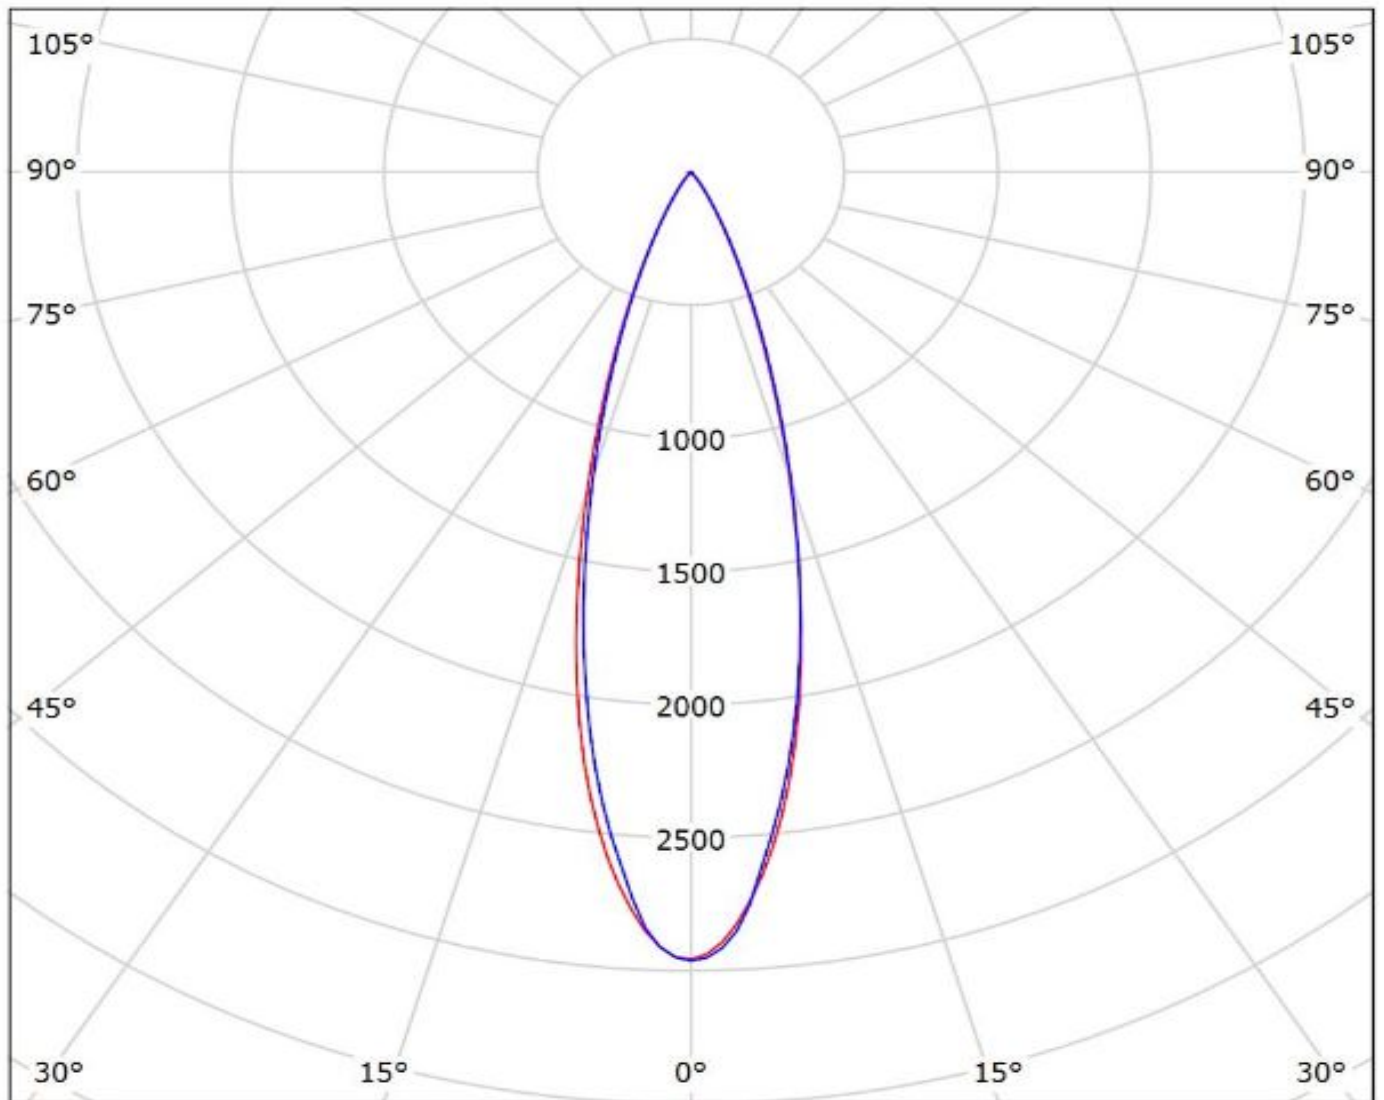

cd/klm


— C0 - C180 — C90 - C270

$\eta = 79\%$


Ledil CC15000_FLORENTINA-M_(Rebel_ES) / LDC (Polar)

Luminaire: Ledil CC15000_FLORENTINA-M_(Rebel_ES)

Lamps: 1 x Luxeon_Rebel_ES_x12_(LXML-PWC2)_1133.87lm@250mA_P=8.6613W_I=0.25A

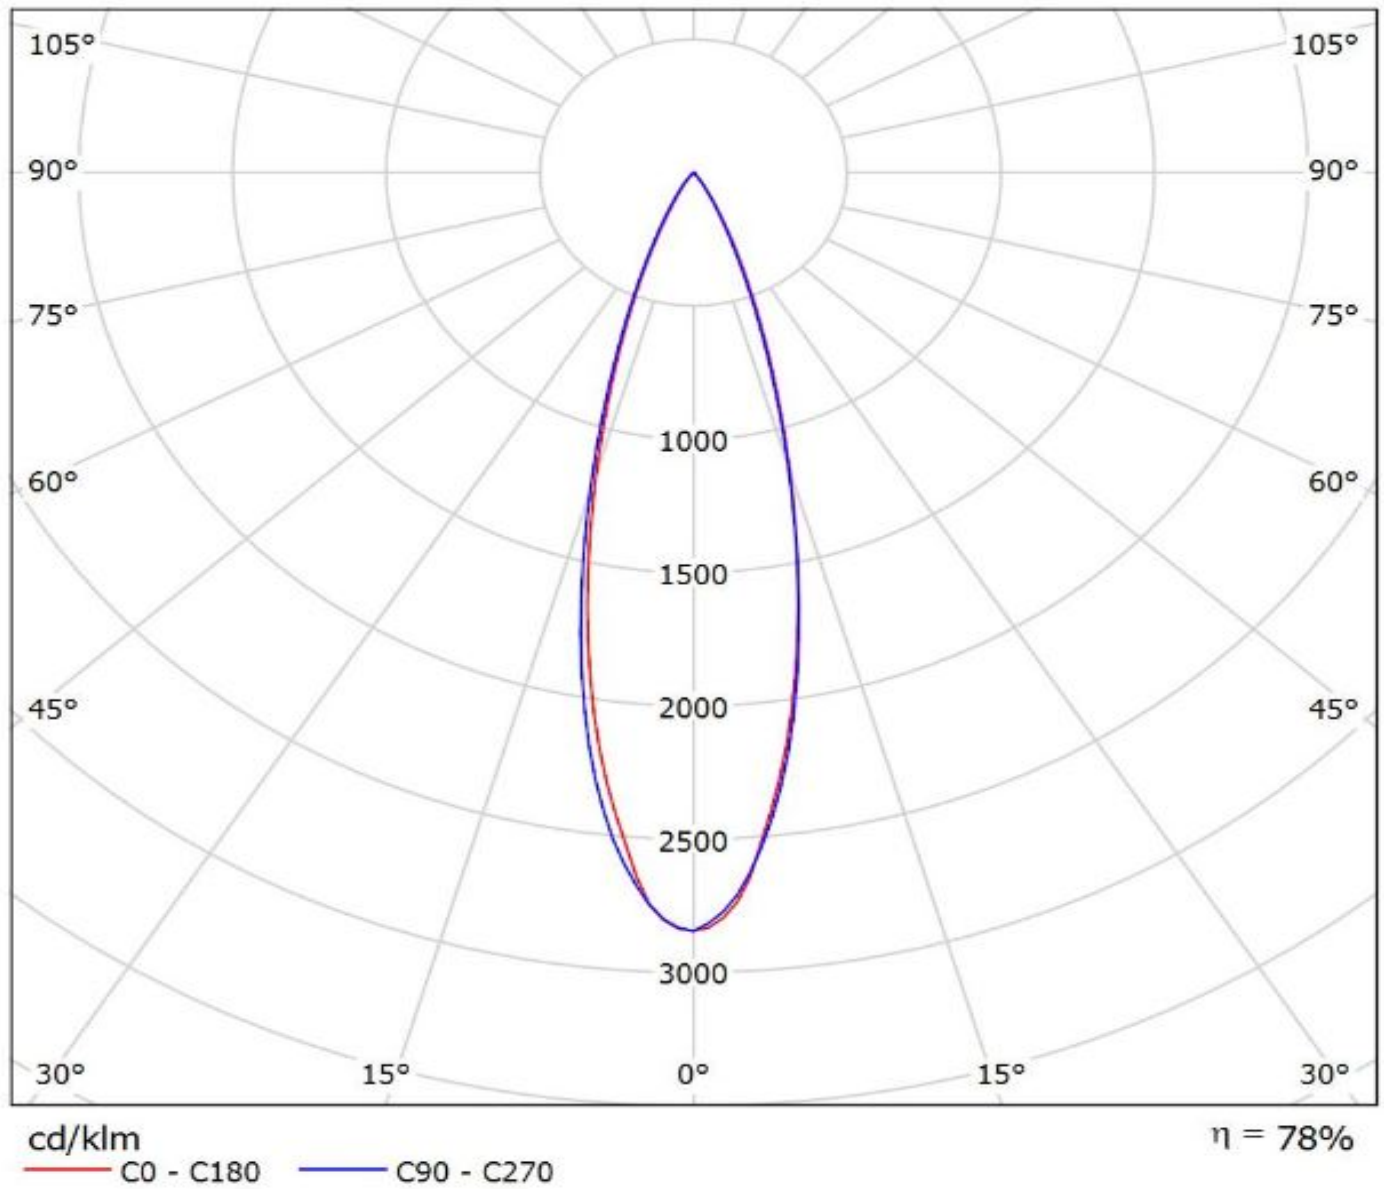

Luminaire: Ledil CC15000_FLORENTINA-M_(Luxeon_Z-ES)
Lamps: 1 x Luxeon_Z-ES_x12_934.806@250mA_P=8.3W_I=0.25A

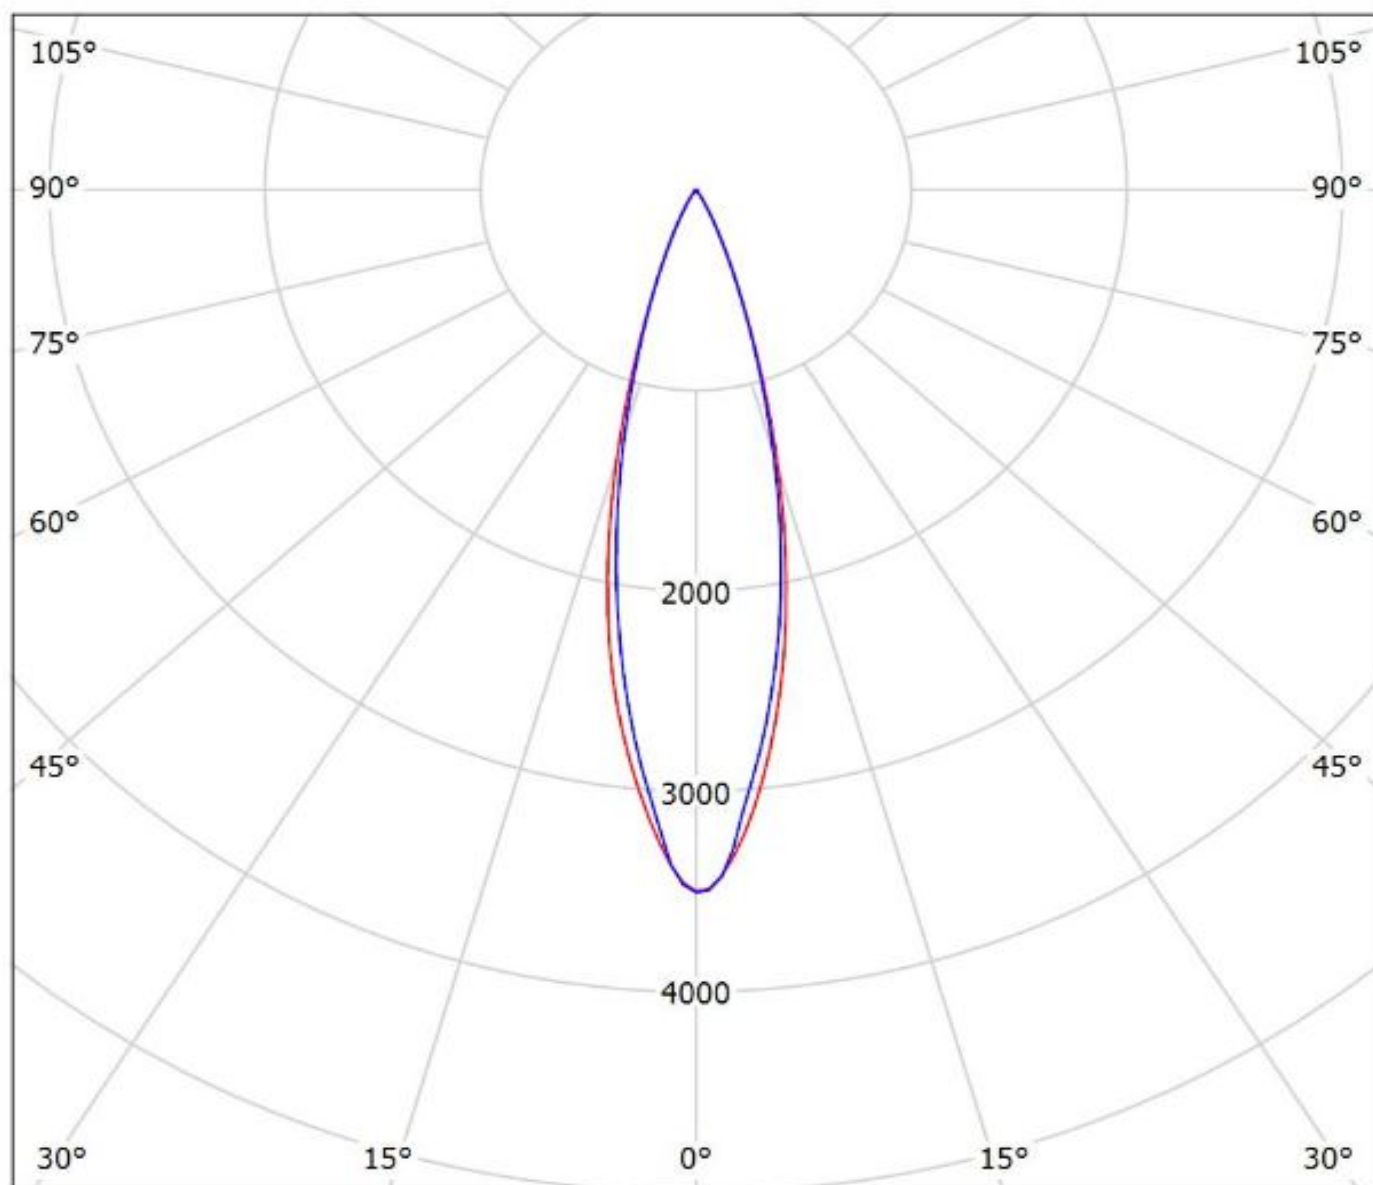


cd/klm

— C0 - C180 — C90 - C270

$\eta = 81\%$

Luminaire: Ledil CC15000_FLORENTINA-M_(NCSL219B)

Lamps: 1 x Nichia_NCSxx19B_x12_(NCSL219B)_935.439lm@250mA_P=8.9467W_I=0.25A

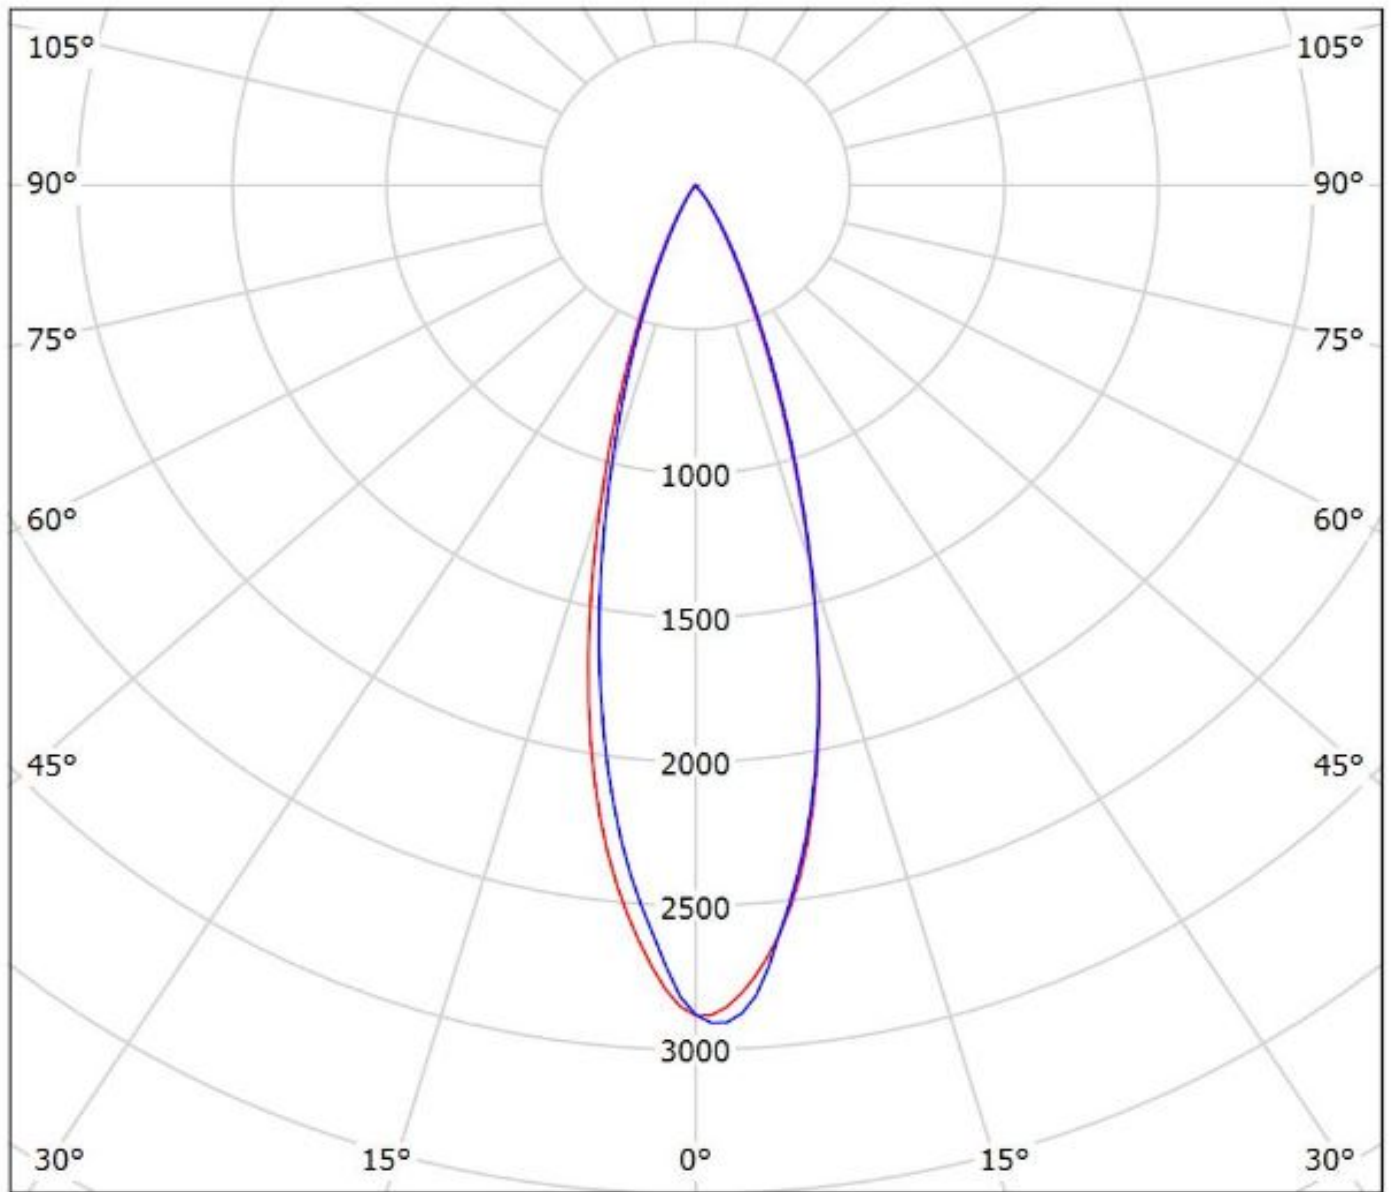

cd/klm


— C0 - C180

— C90 - C270

$\eta = 78\%$

Luminaire: Ledil CC15000_FLORENTINA-M_(NVSL219B)

Lamps: 1 x Nichia_NVSL219B_x12_1040.35@250mA_P=8.6165W_I=0.25A

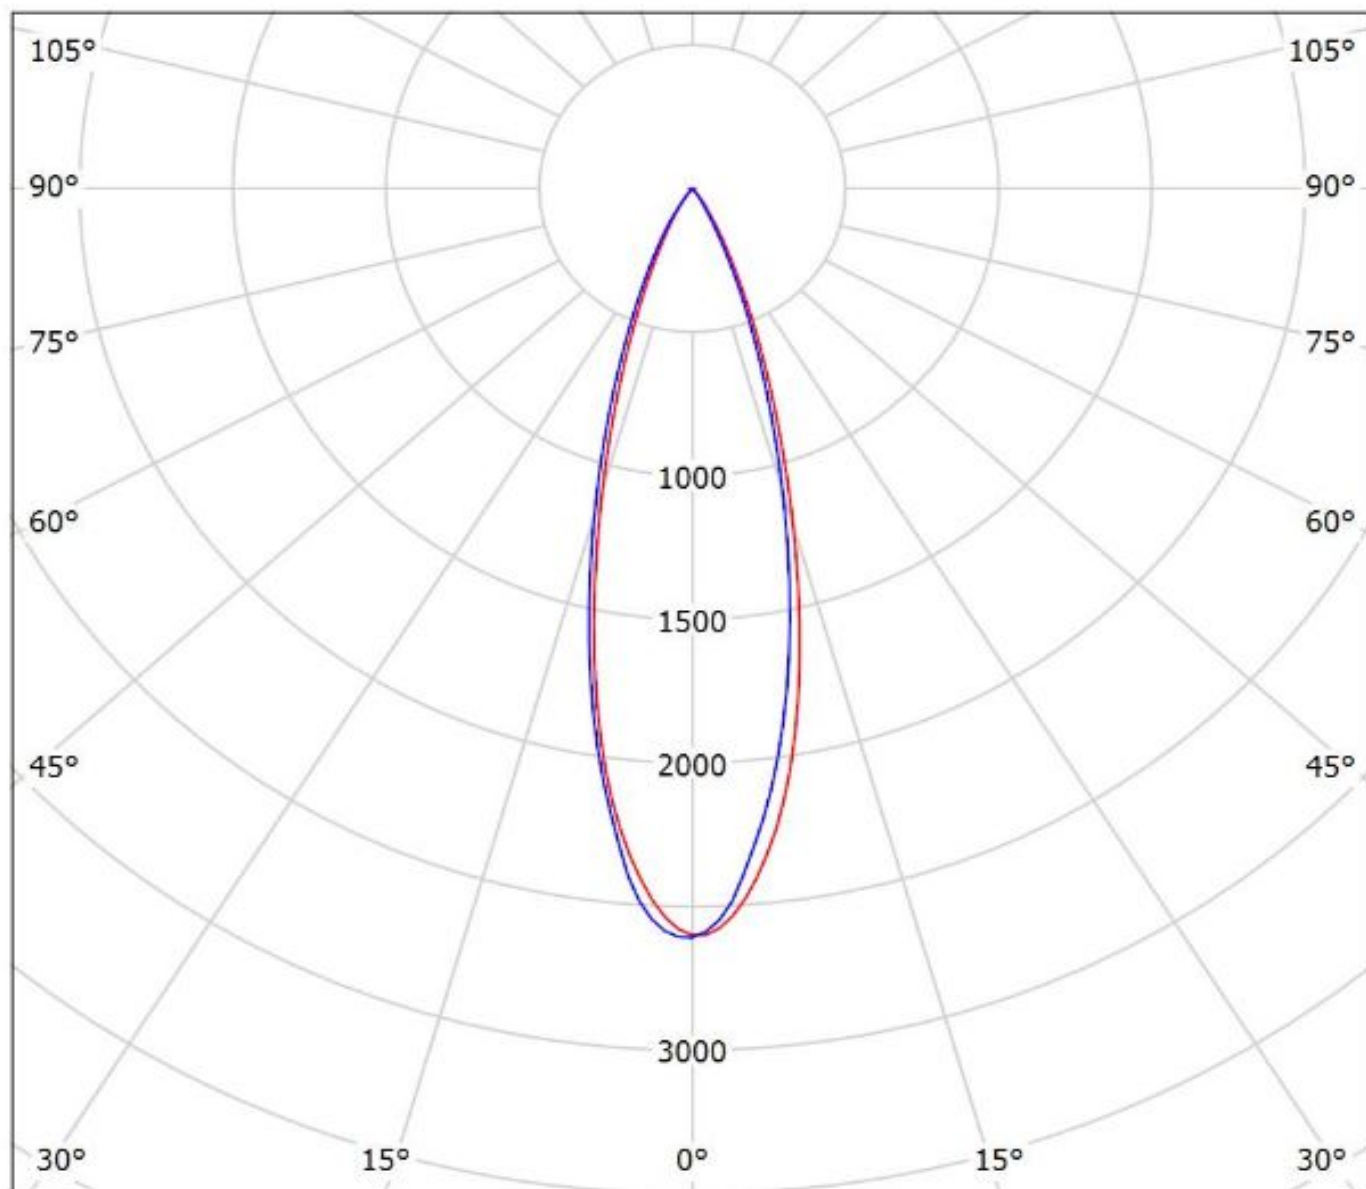

cd/klm

— C0 - C180 — C90 - C270

$\eta = 77\%$