imall

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832 Email & Skype: info@chipsmall.com Web: www.chipsmall.com Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



October 1987 Revised April 2002

SEMICONDUCTOR IM

CD4024BC 7-Stage Ripple Carry Binary Counter

General Description

The CD4024BC is a 7-stage ripple-carry binary counter. Buffered outputs are externally available from stages 1 through 7. The counter is reset to its logical "0" stage by a logical "1" on the reset input. The counter is advanced one count on the negative transition of each clock pulse.


Features

- Wide supply voltage range: 3.0V to 15V
- High noise immunity: 0.45 V_{DD} (typ.)
- Low power TTL compatibility: Fan out of 2 driving 74L or 1 driving 74LS
- High speed: 12 MHz (typ.) input pulse rate V_{DD} - V_{SS} = 10V
- Fully static operation


Ordering Code:

Order Number	Package Number	Package Description			
CD4024BCM	M14A	14-Lead Small Outline Integrated Circuit (SOIC), JEDEC MS-012, 0.150" Narrow			
CD4024BCN	N14A	14-Lead Plastic Dual-In-Line Package (PDIP), JEDEC MS-001, 0.300" Wide			
Devices also available in Tape and Reel. Specify by appending the suffix letter "X" to the ordering code.					

Connection Diagram



© 2002 Fairchild Semiconductor Corporation DS005957

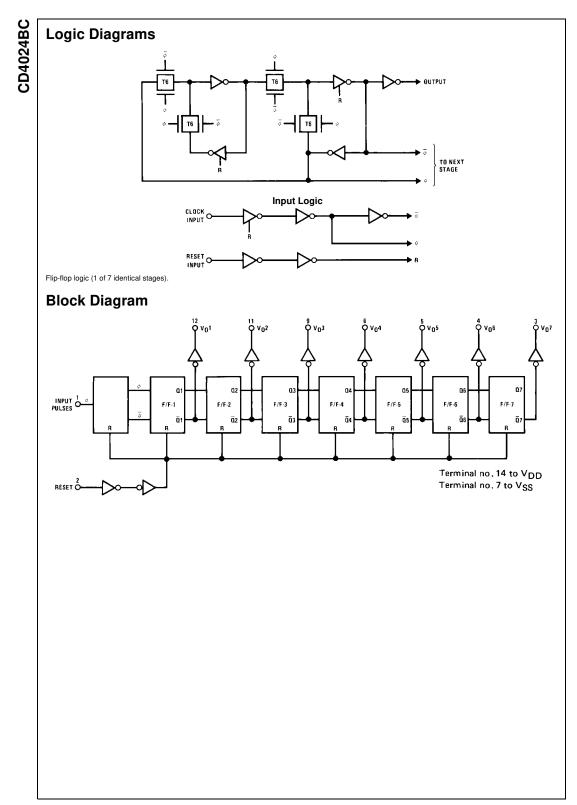

Absolute Maximum Ratings(Note 1)

-0.5 to $+18$ V _{DC}
–0.5 to V_DD +0.5 V_DC
$-65^{\circ}C$ to $+150^{\circ}C$
700 mW
500 mW
260°C

Recommended Operating

Conditions (Note 1)

DC Supply Voltage (V_{DD}) Input Voltage (V_{IN})

0 to V_{DD} V_{DC}

+3 to +15 V_{DC}

μA

٧

v

V

٧

mA

mΑ

μA

-55°C to +125°C Operating Temperature Range (T_A) Note 1: "Absolute Maximum Ratings" are those values beyond which the

safety of the device cannot be guaranteed, they are not meant to imply that the devices should be operated at these limits. The table of "Recom-

mended Operating Conditions" and "Electrical Characteristics" provides conditions for actual device operation.

Note 2: $V_{SS} = 0V$ unless otherwise specified.

DC Electrical Characteristics (Note 2) -55°C +25°C +125°C Symbol Conditions Parameter Units Min Max Min Max Min Тур Max $\overline{V_{DD}} = 5V$ I_{DD} Quiescent Device Current 5 0.3 5 150 $V_{DD} = 10V$ 10 0.5 10 300 V_{DD} = 15V 20 0.7 20 600 VOL LOW Level Output Voltage |l_O|<1 μA $V_{DD} = 5V$ 0.05 0 0.05 0.05 $V_{DD} = 10V$ 0.05 0 0.05 0.05 $V_{DD} = 15V$ 0.05 0 0.05 0.05 V_{OH} HIGH Level Output Voltage |l_O|<1 μA $V_{DD} = 5V$ 4 95 4 95 5 4 95 $V_{DD}=10V\,$ 9.95 9.95 9.95 10 $V_{DD} = 15V$ 14.95 14.95 14.95 15 VIL LOW Level Input Voltage |I_O|<1 μΑ $V_{DD} = 5V, V_O = 0.5V \text{ or } 4.5V$ 1.5 2 1.5 1.5 $V_{DD} = 10V, V_O = 1.0V \text{ or } 9.0V$ 3.0 3.0 3.0 4 $V_{DD} = 15V, V_O = 1.5V \text{ or } 13.5V$ 4.0 6 4.0 4.0 |l_O|<1 μA VIH HIGH Level Input Voltage $V_{DD} = 5V, V_O = 0.5V \text{ or } 4.5V$ 3.5 3.5 3 3.5 $V_{DD} = 10V, V_O = 1.0V \text{ or } 9.0V$ 7.0 7.0 6 7.0 $V_{DD} = 15V, V_O = 1.5V \text{ or } 13.5V$ 11.0 9 11.0 11.0 LOW Level Output Current $V_{DD} = 5V, V_{O} = 0.4V$ 0.64 0.51 0.88 0.36 I_{OL} (Note 3) $V_{DD} = 10V, V_{O} = 0.5V$ 1.6 1.3 2.25 0.9 $V_{DD} = 15V, V_O = 1.5V$ 4.2 3.4 8.8 2.4

-0.64

-1.6

-4.2

-0.51

-1.3

-3.4

-0.1

0.1

-0.88

-2.25

-8.8

-10-5

10⁻⁵

-0.1

0.1

-0.36

-0.9

-2.4

-1.0

1.0

 $V_{DD} = 5V, V_{O} = 4.6V$

 $V_{DD} = 10V, V_{O} = 9.5V$

 $V_{DD} = 15V, V_O = 13.5V$

 $V_{DD} = 15V, V_{IN} = 0V$

 $V_{DD} = 15V, V_{IN} = 15V$

Note 3: I_{OH} and I_{OL} are tested one output at a time.

HIGH Level Output Current

(Note 3)

Input Current

I_{OH}

I_{IN}

C
ш
4
2
0
4
Δ
C

AC Electrical Characteristics (Note 4)

Symbol	Parameter	Conditions	Min	Тур	Max	Units
t _{PHL} , t _{PLH}	Propagation Delay Time	$V_{DD} = 5V$		185	350	
	to Q1 Output	$V_{DD} = 10V$		85	125	ns
		$V_{DD} = 15V$		70	100	
t _{THL} , t _{TLH}	Transition Time	$V_{DD} = 5V$		100	200	
		$V_{DD} = 10V$		50	100	ns
		$V_{DD} = 15V$		40	80	
t _{WL} , t _{WH}	Minimum Input Pulse Width	$V_{DD} = 5V$		75	200	
		$V_{DD} = 10V$		40	110	ns
		$V_{DD} = 15V$		35	90	
t _{RCL} , t _{FCL}	Input Rise and Fall Time	$V_{DD} = 5V$			15	
		$V_{DD} = 10V$			10	μs
		$V_{DD} = 15V$			8	
f _{CL}	Maximum Input Pulse Frequency	$V_{DD} = 5V$	1.5	5		
		$V_{DD} = 10V$	4	12		MHz
		$V_{DD} = 15V$	5	15		
t _{PHL}	Reset Propagation Delay Time	$V_{DD} = 5V$		185	350	
		$V_{DD} = 10V$		85	125	ns
		$V_{DD} = 15V$		70	100	
t _{WH}	Reset Minimum Pulse Width	$V_{DD} = 5V$	İ	185	350	
		$V_{DD} = 10V$		85	125	ns
		$V_{DD} = 15V$		70	100	
C _{IN}	Input Capacitance (Note 5)	Any Input		5	7.5	pF

Note 4: AC Parameters are guaranteed by DC correlated testing. Note 5: Capacitance is guaranteed by periodic testing.

