

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



### Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China







# **CF-CA**

#### **Right Angle Tactile Switches**





**RoHS Compliant** 


#### Features

- 1. Right Angle Tactile Switch
- 2. Rich in Variation (Actuator Length, With/Without Support Terminal)
- 3. Silver-Plated / Gold-Plated Contacts
- 4. Resin Actuator


#### Specifications -


	Max.		1VA MAX (DC32V MAX50mA MAX)			
Rating	Min.	(Silver)	DC5V 1mA	٨		
		(Gold)	DC5V 10 μ	άA		
Initial contact resistance		100m Ω max.				
Dielectric strength			AC250V (50~60Hz) 1 minute			
Initial Insulation resistance			$100M\Omegamir$	า.	(DC100V)	
Stroke			0.25mm			
Operating force			3±1.5N {305±153g}			
Electrical life			MAX Rating 100,000 cycles.			
Operating	Operating temperature range			-40~+90°C		
Storage temperature range			-40~ <del>+</del> 90	0℃	•	

#### Part Numbering

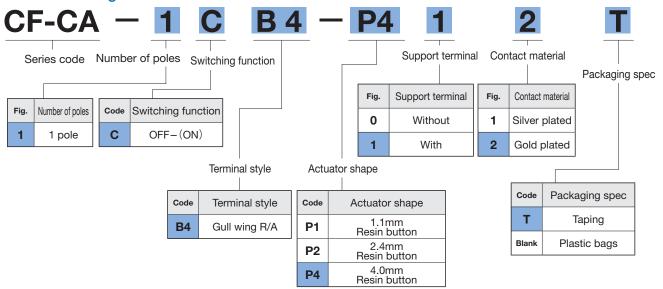

#### PC Hole Layouts








#### **Outline dimensions**

#### ●1.1 mm (Without Support Terminal)











Circuit Arr	angement	Circuit Discours
FREE	PUSH	Circuit Diagram
OFF	(ON)	
_	1)-2	0 2

#### ●1.1 mm (With Support Terminal)



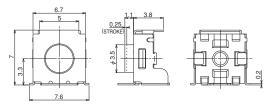





Circuit Arr	angement	Circuit Diagram			
FREE	PUSH	Circuit Diagram			
OFF	(ON)	_			
_	1)-2	0 -0 -2			

#### ●2.4mm (Without Support Terminal)



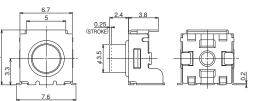





Circuit An	rangement	Oiit Di
FREE	PUSH	Circuit Diagram
OFF	(ON)	,
_	1)-2	1) -0 -2

#### ●2.4mm (With Support Terminal)




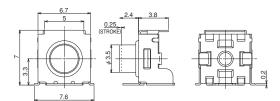





Circuit An	angement	Circuit Dingram	
FREE	PUSH	Circuit Diagram	
OFF	(ON)		
_	1)-2	① → ○ ②	

#### ●4.0mm (Without Support Terminal)

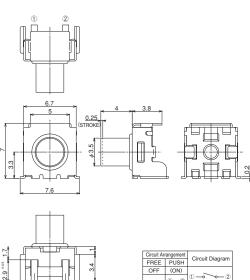

#### ●4.0mm (With Support Terminal)

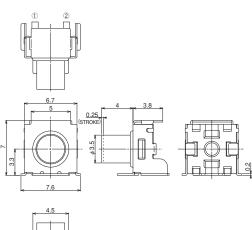




Circuit Arra	angement	Circuit Diagram	
FREE PUSH		Circuit Diagram	
OFF	(ON)	_	
_	0-2	0 - 2	

#### List of part numbers

		Contact material	Form of Packaging	Actuator shape		Terminal style		B
Number of poles	Switching function			Material	Hight	R/A Without support terminal	R/A With support terminal	Pieces in package
	e OFF-(ON)	Silver plated	Taping	Resin	1.1mm	CF-CA-1CB4-P101T	CF-CA-1CB4-P111T	500pcs./reel
					2.4mm	CF-CA-1CB4-P201T	CF-CA-1CB4-P211T	500pcs./reel
					4.0mm	CF-CA-1CB4-P401T	CF-CA-1CB4-P411T	500pcs./reel
			Plastic bags		1.1mm	CF-CA-1CB4-P101	CF-CA-1CB4-P111	20pcs./pack
					2.4mm	CF-CA-1CB4-P201	CF-CA-1CB4-P211	20pcs./pack
1					4.0mm	CF-CA-1CB4-P401	CF-CA-1CB4-P411	20pcs./pack
1 pole		Gold plated	Taping		1.1mm	CF-CA-1CB4-P102T	CF-CA-1CB4-P112T	500pcs./reel
					2.4mm	CF-CA-1CB4-P202T	CF-CA-1CB4-P212T	500pcs./reel
					4.0mm	CF-CA-1CB4-P402T	CF-CA-1CB4-P412T	500pcs./reel
			Plastic bags		1.1mm	CF-CA-1CB4-P102	CF-CA-1CB4-P112	20pcs./pack
					2.4mm	CF-CA-1CB4-P202	CF-CA-1CB4-P212	20pcs./pack
					4.0mm	CF-CA-1CB4-P402	CF-CA-1CB4-P412	20pcs./pack

#### **Soldering Specifications**

(1) Reflow Soldering

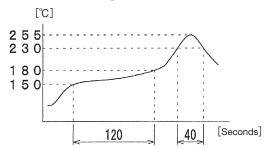

Apply reflow soldering up to 2 times max.

(2) Manual Soldering
Device: Soldering iron

 $350^{\circ}$ C  $\pm 10^{\circ}$ C, Max.; 3 seconds, Max.

#### Flux Cleaning

- (1) Solvent : Fluorine or Alcohol type
- (2) General cleaning is possible with these products, but pay attention to the following points:
  - Cleaning after soldering should be done after the PC board has cooled down to room temperature (30°C or below).
  - Some cleaning solvents may affect the material or the appearance of the switch. Test the cleaning solution with a sample before using in mass-production.


#### ■ Packaging Specification

#### (1)Taping


Packaging quantity is 500 pcs. per reel. Each reel is packed in a box.

The maximum number of consecutive missing pieces shall be two. The following illustration shows the leader length, empty portion and the product indication method.

Fig.1 Embossed tape dimensions

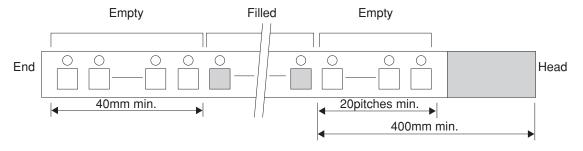


#### **(Tape dimensions)**

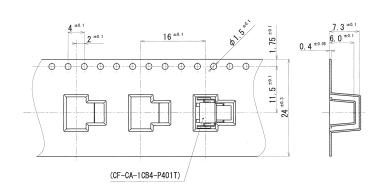

## (2) Bulk Packaging quantity is 20pcs per bag. Please order in increments of 20pcs.

#### (Reel dimensions)

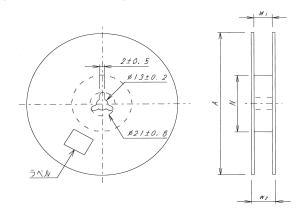

			Unit(mm)
Α	$W_1$	W <sub>1</sub>	N
φ 330±2	25.4±1	29.4±1	φ 80±1