

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China









High Pass Filter 50Ω BNC 10 MHz 7th Order



Part Number: CHPFL-0010-BNC

New BNC
New Filters
High Pass
High Pass
(A) E

High Pass
(A) PASS

Schematic
In/Out

In/Out

(65.79)

1.480

(37.59)

Features:

- 7th Order Chebyshev Response
- 50Ω BNC Connectors

Applications:

- Test Equipment
- Lab Use

Maximum Ratings:

- +36dBm (4 Watts)
- Operating Temperature: -40°C to 85°C
- Storage Temperature: -45°C to 90°C

Crystek's new line of BNC High Pass Filters are designed in a rugged BNC housing. This filter line has excellent out-of-band rejection.

BNC

Male

Designed for Test Equipment and General Lab Use.

Rev A
Page 1 of 3

0.550

(13.97)

 \bigcirc


BNC


Female





High Pass Filter CHPFL-0010-BNC

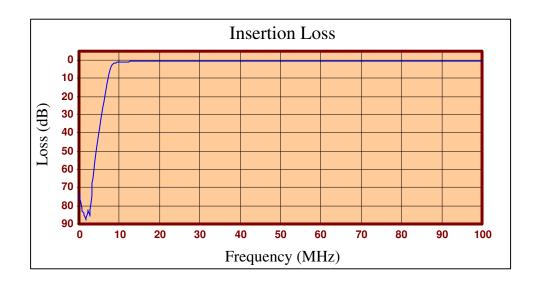

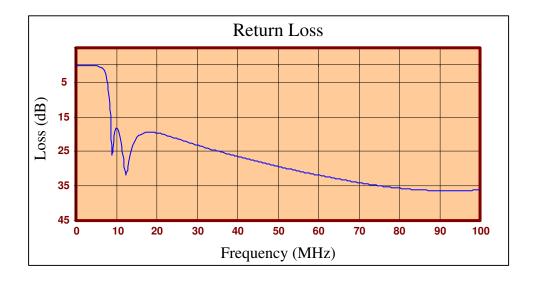

Rev A

Page 2 of 3





High Pass Filter CHPFL-0010-BNC

FREQ (MHz)	INSERTION LOSS (dB)	RETURN LOSS (dB)	
0.300	73.61	0.04	
0.799	82.66	0.04	
1.297	83.85	0.03	
1.796	87.70	0.03	
2.294	82.19	0.04	
2.793	84.86	0.05	
3.291	70.23	0.07	
3.790	59.76	0.10	
4.288	50.83	0.15	
4.787	42.99	0.21	
5.285	35.84	0.29	
5.784	29.12	0.41	
6.282	22.67	0.62	
6.781	16.42	1.02	
7.279	10.47	1.97	
7.778	5.50	4.61	
8.276	2.61	11.19	
8.775	1.61	25.82	
9.273	1.31	20.53	
9.772	1.17	18.14	
10.270	1.05	18.65	
10.769	0.95	20.61	
11.267	0.87	23.77	
12.264	0.75	31.88	
12.763	0.71	29.46	
13.261	0.67	26.19	
14.258	0.63	22.47	
14.757	0.61	21.43	
19.243	0.50 19.51		
26.222	0.40	21.75	
35.195	0.33	24.96	
40.180	0.31	26.55	
45.165	0.29	28.02	
56.132	0.27	30.94	
65.105	0.26	0.26 33.04	
75.075	0.25	34.95	
91.027	0.24	36.36	
100.000	0.24	36.14	

Dro	duc	+ ~	\ntr	\sim 1.
			,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	

i roddot oontrol.			
Crystek Part Number:	CHPFL-0010-BNC	Release Date:	09-Jul-2015
Revision Level:	Α	Responsible:	K. Piotrowicz

Rev A Page 3 of 3

