

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China









High Pass Filter 50Ω BNC 100 MHz 7th Order

Part Number: CHPFL-0100-BNC

New BNC
Rilters
High Pass Filters

Schematic In/Out In/Out

(65.79)

1.480

(37.59)

Features:

- 7th Order Chebyshev Response
- 50Ω BNC Connectors

Applications:

- Test Equipment
- Lab Use

Maximum Ratings:

• +36dBm (4 Watts)

• Operating Temperature: -40°C to 85°C

• Storage Temperature: -45°C to 90°C

Crystek's new line of BNC High Pass Filters are designed in a rugged BNC

BNC

Male

Designed for Test Equipment and General Lab Use.

Rev A Page 1 of 3

0.550

(13.97)

 \bigcirc

BNC


Female




housing. This filter line has excellent out-of-band rejection.



High Pass Filter CHPFL-0100-BNC

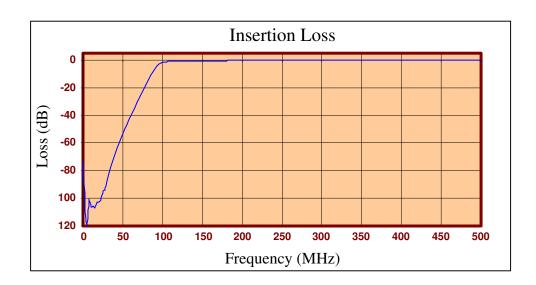

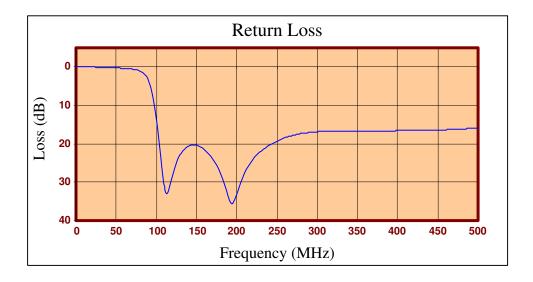

Rev A

Page 2 of 3





High Pass Filter CHPFL-0100-BNC

FREQ (MHz)	INSERTION LOSS (dB)	RETURN LOSS (dB)
0.300	73.85	0.03
2.799	102.62	0.00
5.297	120.51	0.00
7.796	101.07	0.00
10.294	106.67	0.00
12.793	105.75	0.01
15.291	107.04	0.01
20.288	102.99	0.03
22.787	101.39	0.04
25.285	94.70	0.05
30.282	87.39	0.07
32.781	81.82	0.08
35.279	76.94	0.10
40.276	68.48	0.14
42.775	64.32	0.16
45.273	60.57	0.18
50.270	53.35	0.24
52.769	49.93	0.27
55.267	46.66	0.30
60.264	40.27	0.38
65.261	34.17	0.48
70.258	28.24	0.62
72.757	25.31	0.70
95.243	3.14	7.76
100.240	1.73	14.52
105.237	1.22	23.48
112.733	0.94	33.04
130.222	0.68	22.60
145.213	0.58	20.29
175.195	0.42	25.64
195.183	0.36	35.53
207.676	0.34	28.81
225.165	0.33	22.95
280.132	0.33	17.37
325.105	0.32	16.65
375.075	0.32	16.63
455.027	0.32	16.39
500.000	0.36	15.90

Dro	duc	+ ~	\ntr	\sim 1.
			,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	

Crystek Part Number:	CHPFL-0100-BNC	Release Date:	09-Jul-2015
Revision Level:	Α	Responsible:	K. Piotrowicz

Rev A
Page 3 of 3

