



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



T-1 3/4 StatusPak™ Circuit Board Indicators

Description and Features

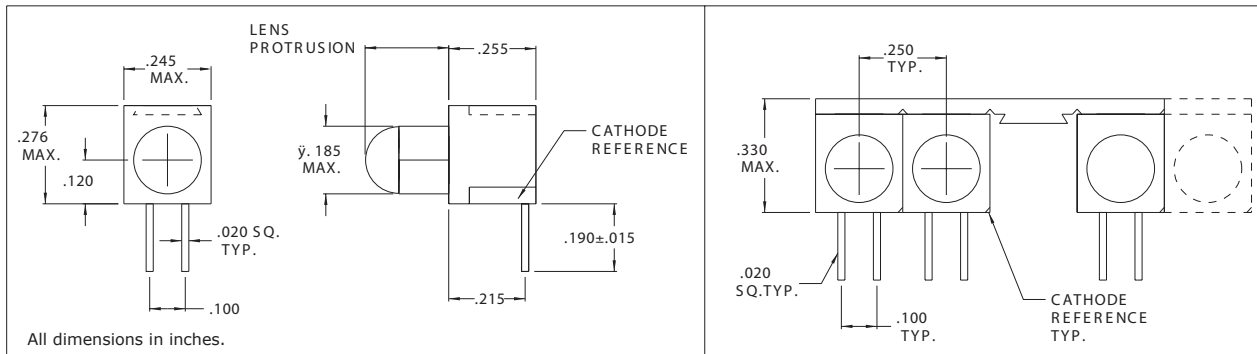

Electro-Optical Characteristics and Ratings

Printed Circuit Board assembly has been made faster and easier than ever before with StatusPak™ Circuit Board Indicators. These unique right angle LED indicators allow you to mount from one to ten positions in one easy step. T-1 3/4 StatusPaks™ can be customized to exact specifications requirements. You choose the number of LEDs, the color sequence and position of the LED. StatusPak™ is shipped to you in a one piece complete unit ready for PC mounting. StatusPak™ may be customized for your exact LED requirements if desired.

Refer to "Mounting Hole Pattern 1.pdf"

Part Number	Emitted Color	Lens Color	Package Type	Luminous Intensity		Forward Voltage		Viewing Angle (degrees)	Peak Wavelength (nm)
				Min. (mcd)	Typ. (mcd)	Typ. (V)	Max. (V)		
CM101S	Red	Red	Diffused	1.25	3.2	1.7	2.1	120	660
CM101G	H.E. Green	Green	Diffused	3.2	8.0	2.2	2.5	120	565
CM101Y	Yellow	Yellow	Diffused	3.2	8.0	2.1	2.5	120	590
CM101O	Orange	Orange	Diffused	3.2	8.0	2.0	2.5	120	625

How to order a Multi Position Assembly

- Determine the color combination you require:
S=Red
G=H.E.Green
Y=Yellow
X=Space
- Determine the number of positions you require including any open spaces.
(CML does not recommend assemblies of greater than ten positions.)

Example:

C M I - 0 5 - R X G G Y

Lens Type # of Positions LED Sequence