

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China










Vishay Semiconductors

## **Optocoupler, Phototransistor Output (Multichannel)**



#### **FEATURES**

- CNY74-2H, CNY74-4H TTL compatible
- Transfer ratio, 35 % typical
- Coupling capacitance, 0.5 pF
- · Dual and guad channel
- · Industry standard DIP packages
- Compliant to RoHS directive 2002/95/EC and in accordance to WEEE 2002/96/EC





### RoHS

### **AGENCY APPROVALS**

- UL1577, file no. E52744 system code H, double protection
- UL1577, file no. E52744, equivalent to CSA bulletin 5A

#### **DESCRIPTION**

The CNY74-2H, CNY74-4H is an optically coupled pair with a GaAlAs infrared LED and a silicon NPN phototransistor. Signal information, including a DC level, can be transmitted by the device while maintaining a high degree of electrical isolation between input and output.


The CNY74-2H, CNY74-4H is especially for driving medium-speed logic, where it may be used to eliminate troublesome ground loop and noise problems. Also it can be used to replace relays and transformers in many digital interface applications, as well as analog applications such as CTR modulation.

The CNY74-2H has two isolated channels in a single DIP package; the CNY74-4H has four isolated channels per package.

ORDER INFORMATION					
PART	REMARKS				
CNY74-2H	CTR 50 % to 600 %, dual channel DIP-8				
CNY74-4H	CTR 50 % to 600 %, quad channel DIP-16				

ABSOLUTE MAXIMUM RATINGS							
PARAMETER	TEST CONDITION	PART	SYMBOL	VALUE	UNIT		
INPUT							
Peak reverse voltage			$V_{R}$	3	V		
Forward continuous current			I <sub>F</sub>	60	mA		
Power dissipation			P <sub>diss</sub>	100	mW		
Derate linearly from 55 %				1.33	mW/°C		

## CNY74-2H, CNY74-4H





ABSOLUTE MAXIMUM RATINGS								
PARAMETER	TEST CONDITION	PART	SYMBOL	VALUE	UNIT			
OUTPUT								
Collector emitter breakdown voltage			BV <sub>CEO</sub>	70	V			
Emitter collector breakdown voltage			BV <sub>ECO</sub>	7	V			
Power dissipation			P <sub>diss</sub>	150	mW			
Derate linearly from 25 °C				2	mW/°C			
COUPLER								
Isolation test voltage	t = 1 s		V <sub>ISO</sub>	5300	$V_{RMS}$			
Isolation resistance	$V_{IO} = 500 \text{ V}, T_{amb} = 25 ^{\circ}\text{C}$		R <sub>IO</sub>	≥ 10 <sup>12</sup>	Ω			
isolation resistance	V <sub>IO</sub> = 500 V, T <sub>amb</sub> = 100 °C		R <sub>IO</sub>	≥ 10 <sup>11</sup>	Ω			
Tatal analysis of distant		CNY74-2H	P <sub>tot</sub>	400	mW			
Total package dissipation		CNY74-4H	P <sub>tot</sub>	500	mW			
Derate linearly from 25 °C		CNY74-2H		5.33	mW/°C			
Derate linearly norm 25°C		CNY74-4H		6.67	mW/°C			
Creepage distance				≥ 7	mm			
Clearance distance				≥ 7	mm			
Storage temperature			T <sub>stg</sub>	- 55 to + 150	°C			
Operating temperature			T <sub>amb</sub>	- 55 to + 100	°C			
Lead soldering time at 260 °C				10	S			

#### Note

 $T_{amb}$  = 25 °C, unless otherwise specified.

Stresses in excess of the absolute maximum ratings can cause permanent damage to the device. Functional operation of the device is not implied at these or any other conditions in excess of those given in the operational sections of this document. Exposure to absolute maximum ratings for extended periods of the time can adversely affect reliability.

ELECTRICAL CHARACTERISTICS							
PARAMETER	TEST CONDITION	SYMBOL	MIN.	TYP.	MAX.	UNIT	
INPUT							
Forward voltage	I <sub>F</sub> = 20 mA	V <sub>F</sub>		1.3	1.5	V	
Reverse current	V <sub>R</sub> = 3 V	I <sub>R</sub>		0.1	100	μΑ	
Capacitance	V <sub>R</sub> = 0 V	Co		25		pF	
OUTPUT							
Collector emitter breakdown voltage	I <sub>C</sub> = 1 mA	BV <sub>CEO</sub>	70			V	
Collector emitter leakage current	$V_{CE} = 5 \text{ V}, I_{F} = 0 \text{ A}$	I <sub>CEO</sub>			100	nA	
Capacitance collector emitter	V <sub>CE</sub> = 0 V, f = 1 Hz	C <sub>CE</sub>		10		pF	
COUPLER							
Saturation voltage, collector emitter	$I_C = 2 \text{ mA}, I_F = 16 \text{ mA}$	V <sub>CEsat</sub>		0.3	0.5	V	
Resistance (input to output)		R <sub>IO</sub>		100		GΩ	
Capacitance (input to output)		C <sub>IO</sub>		0.5		pF	

#### Note

 $T_{amb}$  = 25 °C, unless otherwise specified.

Minimum and maximum values are testing requirements. Typical values are characteristics of the device and are the result of engineering evaluation. Typical values are for information only and are not part of the testing requirements.

CURRENT TRANSFER RATIO							
PARAMETER	TEST CONDITION	SYMBOL	MIN.	TYP.	MAX.	UNIT	
DC current transfer ratio	$I_F = 5 \text{ mA}, V_{CE} = 5 \text{ V}$	CTR	50		600	%	
DC current transfer ratio	$I_F = 10 \text{ mA}, V_{CE} = 5 \text{ V}$	CTR	60			%	



# Optocoupler, Phototransistor Output Vishay Semiconductors (Multichannel)

SWITCHING CHARACTERISTICS						
PARAMETER	TEST CONDITION	SYMBOL	MIN.	TYP.	MAX.	UNIT
Delay time	$V_S = 5 \text{ V}, I_C = 2 \text{ mA}, R_L = 100 \Omega \text{ (see figure 1)}$	t <sub>d</sub>		3		μs
Rise time	$V_S = 5 \text{ V}, I_C = 2 \text{ mA}, R_L = 100 \Omega \text{ (see figure 1)}$	t <sub>r</sub>		3		μs
Fall time	$V_S = 5 \text{ V}, I_C = 2 \text{ mA}, R_L = 100 \Omega \text{ (see figure 1)}$	t <sub>f</sub>		4.7		μs
Storage time	$V_S = 5 \text{ V}, I_C = 2 \text{ mA}, R_L = 100 \Omega \text{ (see figure 1)}$	ts		0.3		μs
Turn-on time	$V_S = 5 \text{ V}, I_C = 2 \text{ mA}, R_L = 100 \Omega \text{ (see figure 1)}$	t <sub>on</sub>		6		μs
Turn-off time	$V_S = 5 \text{ V}, I_C = 2 \text{ mA}, R_L = 100 \Omega \text{ (see figure 1)}$	t <sub>off</sub>		5		μs
Turn-on time	$V_S = 5 \text{ V}$ , $I_C = 10 \text{ mA}$ , $R_L = 1 \text{ k}\Omega$ (see figure 2)	t <sub>on</sub>		9		μs
Turn-off time	$V_S = 5 \text{ V}, I_C = 10 \text{ mA}, R_L = 1 \text{ k}\Omega \text{ (see figure 2)}$	t <sub>off</sub>		18		μs




Fig. 1 - Test Circuit, Non-Saturated Operation




Fig. 3 - Switching Times




Fig. 2 - Test Circuit, Saturated Operation

# Vishay Semiconductors Optocoupler, Phototransistor Output (Multichannel)



#### **TYPICAL CHARACTERISTICS**

T<sub>amb</sub> = 25 °C, unless otherwise specified




Fig. 4 - Forward Voltage vs. Forward Current




Fig. 5 - Normalized Non-Saturated and Saturated CTR vs. LED Current




Fig. 6 - Normalized Non-Saturated and Saturated CTR vs. LED Current




Fig. 7 - Normalized Non-Saturated and Saturated CTR vs. LED Current




Fig. 8 - Normalized Non-Saturated and Saturated CTR vs. LED Current




Fig. 9 - Collector Emitter Current vs. Temperature and LED Current



# Optocoupler, Phototransistor Output Vishay Semiconductors (Multichannel)




Fig. 10 - Collector Emitter Leakage Current vs.Temperature




Fig. 13 - Normalized Photocurrent vs. I<sub>F</sub> and Temperature




Fig. 11 - Normalized CTR<sub>cb</sub> vs. LED Current and Temperature




Fig. 14 - Normalized Non-Saturated  $h_{\text{FE}}$  vs. Base Current and Temperature




Fig. 12 - Collector Base Photocurrent vs. LED Current




Fig. 15 - Normalized Saturated h<sub>FE</sub> vs. Base Current and Temperature

# Vishay Semiconductors Optocoupler, Phototransistor Output (Multichannel)







Fig. 16 - Propagation Delay vs. Collector Load Resistor


#### **PACKAGE DIMENSIONS** in millimeters



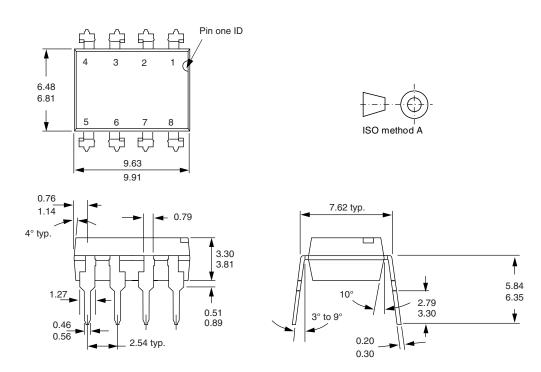

# Optocoupler, Phototransistor Output Vishay Semiconductors (Multichannel)

### **PACKAGE DIMENSIONS** in millimeters

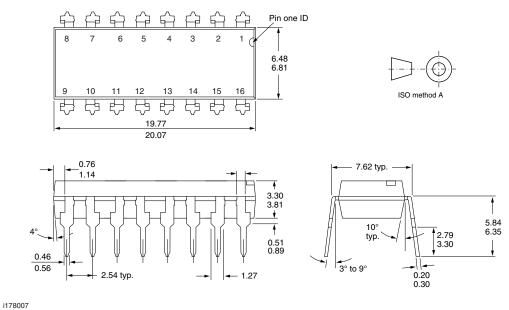

#### **PACKAGE MARKING**



#### Note

CNY74-2H and CNY74-4H are marked as CNY74-2 and CNY74-4 respectively.



### **Legal Disclaimer Notice**

Vishay

### **Disclaimer**

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.