# imall

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



# Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832 Email & Skype: info@chipsmall.com Web: www.chipsmall.com Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



# CREE 🔶

# Cree® XLamp® CXB1310 LED



#### **PRODUCT DESCRIPTION**

Cree CXB1310 High Density (HD) LED arrays are the next generation of high lumen density LED arrays. Incorporating elements of Cree's SC5 Technology™ Platform, the CXB1310 HD LED arrays deliver the most lumens in the industry for their light-emitting surface (LES) size, enabling radically new and differentiated LED lighting form factors for applications like tracks, lamps and downlights. The industry-leading performance of the CXB1310 HD LED arrays allows lighting manufacturers to develop compact, cutting edge products that deliver high performance and energy savings.

The CX Family LED Design Guide provides basic information on the requirements to use the CXB1310 HD LED array successfully in luminaire designs.

## **FEATURES**

- Available in 5-step EasyWhite<sup>®</sup> bins at 4000 K, 5000 K, 5700 K & 6500 K, 3-step EasyWhite bins at 2700 K, 3000 K, 3500 K, 4000 K & 5000 K and 2-step EasyWhite bins at 2700 K, 3000 K, 3500 K, & 4000 K CCT
- Available in 70-, 80- and 90-minimum CRI options
- Forward voltage options: 18-V class
  & 36-V class
- 85 °C binning and characterization
- Maximum drive current: 1400 mA (18 V), 700mA (36 V)
- 115° viewing angle, uniform chromaticity profile
- Top-side solder connections
- Thermocouple attach point
- NEMA SSL-3 2011 standard flux bins
- RoHS and REACh compliant
- UL<sup>®</sup> recognized component (E349212)

#### **TABLE OF CONTENTS**

| Characteristics                        | 2  |
|--|----|
| Operating Limits                       | 3  |
| Flux Characteristics, EasyWhite® Order |    |
| Codes and Bins - 18 V                  | 4  |
| Flux Characteristics, EasyWhite® Order |    |
| Codes and Bins - 36 V                  | 6  |
| Relative Spectral Power Distribution   | 8  |
| Electrical Characteristics             | 9  |
| Relative Luminous Flux                 | 10 |
| Typical Spatial Distribution           | 12 |
| Performance Groups - Brightness        | 12 |
| Performance Groups - Chromaticity      | 13 |
| Cree EasyWhite® Bins Plotted on the    |    |
| 1931 CIE Color Space                   | 14 |
| Bin and Order Code Formats             | 16 |
| Mechanical Dimensions                  | 16 |
| Thermal Design                         | 17 |
| Notes                                  | 19 |
| Packaging                              | 20 |



#### **CHARACTERISTICS**


| Characteristics                              | Unit    | Minimum | Typical | Maximum |
|--|---------|---------|---------|---------|
| Viewing angle (FWHM)                         | degrees |         | 115     |         |
| ESD withstand voltage (HBM per Mil-Std-883D) | V       |         |         | 8000    |
| DC forward current (18 V)                    | mA      |         |         | 1400*   |
| DC forward current (36 V)                    | mA      |         |         | 700*    |
| Reverse current                              | mA      |         |         | 0.1     |
| Forward voltage (18 V, @ 700 mA, 85 °C)      | V       |         | 16.5    | 18.5    |
| Forward voltage (36 V, @ 350 mA, 85 °C)      | V       |         | 33.0    | 37.0    |

\* Refer to the Operating Limits section.



### **OPERATING LIMITS**

The maximum current rating of the CXB1310 is dependent on the case temperature (Tc) when the LED has reached thermal equilibrium under steady-state operation. The graphs shown below assume that the system design employs good thermal management (thermal interface material and heat sink) and may vary when poor thermal management is employed. Please refer to the Mechanical Dimensions section on page 16 for the location of the Tc measurement point.

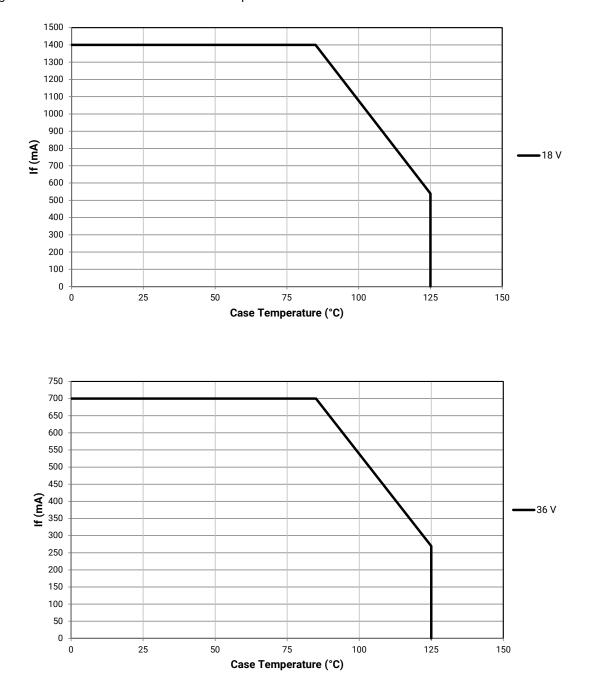

Copyright © 2016-2017 Cree, Inc. All rights reserved. The information in this document is subject to change without notice. Cree®, XLamp® and EasyWhite® are registered trademarks and SC5 Technology<sup>w</sup> and the Cree logo are trademarks of Cree, Inc. UL® and the UR logo are registered trademarks of UL LLC.



# FLUX CHARACTERISTICS, EASYWHITE<sup>®</sup> ORDER CODES AND BINS - 18 V ( $I_F$ = 700 mA, $T_J$ = 85 °C)

The following table provides order codes for XLamp CXB1310 LEDs. For a complete description of the order code nomenclature, please see the Bin and Order Code Formats section (page 16).

| Nominal | C    | <b>?</b>  * | Minir | num Lumin            | ous Flux               |                                      | 2-Step                       |                              | 3-S                          | tep                          |            |       | 5-Step                       |  |
|---------|------|-------------|-------|----------------------|------------------------|--------------------------------------|------------------------------|------------------------------|------------------------------|------------------------------|------------|-------|------------------------------|--|
| CCT     | Min  | Тур         | Group | Flux (lm)<br>@ 85 °C | Flux (lm)<br>@ 25 °C** | Group                                | Order Code                   | Group                        | Order Code                   | Group                        | Order Code | Group | Order Code                   |  |
|         | 70   |             | N2    | 1590                 | 1733                   |                                      |                              |                              |                              |                              |            | 65E   | CXB1310-0000-<br>000F0BN265E |  |
| 6500 K  | 70   |             | N4    | 1710                 | 1864                   |                                      |                              |                              |                              |                              |            | 03E   | CXB1310-0000-<br>000F0BN465E |  |
| 0300 K  | 80   |             | M4    | 1485                 | 1618                   |                                      |                              |                              |                              |                              |            | 65E   | CXB1310-0000-<br>000F0HM465E |  |
|         | 00   |             | N2    | 1590                 | 1733                   |                                      |                              |                              |                              |                              |            | UUL   | CXB1310-0000-<br>000F0HN265E |  |
|         | 70 - |             | N2    | 1590                 | 1733                   |                                      |                              |                              |                              |                              |            | 57E   | CXB1310-0000-<br>000F0BN257E |  |
| 5700 K  |      |             | N4    | 1710                 | 1864                   |                                      |                              |                              |                              |                              |            | 072   | CXB1310-0000-<br>000F0BN457E |  |
| 5700 K  | 80   | 80          | M4    | 1485                 | 1618                   |                                      |                              |                              |                              |                              |            | 57E   | CXB1310-0000-<br>000F0HM457E |  |
|         | 00   |             | N2    | 1590                 | 1733                   |                                      |                              |                              |                              |                              |            | 572   | CXB1310-0000-<br>000F0HN257E |  |
|         | 70   |             | N2    | 1590                 | 1733                   |                                      |                              |                              |                              |                              |            | 50E   | CXB1310-0000-<br>000F0BN250E |  |
|         | 70   |             | N4    | 1710                 | 1864                   |                                      |                              |                              |                              |                              |            |       | CXB1310-0000-<br>000F0BN450E |  |
| 5000 K  | 80   | 80          |       | M4                   | 1485                   | 1618                                 |                              |                              | 506                          | CXB1310-0000-<br>000F0HM450G |            |       |                              |  |
| 5000 K  | 00   |             | N2    | 1590                 | 1733                   |                                      |                              | 50G                          | CXB1310-0000-<br>000F0HN250G |                              |            |       |                              |  |
|         | 90   | 92          | K4    | 1290                 | 1406                   |                                      |                              | 50G                          | CXB1310-0000-<br>000F0UK450G |                              |            |       |                              |  |
|         | 50   | 52          | M2    | 1380                 | 1504                   |                                      |                              | 500                          | CXB1310-0000-<br>000F0UM250G |                              |            |       |                              |  |
|         | 70   |             | N2    | 1590                 | 1733                   |                                      |                              |                              |                              |                              |            | 40E   | CXB1310-0000-<br>000F0BN240E |  |
|         | 70   |             | N4    | 1710                 | 1864                   |                                      |                              |                              |                              |                              |            | HUL   | CXB1310-0000-<br>000F0BN440E |  |
| 4000 K  | 80   |             | M4    | 1485                 | 1618                   | 40H                                  | CXB1310-0000-<br>000F0HM440H | 40G                          | CXB1310-0000-<br>000F0HM440G |                              |            |       |                              |  |
| 1000 1  | К 80 |             | N2    | 1590                 | 1733                   | .011                                 | CXB1310-0000-<br>000F0HN240H |                              | CXB1310-0000-<br>000F0HN240G |                              |            |       |                              |  |
|         | 90   | 92          | К4    | 1290                 | 1406                   | 40H CXB1310-0000-<br>000F0UK440H 40G | 40G                          | CXB1310-0000-<br>000F0UK440G |                              |                              |            |       |                              |  |
|         | 20   |             | M2    | 1380                 | 1504                   |                                      | CXB1310-0000-<br>000F0UM240H | 400                          | CXB1310-0000-<br>000F0UM240G |                              |            |       |                              |  |

- Cree maintains a tolerance of ±7% on flux and power measurements, ±0.005 on chromaticity (CCx, CCy) measurements and a tolerance of ±2 on CRI measurements. See the Measurements section (page 19).
- Cree XLamp CXB1310 LED order codes specify only a minimum flux bin and not a maximum. Cree may ship reels in flux bins higher than the minimum specified by the order code without advance notice. Shipments will always adhere to the chromaticity bin restrictions specified by the order code.
- \* For 80 CRI minimum LEDs, CRI R9 minimum is 0 with a ±2 tolerance. For 90 CRI minimum LEDs, CRI R9 typical is 60.
- \*\* Flux values @ 25 °C are calculated and for reference only.

## FLUX CHARACTERISTICS, EASYWHITE<sup>®</sup> ORDER CODES AND BINS - 18 V (I<sub>F</sub> = 700 mA, T<sub>J</sub> = 85 °C) - CONTINUED

| Nominal | CF       | <b>XI</b> * | Minir | num Lumin            | ous Flux               |       | 2-Step                       |                              | 3-5                          | tep   |                              | 5-Step |            |  |  |
|---------|----------|-------------|-------|----------------------|------------------------|-------|------------------------------|------------------------------|------------------------------|-------|------------------------------|--------|------------|--|--|
| CCT     | Min      | Тур         | Group | Flux (lm)<br>@ 85 °C | Flux (lm)<br>@ 25 °C** | Group | Order Code                   | Group                        | Order Code                   | Group | Order Code                   | Group  | Order Code |  |  |
|         | 80       |             | M2    | 1380                 | 1504                   | 35H   | CXB1310-0000-<br>000F0HM235H | 35G                          | CXB1310-0000-<br>000F0HM235G |       |                              |        |            |  |  |
| 3500 K  | 00       |             | M4    | 1485                 | 1618                   | 330   | CXB1310-0000-<br>000F0HM435H | 300                          | CXB1310-0000-<br>000F0HM435G |       |                              |        |            |  |  |
| 3500 K  | 90       | 92          | K2    | 1200                 | 1308                   | 35H   | CXB1310-0000-<br>000F0UK235H |                              | CXB1310-0000-<br>000F0UK235G |       |                              |        |            |  |  |
|         | 90       | 5 92        | K4    | 1290                 | 1406                   | 301   | CXB1310-0000-<br>000F0UK435H | CXB1310-0000-<br>000F0UK435G |                              |       |                              |        |            |  |  |
|         | 80       |             | M2    | 1380                 | 1504                   | 30H   | CXB1310-0000-<br>000F0HM230H | 30G                          | CXB1310-0000-<br>000F0HM230G |       |                              |        |            |  |  |
|         |          |             | M4    | 1485                 | 1618                   | 300   | CXB1310-0000-<br>000F0HM430H |                              | CXB1310-0000-<br>000F0HM430G |       |                              |        |            |  |  |
| 3000 K  | 000 K 90 |             | J4    | 1120                 | 1221                   |       |                              | 300                          | CXB1310-0000-<br>000F0UJ430Q | 30U   | CXB1310-0000-<br>000F0UJ430U |        |            |  |  |
| 3000 K  | 90       |             | K2    | 1200                 | 1308                   |       |                              | 30Q                          | CXB1310-0000-<br>000F0UK230Q | 300   | CXB1310-0000-<br>000F0UK230U |        |            |  |  |
|         | 00       | 90          | 00    | 92                   | J4                     | 1120  | 1221                         | 30H                          | CXB1310-0000-<br>000F0UJ430H | 30G   | CXB1310-0000-<br>000F0UJ430G |        |            |  |  |
|         | 90       | 92          | K2    | 1200                 | 1308                   | 3011  | CXB1310-0000-<br>000F0UK230H | 300                          | CXB1310-0000-<br>000F0UK230G |       |                              |        |            |  |  |
|         | 90       |             | K4    | 1290                 | 1406                   | 27H   | CXB1310-0000-<br>000F0HK427H | 27G                          | CXB1310-0000-<br>000F0HK427G |       |                              |        |            |  |  |
| 2700 K  | 80       |             | M2    | 1380                 | 1504                   | 2711  | CXB1310-0000-<br>000F0HM227H | 276                          | CXB1310-0000-<br>000F0HM227G |       |                              |        |            |  |  |
| 2700 K  | к        | 0 92        | J4    | 1120                 | 1221                   | 27H   | CXB1310-0000-<br>000F0UJ427H | 27G                          | CXB1310-0000-<br>000F0UJ427G |       |                              |        |            |  |  |
|         | 50       | 92          | K2    | 1200                 | 1308                   | 2/11  | CXB1310-0000-<br>000F0UK227H | 270                          | CXB1310-0000-<br>000F0UK227G |       |                              |        |            |  |  |

- Cree maintains a tolerance of ±7% on flux and power measurements, ±0.005 on chromaticity (CCx, CCy) measurements and a tolerance of ±2 on CRI measurements. See the Measurements section (page 19).
- Cree XLamp CXB1310 LED order codes specify only a minimum flux bin and not a maximum. Cree may ship reels in flux bins higher than the minimum specified by the order code without advance notice. Shipments will always adhere to the chromaticity bin restrictions specified by the order code.
- \* For 80 CRI minimum LEDs, CRI R9 minimum is 0 with a ±2 tolerance. For 90 CRI minimum LEDs, CRI R9 typical is 60.
- \*\* Flux values @ 25 °C are calculated and for reference only.



# FLUX CHARACTERISTICS, EASYWHITE<sup>®</sup> ORDER CODES AND BINS - 36 V ( $I_F$ = 350 mA, $T_J$ = 85 °C)

The following table provides order codes for XLamp CXB1310 LEDs. For a complete description of the order code nomenclature, please see the Bin and Order Code Formats section (page 16).

| Nominal | C       | RI* | Minin | num Lumin            | ous Flux               |       | 2-Step                       |       | 3-S                          | tep                          |            |       | 5-Step                       |  |
|---------|---------|-----|-------|----------------------|------------------------|-------|------------------------------|-------|------------------------------|------------------------------|------------|-------|------------------------------|--|
| CCT     | Min     | Тур | Group | Flux (lm)<br>@ 85 °C | Flux (lm)<br>@ 25 °C** | Group | Order Code                   | Group | Order Code                   | Group                        | Order Code | Group | Order Code                   |  |
|         | 70      |     | N2    | 1590                 | 1733                   |       |                              |       |                              |                              |            | 65E   | CXB1310-0000-<br>000N0BN265E |  |
| 6500 K  | 70      |     | N4    | 1710                 | 1864                   |       |                              |       |                              |                              |            | 03E   | CXB1310-0000-<br>000N0BN465E |  |
| 0000 K  | 80      |     | M4    | 1485                 | 1618                   |       |                              |       |                              |                              |            | 65E   | CXB1310-0000-<br>000N0HM465E |  |
|         | 00      |     | N2    | 1590                 | 1733                   |       |                              |       |                              |                              |            | UUL   | CXB1310-0000-<br>000N0HN265E |  |
|         | 70      |     | N2    | 1590                 | 1733                   |       |                              |       |                              |                              |            | 57E   | CXB1310-0000-<br>000N0BN257E |  |
| 5700 K  | 70      |     | N4    | 1710                 | 1864                   |       |                              |       |                              |                              |            | 572   | CXB1310-0000-<br>000N0BN457E |  |
| 5700 K  | 80      |     | M4    | 1485                 | 1618                   |       |                              |       |                              |                              |            | 57E   | CXB1310-0000-<br>000N0HM457E |  |
|         | 80      |     | N2    | 1590                 | 1733                   |       |                              |       |                              |                              |            | J/L   | CXB1310-0000-<br>000N0HN257E |  |
|         | 70      |     | N2    | 1590                 | 1733                   |       |                              |       |                              |                              |            | 50E   | CXB1310-0000-<br>000N0BN250E |  |
|         |         |     | N4    | 1710                 | 1864                   |       |                              |       |                              |                              |            | JUL   | CXB1310-0000-<br>000N0BN450E |  |
| 5000 K  | 80      | 80  |       | M4                   | 1485                   | 1618  |                              |       | 506                          | CXB1310-0000-<br>000N0HM450G |            |       |                              |  |
| 5000 K  |         |     | N2    | 1590                 | 1733                   |       |                              | 50G   | CXB1310-0000-<br>000N0HN250G |                              |            |       |                              |  |
|         | 90      | 92  | K4    | 1290                 | 1406                   |       |                              | 50G   | CXB1310-0000-<br>000N0UK450G |                              |            |       |                              |  |
|         | 50      | 52  | M2    | 1380                 | 1504                   |       |                              | 500   | CXB1310-0000-<br>000N0UM250G |                              |            |       |                              |  |
|         | 70      |     | N2    | 1590                 | 1733                   |       |                              |       |                              |                              |            | 40E   | CXB1310-0000-<br>000N0BN240E |  |
|         | /0      |     | N4    | 1710                 | 1864                   |       |                              |       |                              |                              |            | HUL   | CXB1310-0000-<br>000N0BN440E |  |
| 4000 K  | 80      |     | M4    | 1485                 | 1618                   | 40H   | CXB1310-0000-<br>000N0HM440H | 40G   | CXB1310-0000-<br>000N0HM440G |                              |            |       |                              |  |
| 4000 K  | 00 K 80 |     | N2    | 1590                 | 1733                   |       | CXB1310-0000-<br>000N0HN240H | 400   | CXB1310-0000-<br>000N0HN240G |                              |            |       |                              |  |
|         | 90      | 92  | K4    | 1290                 | 1406                   | 40H   | CXB1310-0000-<br>000N0UK440H | 40G   | CXB1310-0000-<br>000N0UK440G |                              |            |       |                              |  |
|         | 50      | 72  | M2    | 1380                 | 1504                   |       | CXB1310-0000-<br>000N0UM240H | 400   | CXB1310-0000-<br>000N0UM240G |                              |            |       |                              |  |

- Cree maintains a tolerance of ±7% on flux and power measurements, ±0.005 on chromaticity (CCx, CCy) measurements and a tolerance of ±2 on CRI measurements. See the Measurements section (page 19).
- Cree XLamp CXB1310 LED order codes specify only a minimum flux bin and not a maximum. Cree may ship reels in flux bins higher than the minimum specified by the order code without advance notice. Shipments will always adhere to the chromaticity bin restrictions specified by the order code.
- \* For 80 CRI minimum LEDs, CRI R9 minimum is 0 with a ±2 tolerance. For 90 CRI minimum LEDs, CRI R9 typical is 60.
- \*\* Flux values @ 25 °C are calculated and for reference only.

# FLUX CHARACTERISTICS, EASYWHITE<sup>®</sup> ORDER CODES AND BINS - 36 V (I<sub>F</sub> = 350 mA, T<sub>J</sub> = 85 °C) - CONTINUED


| Nominal | CF           | <b>{ </b> * | Minir | num Lumin            | ous Flux               | 2-Step |                              |       | 3-Step                       |       |                              |       | 5-Step     |  |
|---------|--------------|-------------|-------|----------------------|------------------------|--------|------------------------------|-------|------------------------------|-------|------------------------------|-------|------------|--|
| CCT     | Min          | Тур         | Group | Flux (lm)<br>@ 85 °C | Flux (lm)<br>@ 25 °C** | Group  | Order Code                   | Group | Order Code                   | Group | Order Code                   | Group | Order Code |  |
|         | 80           |             | M2    | 1380                 | 1504                   | 35H    | CXB1310-0000-<br>000N0HM235H | 35G   | CXB1310-0000-<br>000N0HM235G |       |                              |       |            |  |
| 3500 K  | 80           |             | M4    | 1485                 | 1618                   | 330    | CXB1310-0000-<br>000N0HM435H | 300   | CXB1310-0000-<br>000N0HM435G |       |                              |       |            |  |
| 3300 K  | 90           | 92          | K2    | 1200                 | 1308                   | 35H    | CXB1310-0000-<br>000N0UK235H |       | CXB1310-0000-<br>000N0UK235G |       |                              |       |            |  |
|         | 90           | 52          | K4    | 1290                 | 1406                   | 330    | CXB1310-0000-<br>000N0UK435H | 35G   | CXB1310-0000-<br>000N0UK435G |       |                              |       |            |  |
|         | 80           | )           | M2    | 1380                 | 1504                   | 30H    | CXB1310-0000-<br>000N0HM230H | 30G   | CXB1310-0000-<br>000N0HM230G |       |                              |       |            |  |
|         |              |             | M4    | 1485                 | 1618                   | 3011   | CXB1310-0000-<br>000N0HM430H |       | CXB1310-0000-<br>000N0HM430G |       |                              |       |            |  |
| 3000 K  | 00 K 90      | ) 92        | J4    | 1120                 | 1221                   |        |                              | 300   | CXB1310-0000-<br>000N0UJ430Q | 30U   | CXB1310-0000-<br>000N0UJ430U |       |            |  |
| 3000 K  | 50           | 52          | K2    | 1200                 | 1308                   |        |                              | 300   | CXB1310-0000-<br>000N0UK230Q | 300   | CXB1310-0000-<br>000N0UK230U |       |            |  |
|         | 90 93        | 92          | J4    | 1120                 | 1221                   |        | CXB1310-0000-<br>000N0UJ430H | 30G   | CXB1310-0000-<br>000N0UJ430G |       |                              |       |            |  |
|         | 90           | 92          | K2    | 1200                 | 1308                   | 3011   | CXB1310-0000-<br>000N0UK230H | 300   | CXB1310-0000-<br>000N0UK230G |       |                              |       |            |  |
|         | 80           |             | K4    | 1290                 | 1406                   | 27H    | CXB1310-0000-<br>000N0HK427H | 27G   | CXB1310-0000-<br>000N0HK427G |       |                              |       |            |  |
| 2700 K  | 80<br>2700 K |             | M2    | 1380                 | 1504                   | 2711   | CXB1310-0000-<br>000N0HM227H | 270   | CXB1310-0000-<br>000N0HM227G |       |                              |       |            |  |
| 2700 K  | к <u>90</u>  | 0 92        | J4    | 1120                 | 1221                   | 27H    | CXB1310-0000-<br>000N0UJ427H | 27G   | CXB1310-0000-<br>000N0UJ427G |       |                              |       |            |  |
|         | 50           | 52          | K2    | 1200                 | 1308                   | 2711   | CXB1310-0000-<br>000N0UK227H | 270   | CXB1310-0000-<br>000N0UK227G |       |                              |       |            |  |

- Cree maintains a tolerance of ±7% on flux and power measurements, ±0.005 on chromaticity (CCx, CCy) measurements and a tolerance of ±2 on CRI measurements. See the Measurements section (page 19).
- Cree XLamp CXB1310 LED order codes specify only a minimum flux bin and not a maximum. Cree may ship reels in flux bins higher than the minimum specified by the order code without advance notice. Shipments will always adhere to the chromaticity bin restrictions specified by the order code.
- \* For 80 CRI minimum LEDs, CRI R9 minimum is 0 with a ±2 tolerance. For 90 CRI minimum LEDs, CRI R9 typical is 60.
- \*\* Flux values @ 25 °C are calculated and for reference only.

# **Relative Spectral Power Distribution**

RELATIVE SPECTRAL POWER DISTRIBUTION (18 V, I<sub>F</sub> = 700 mA; 36 V, I<sub>F</sub> = 350 mA, T<sub>J</sub> = 85 °C)

The following graphs are the result of a series of pulsed measurements at 350 mA for the 18-V CXB1310 LED and 700 mA for the 36-V CXB1310 LED and  $T_1 = 85$  °C.

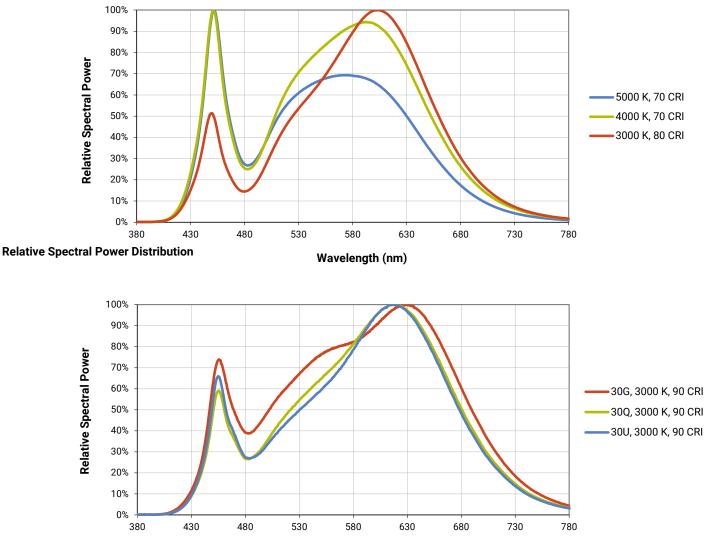


Wavelength (nm)

CREE 🚖

# **ELECTRICAL CHARACTERISTICS**

The following graph is the result of a series of steady-state measurements.

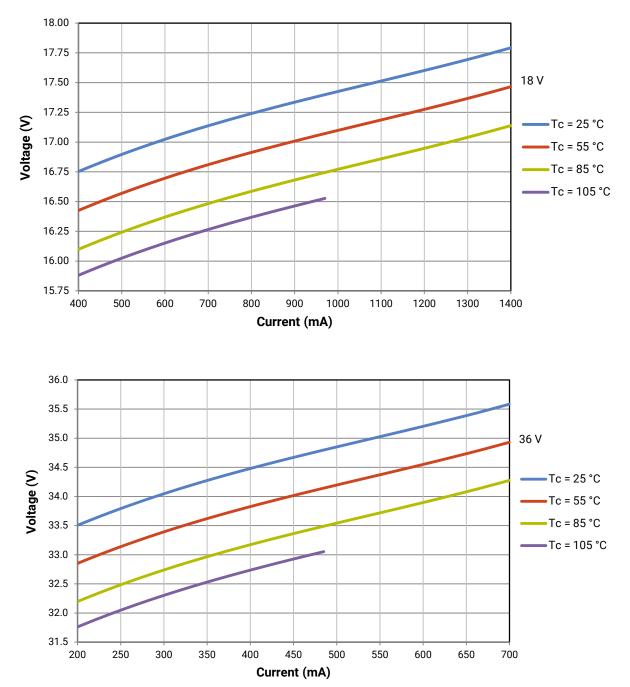




## **RELATIVE LUMINOUS FLUX**

The relative luminous flux values provided below are the ratio of:

- · Measurements of CXB1310 at steady-state operation at the given conditions, divided by
- Flux measured during binning, which is a pulsed measurement at 700 mA at T<sub>J</sub> = 85 °C for the 18-V CXB1310 LED.

For example, at steady-state operation of Tc = 55 °C,  $I_F = 1000$  mA, the relative luminous flux ratio is 140% in the chart below. An 18-V CXB1310 LED that measures 1200 lm during binning will deliver 1680 lm (1200 \* 1.4) at steady-state operation of Tc = 55 °C,  $I_F = 1000$  mA.

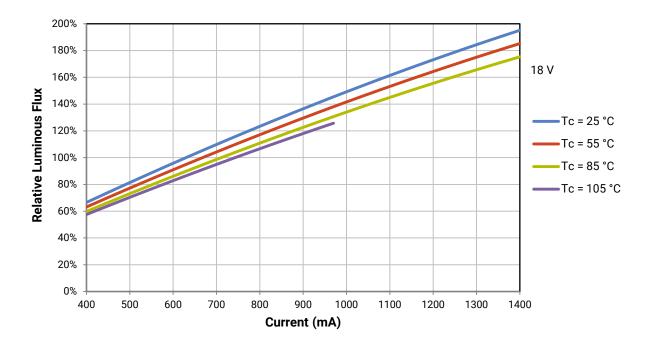


#### **RELATIVE LUMINOUS FLUX - CONTINUED**

The relative luminous flux values provided below are the ratio of:


- · Measurements of CXB1310 at steady-state operation at the given conditions, divided by
- Flux measured during binning, which is a pulsed measurement at 350 mA at T<sub>J</sub> = 85 °C for the 36-V CXB1310 LED.

For example, at steady-state operation of Tc = 55 °C,  $I_F = 500$  mA, the relative luminous flux ratio is 140% in the chart below. A 36-V CXB1310 LED that measures 1200 lm during binning will deliver 1680 lm (1200 \* 1.4) at steady-state operation of Tc = 55 °C,  $I_F = 500$  mA.

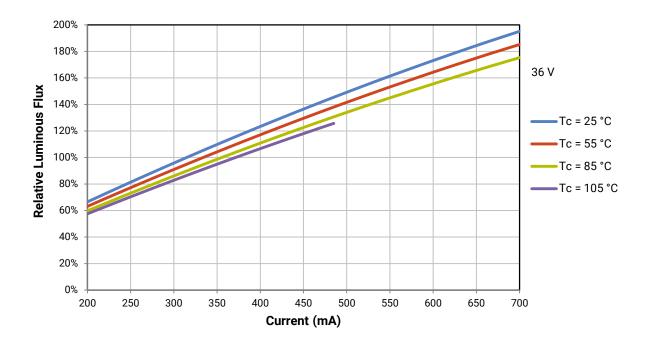



## **TYPICAL SPATIAL DISTRIBUTION**

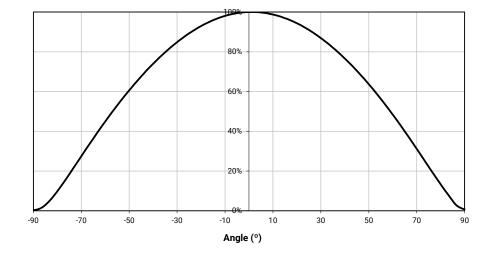

# PERFORMANCE GROUPS - BRIGHTNESS (18 V, $I_F = 700 \text{ mA}$ ; 36 V, $I_F = 350 \text{ mA}$ , $T_J = 85 \text{ °C}$ )

XLamp CXB1310 LEDs are tested for luminous flux and placed into one of the following bins.

| Group Code | Minimum Luminous Flux | Maximum Luminous Flux |
|------------|-----------------------|-----------------------|
| J2         | 1040                  | 1120                  |
| J4         | 1120                  | 1200                  |
| К2         | 1200                  | 1290                  |
| K4         | 1290                  | 1380                  |
| M2         | 1380                  | 1485                  |
| M4         | 1485                  | 1590                  |
| N2         | 1590                  | 1710                  |
| N4         | 1710                  | 1830                  |
| P2         | 1830                  | 1965                  |



# **PERFORMANCE GROUPS - CHROMATICITY (T<sub>J</sub> = 85 °C)**

XLamp CXB1310 LEDs are tested for chromaticity and placed into one of the regions defined by the following bounding coordinates.

| EasyV | Vhite Color Ter | nperatures – 2 | -Step  |
|-------|-----------------|----------------|--------|
| Code  | ССТ             | x              | у      |
|       |                 | 0.3777         | 0.3739 |
| 40H   | 4000 K          | 0.3797         | 0.3816 |
| 4011  | 4000 K          | 0.3861         | 0.3855 |
|       |                 | 0.3838         | 0.3777 |
|       |                 | 0.4022         | 0.3858 |
| 35H   | 3500 K          | 0.4053         | 0.3942 |
| 300   | 3300 K          | 0.4125         | 0.3977 |
|       |                 | 0.4091         | 0.3891 |
|       |                 | 0.4287         | 0.3975 |
| 30H   | 3000 K          | 0.4328         | 0.4064 |
| 300   | 3000 K          | 0.4390         | 0.4086 |
|       |                 | 0.4347         | 0.3996 |
|       |                 | 0.4524         | 0.4048 |
| 27H   | 2700 K          | 0.4574         | 0.4140 |
| 2/11  | 2700 K          | 0.4633         | 0.4154 |
|       |                 | 0.4581         | 0.4062 |


|          | EasyWhite Color Temperatures – 3-Step Ellipse |        |        |            |            |                |  |  |  |  |  |  |
|----------|---|--------|--------|------------|------------|----------------|--|--|--|--|--|--|
| Bin Code | ССТ   | Center | Point  | Major Axis | Minor Axis | Rotation Angle |  |  |  |  |  |  |
| Bin Code | CCI   | x      | У      | а          | b          | (°)            |  |  |  |  |  |  |
| 50G      | 5000 K  | 0.3447 | 0.3553 | 0.00840    | 0.00312    | 65.0           |  |  |  |  |  |  |
| 40G      | 4000 K  | 0.3818 | 0.3797 | 0.00939    | 0.00402    | 53.7           |  |  |  |  |  |  |
| 35G      | 3500 K  | 0.4073 | 0.3917 | 0.00927    | 0.00414    | 54.0           |  |  |  |  |  |  |
| 30G      | 3000 K  | 0.4338 | 0.4030 | 0.00834    | 0.00408    | 53.2           |  |  |  |  |  |  |
| 30Q      | 3000 K  | 0.4305 | 0.3935 | 0.00834    | 0.00408    | 53.2           |  |  |  |  |  |  |
| 30U      | 3000 K  | 0.4274 | 0.3837 | 0.00834    | 0.00408    | 53.2           |  |  |  |  |  |  |
| 27G      | 2700 K  | 0.4577 | 0.4099 | 0.00834    | 0.00420    | 48.5           |  |  |  |  |  |  |

|          | EasyWhite Color Temperatures – 5-Step Ellipse |        |         |            |            |                |  |  |  |  |  |  |
|----------|---|--------|---------|------------|------------|----------------|--|--|--|--|--|--|
| Dia Orda | сст   | Cente  | r Point | Major Axis | Minor Axis | Rotation Angle |  |  |  |  |  |  |
| Bin Code | CCI   | x      | У       | а          | b          | (°)            |  |  |  |  |  |  |
| 65E      | 6500 K  | 0.3123 | 0.3282  | 0.01110    | 0.00550    | 61.0           |  |  |  |  |  |  |
| 57E      | 5700 K  | 0.3287 | 0.3417  | 0.01230    | 0.00600    | 72.0           |  |  |  |  |  |  |
| 50E      | 5000 K  | 0.3447 | 0.3553  | 0.01400    | 0.00520    | 65.0           |  |  |  |  |  |  |
| 40E      | 4000 K  | 0.3818 | 0.3797  | 0.01565    | 0.00670    | 53.7           |  |  |  |  |  |  |

XLAMP<sup>®</sup> CXB1310 LED




# CREE EASYWHITE® BINS PLOTTED ON THE 1931 CIE COLOR SPACE (T<sub>j</sub> = 85 °C)

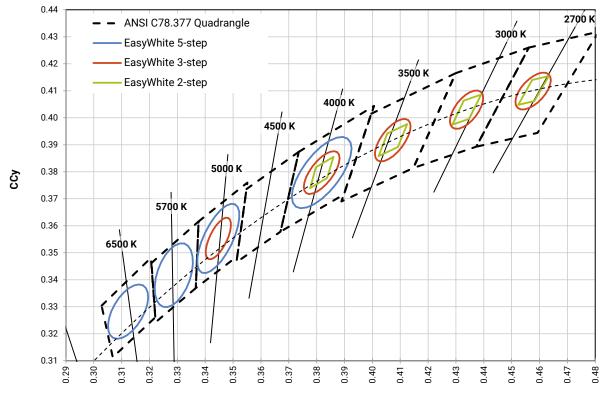

CCx



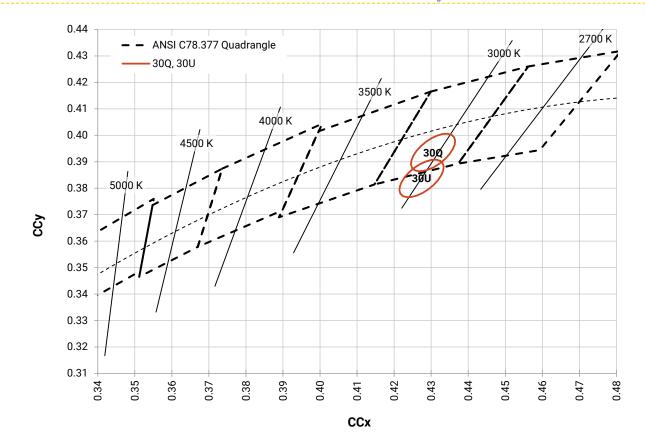


#### CREE EASYWHITE® BINS PLOTTED ON THE 1931 CIE COLOR SPACE (T, = 85 °C) - CONTINUED


CREE 🚖

#### **BIN AND ORDER CODE FORMATS**

Bin codes and order codes are configured as follows:

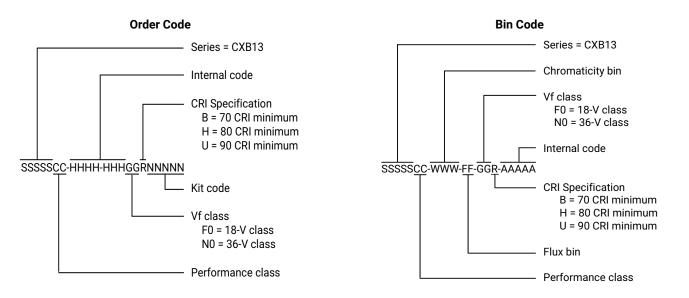

#### **MECHANICAL DIMENSIONS**

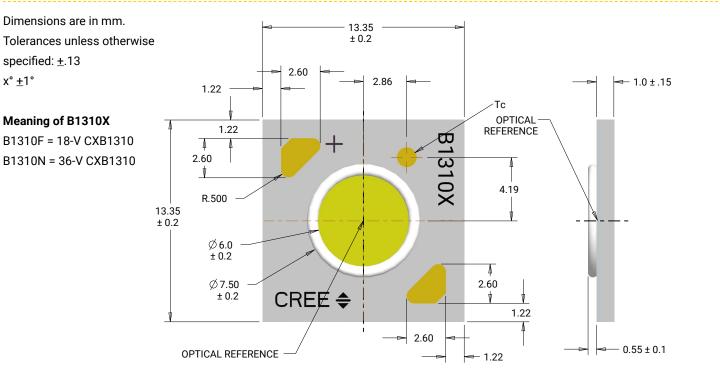


#### THERMAL DESIGN


The CXB family of LED arrays can include over a hundred different LED die inside one package, and thus over a hundred different junction temperatures ( $T_j$ ). Cree has intentionally removed junction-temperature-based operating limits and replaced the commonplace maximum  $T_j$  calculations with maximum ratings based on forward current ( $I_F$ ) and case temperature (Tc). No additional calculations are required to ensure the CXB LED is being operated within its designed limits. Please refer to page 15 for the Operating Limit specification.

There is no need to calculate for  $T_J$  inside the package, as the thermal management design process, specifically from  $T_{sP}$  to ambient ( $T_a$ ), remains identical to any other LED component. For more information on thermal management of Cree XLamp LEDs, please refer to the Thermal Management application note. For CXB soldering recommendations and more information on thermal interface materials (TIM) and connection methods, please refer to the Cree XLamp CX Family LEDs soldering and handling document. The CX Family LED Design Guide provides basic information on the requirements to use Cree XLamp CXB LEDs successfully in luminaire designs.

To keep the CXB1310 LED at or below the maximum rated Tc, the case to ambient temperature thermal resistance (R\_c-a) must be at or below the maximum R\_c-a value shown on the following graphs, depending on the operating environment. The y-axis in the graph is a base 10 logarithmic scale.




As the figure at right shows, the R\_c-a value is the sum of the thermal resistance of the TIM (R\_tim) plus the thermal resistance of the heat sink (R\_hs).

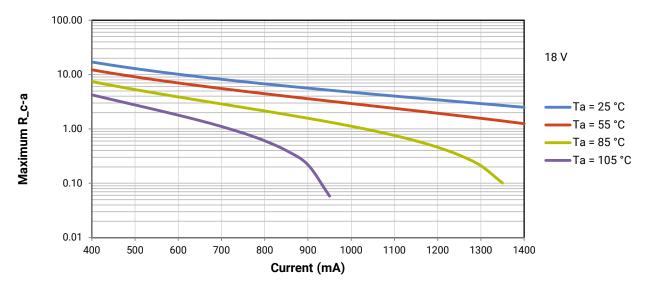



### **THERMAL DESIGN - CONTINUED**

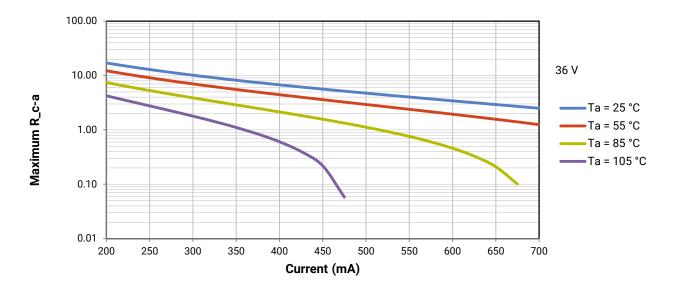

#### **NOTES**

#### Measurements

The luminous flux, radiant power, chromaticity, forward voltage and CRI measurements in this document are binning specifications only and solely represent product measurements as of the date of shipment. These measurements will change over time based on a number of factors that are not within Cree's control and are not intended or provided as operational specifications for the products. Calculated values are provided for informational purposes only and are not intended as specifications.

#### **Pre-Release Qualification Testing**

Please read the LED Reliability Overview for details of the qualification process Cree applies to ensure long-term reliability for XLamp LEDs and details of Cree's pre-release qualification testing for XLamp LEDs.

#### Lumen Maintenance

Cree now uses standardized IES LM-80-08 and TM-21-11 methods for collecting long-term data and extrapolating LED lumen maintenance. For information on the specific LM-80 data sets available for this LED, refer to the public LM-80 results document.

Please read the Long-Term Lumen Maintenance application note for more details on Cree's lumen maintenance testing and forecasting. Please read the Thermal Management application note for details on how thermal design, ambient temperature, and drive current affect the LED junction temperature.

#### **RoHS Compliance**

The levels of RoHS restricted materials in this product are below the maximum concentration values (also referred to as the threshold limits) permitted for such substances, or are used in an exempted application, in accordance with EU Directive 2011/65/EC (RoHS2), as implemented January 2, 2013. RoHS Declarations for this product can be obtained from your Cree representative or from the Product Ecology section of the Cree website.

#### **REACh Compliance**

REACh substances of very high concern (SVHCs) information is available for this product. Since the European Chemical Agency (ECHA) has published notice of their intent to frequently revise the SVHC listing for the foreseeable future, please contact a Cree representative to insure you get the most up-to-date REACh Declaration. REACh banned substance information (REACh Article 67) is also available upon request.

#### **UL® Recognized Component**

Level 4 enclosure consideration. The LED package or a portion thereof has been investigated as a fire and electrical enclosure per ANSI/ UL 8750.

#### Vision Advisory

WARNING: Do not look at an exposed lamp in operation. Eye injury can result. For more information about LEDs and eye safety, please refer to the LED Eye Safety application note.

#### PACKAGING

Cree CXB1310 LEDs are packaged in trays of 20. Five trays are sealed in an anti-static bag and placed inside a carton, for a total of 100 LEDs per carton. Each carton contains 100 LEDs from the same performance bin.

Dimensions are in inches. Tolerances:  $\pm$ .13 x°  $\pm$ 1°

