

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China









Diode array

Features

- Array of 8 or 12 diodes
- Low input capacitance
- Suitable for digital line protection

Complies with following standards:

- IEC 61000-4-2 Level 4
 - 15kV (air discharge)
 - 8kV (contact discharge)

Applications

- Protection of logic side of ISDN S-interface
- Protection of I/O lines of microcontroller
- Signal conditioning

Description

Array of 8 or 12 diodes configured by cells of 2 diodes, each cell being used to protect signal line from transient overvoltages by clamping action.

As maximum voltage of each diode is 18 V, maximum input voltage range between two I/Os is either 0 V to 18 V (REF1 = 0 V and REF2 = +18 V) or -9 V to +9 V (REF1 = -9 V and REF2 = +9 V)




Figure 1. Functional diagram: DA108S1





Figure 2. Functional diagram: DA112S1



Characteristics DA108S1 / DA112S1

1 Characteristics

Table 1. Absolute maximum ratings ($T_{amb} = 25$ °C)

Symbol	Parameter	Value	Unit	
V _{RRM}	Repetitive peak reverse voltage (for one single diode)			V
I _{PP}	Repetitive peak forward current (1)	12	Α	
Р	Power dissipation	0.73	W	
T _{stg}	Storage temperature range	-55 to +150	°C	
Tj	Operating junction temperature range	-55 to +150	°C	
TL	Maximum lead temperature for soldering during 10 s.	260	°C	

^{1.} The surge is repeated after the device returns to ambient temperature

Table 2. Thermal resistance

Symbol	Parameter	Value	Unit
R _{th (j-a)}	Junction to ambient	170	°C/W

Table 3. Electrical characteristics($T_{amb} = 25 \, ^{\circ}C$)

Symbol	Parameter			Max.	Unit
V _{FP}	Peak forward voltage	I _{PP} = 12 A, t _p = 8/20 μs	DA108S1	9	V
			DA112S1	12	
V _F	Forward voltage	I _F = 50 mA		1.2	V
I _R	Reverse leakage current	V _R = 15 V		2	μA

DA108S1 / DA112S1 Characteristics

Figure 3. Input capacitance


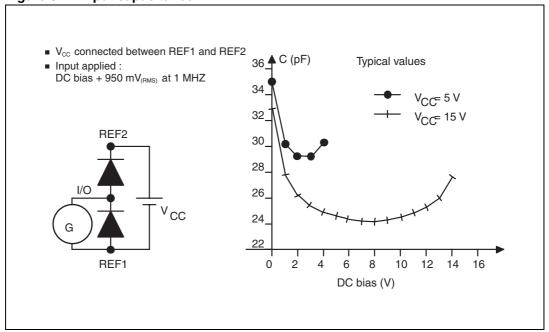


Figure 4. Typical peak forward voltage characteristics (8/20 µs pulse)

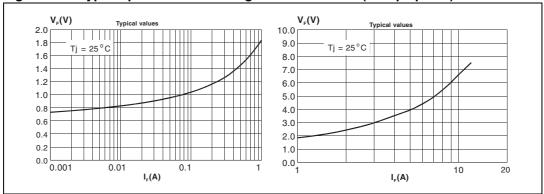

577

Characteristics DA108S1 / DA112S1

LOGIC SIDE

VCC

VSS

VSS

VCC

VSS

A

A

GND

TPlux

A

GND

TPlux


B

B

DA1xxS1

Figure 5. Application 1: ISDN interface protection, residual lightning surges at transformer secondary are suppressed by DA108S1



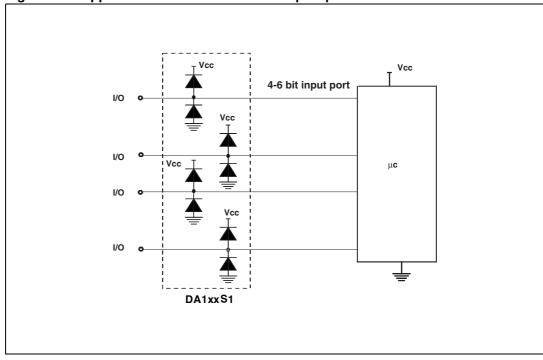


Note: **IMPORTANT**: DA108S1 must be connected to the reference voltages through REF1 and REF2.

4/8

2 Ordering information scheme

Figure 7. Ordering information scheme

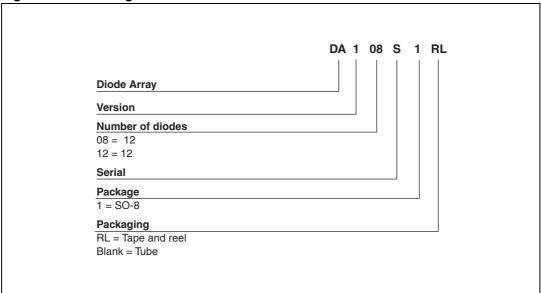

3 Package mechanical data

Epoxy meets UL94, V0

In order to meet environmental requirements, ST offers these devices in ECOPACK® packages. These packages have a lead-free second level interconnect. The category of second level interconnect is marked on the package and on the inner box label, in compliance with JEDEC Standard JESD97. The maximum ratings related to soldering conditions are also marked on the inner box label. ECOPACK is an ST trademark. ECOPACK specifications are available at www.st.com.

Table 4. SO-8 dimensions


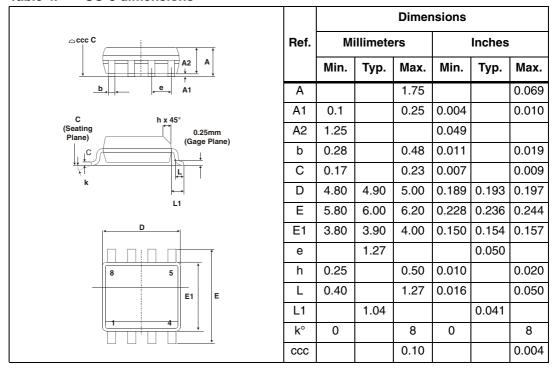


Figure 8. SO-8 footprint dimensions in mm (inches)

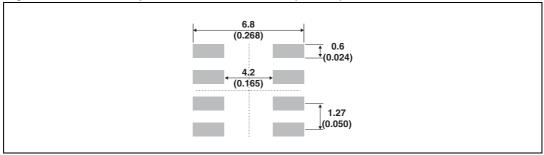

6/8

4 Ordering information

Figure 9. Ordering information

- igaile or — ordering information					
Order codes	Marking	Package	Weight	Base qty	Delivery mode
DA108S1	DA108S	- SO-8	0.11 g	100	Tube
DA108S1RL	DA1003			2500	Tape and reel ⁽¹⁾
DA112S1	DA112S			100	Tube
DA112S1RL	DATIZO			2500	Tape and reel ⁽¹⁾

^{1.} Prefered packaging is tape and reel

5 Revision history

Figure 10. Revision history

Date Revision		Changes		
Aug-2001	4	Previous release.		
15-Feb-2007	5	Reformatted to current standard. Standard typing error corrected.		
15-Jan-2008	6	Reformatted to current standards. Added paragraph on maximum input voltage range to <i>Description</i> . Parameters updated in <i>Table 1</i> . Added Pin 1 marker to package illustration. Added <i>Figure 8: SO-8 footprint dimensions in mm (inches)</i> .		

577

Please Read Carefully:

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.

UNLESS EXPRESSLY APPROVED IN WRITING BY AN AUTHORIZED ST REPRESENTATIVE, ST PRODUCTS ARE NOT RECOMMENDED, AUTHORIZED OR WARRANTED FOR USE IN MILITARY, AIR CRAFT, SPACE, LIFE SAVING, OR LIFE SUSTAINING APPLICATIONS, NOR IN PRODUCTS OR SYSTEMS WHERE FAILURE OR MALFUNCTION MAY RESULT IN PERSONAL INJURY, DEATH, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE. ST PRODUCTS WHICH ARE NOT SPECIFIED AS "AUTOMOTIVE GRADE" MAY ONLY BE USED IN AUTOMOTIVE APPLICATIONS AT USER'S OWN RISK.

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2008 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

www.st.com

577