

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China









DS21S07A SCSI Terminator

www.maxim-ic.com


GENERAL DESCRIPTION

Fast SCSI and Ultra SCSI require the use of active terminations at both ends of every cable segment in a SCSI system with single-ended drivers and receivers. The DS21S07A SCSI terminator, which is fully compliant with these standards, enables the designer to gain the benefits of active termination: greater immunity to voltage drops on the TERMPWR (TERMination PoWeR) line, enhanced high-level noise immunity, intrinsic TERMPWR decoupling, and very low quiescent current consumption. The DS21S07A integrates a regulator and nine precise switched 110Ω termination resistors into a monolithic IC. The DS21S07A can be electrically isolated from the SCSI bus without physical removal from the SCSI device.


FEATURES

- Fully Compliant with SCSI-1, Fast SCSI, and Ultra SCSI
- Backward Compatible to the DS2107 and DS2107A
- Provides Active Termination for Nine Signal Lines
- Laser-Trimmed 110Ω Termination Resistors Have 2% Tolerance
- Low Drop-Out Voltage Regulator
- Power-Down Mode Isolates Termination Resistors from the Bus
- SCSI Bus Hot Plug Compatible
- Fully Supports Actively Negated SCSI Signals
- On-Board Thermal Shutdown Circuitry
- 16-Pin Plastic SO (DS21S07AS) and 20-Pin Plastic TSSOP (Thin Shrink Small Outline Package) (DS21S07AE)

PIN CONFIGURATIONS

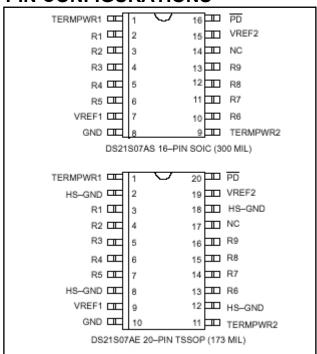

ACTUAL FOOTPRINT SIZE



ORDERING INFORMATION

PART	VOLTAGE	PIN-	TOP
TAKI	(V)	PACKAGE	MARK
DS21S07AS	5	16SO	DS21T07S
DS21S07AS+	5	16SO	DS21T07S
DS21S07AS/T&R	5	16SO	DS21T07S
DS21S07AS+T&R	5	16SO	DS21T07S
DS21S07AE	5	20TSSOP	DS21T07E
DS21S07AE/T&R	5	20TSSOP	DS21T07E

⁺ Denotes lead-free package. The top mark includes a "+" on lead-free packages.

Note: All devices are specified over the 0°C to +70°C operating temperature range.

1 of 5 REV: 022106

FUNCTIONAL DESCRIPTION

The DS21S07A consists of a bandgap reference, buffer amplifier, and nine termination resistors (Figure 1). The bandgap reference circuit produces a precise 2.55V level that is fed to a buffer amplifier. The buffer produces a 2.85V level and can source at least 24mA into each of the termination resistors when the signal line is low (active). When the driver for a given signal line turns off, the terminator pulls the signal line to 2.85V (quiescent state). To handle actively negated SCSI signals, the buffer can sink at least 200mA, and VREF will move less than 60mV. When all lines settle in the quiescent state, the regulator consumes about 2.5mA. When the DS21S07A is put into power-down mode by bringing \overline{PD} low, the power-down circuitry turns off the transistors on each signal line. This isolates the DS21S07A from the signal lines and effectively removes it from the circuit. The power-down pin (\overline{PD}) has an internal $50k\Omega$ pullup resistor. To place the DS21S07A into an active state, the \overline{PD} pin should be left open circuited. When installed on disk drives or RAID system components, the DS21S07A will not affect the SCSI bus during a hot plug operation.

To ensure proper operation, both the TERMPWR1 and TERMPWR2 pins must be connected to the SCSI bus TERMPWR line and both the VREF1 and VREF2 pins must be tied together externally. Each DS21S07A requires a 4.7μF capacitor connected between the VREF pins and ground. Figure 2 details a typical SCSI bus configuration. In an 8-bit-wide SCSI bus arrangement ("A" Cable), two DS21S07A's would be needed at each end of the SCSI cable to terminate the 18 active signal lines. In a 16-bit-wide SCSI bus arrangement ("P" Cable), three DS21S07A's would be needed at each end of the SCSI cable to terminate the 27 active signal lines.

PD TERMPWR1 Power TERMPWR2 Down 50K Ohm 110 Ohms Circuitry R1 110 Ohms R2 Bandgap 110 Ohms Reference R3 110 Ohms R4 110 Ohms 110 Ohms R6 GND 110 Ohms R7 110 Ohms R8 110 Ohms VREF1 VREF2

Figure 1. DS21S087A Block Diagram

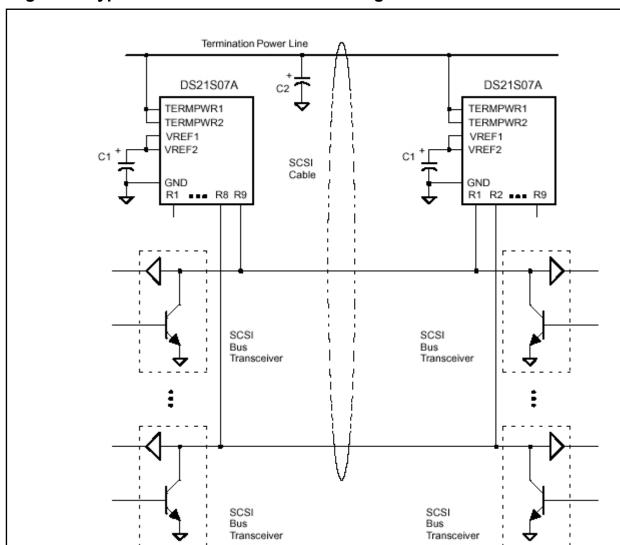


Figure 2. Typical Differential SCSI Bus Configuration

NOTE 1: C1 = 4.7μ F TANTALUM CAPACITOR; C2 = 2.2μ F TANTALUM OR 4.7μ F ALUMINUM CAPACITOR. **NOTE 2:** IF THE DS21S07A IS TO BE EMBEDDED INTO A PERIPHERAL THAT WILL ACT AS A TARGET ON A SCSI BUS, IT IS RECOMMENDED THAT TERMPWR BE DERIVED FROM THE SCSI CABLE, NOT GENERATED LOCALLY. IN THIS CONFIGURATION, IF A POWER FAILURE OCCURS IN THE PERIPHERAL, IT WILL NOT AFFECT THE BUS.

NOTE 3: A HIGH-FREQUENCY BYPASS CAPACITOR (0.1 μ F RECOMMENDED) CAN BE ADDED IN PARALLEL TO C1 FOR APPLICATIONS USING FAST RISE/FALL TIME DRIVERS.

Table 1. Pin Description

Pl	IN	NIADATE	EVINCENON			
TSSOP	SO	NAME	FUNCTION			
1	1	TERMPWR1	Termination Power 1. Should be connected to the SCSI TERMPWR line. Must be decoupled with either a 2.2μF capacitor or 4.7μF capacitor. See Figure 2.			
2, 8, 12, 18	_	HS-GND	Heat Sink Ground. Internally connected to the mounting pad. Should be either grounded or electrically isolated from other circuitry.			
3–7, 13–16	2–6, 10–13	R1–R9	Signal Termination 1–9. 110Ω termination.			
9	7	VREF1	Reference Voltage 1. Must be externally connected directly to the VREF2 pin. Must be decoupled with a 4.7μF capacitor as shown in Figure 2.			
10	8	GND	Ground. 0V, signal ground.			
11	9	TERMPWR2	Termination Power 2. Should be connected to the SCSI TERMPWR line. Must be decoupled with either a 2.2μF capacitor or 4.7μF capacitor. See Figure 2.			
17	14	NC	No Connection. Do not connect any signal to this pin.			
19	15	VREF2	Reference Voltage 2. Must be externally connected directly to the VREF1 pin. Must be decoupled with a 4.7μF capacitor as shown in Figure 2.			
20	16	PD	Active-Low Power-Down. When tied low, the DS21S07A enters a power-down mode. Contains an internal 50kΩ pullup resistor. Strap low to deactivate the DS21S07A; leave open circuited to activate the DS21S07A			

ABSOLUTE MAXIMUM RATINGS

Voltage Range on Any Pin Relative to Ground	1.0V to +7.0V
Operating Temperature Range	0°C to +70°C
Storage Temperature Range	55°C to +125°C
Soldering Temperature	

This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operation sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods of time may affect device reliability.

RECOMMENDED OPERATING CONDITIONS

 $(T_A = 0^{\circ}C \text{ to } +70^{\circ}C)$

PARAMETER	SYM	MIN	TYP	MAX	UNITS	NOTES
TERMPWR Voltage	V_{TP}	4.00		5.50	V	
PD Active	V_{PDA}	-0.3		+0.8	V	
PD Inactive	V_{PDI}	2.0	1	$V_{\rm TP} + 0.3$	V	

DC CHARACTERISTICS

 $(T_A = 0^{\circ}C \text{ to } +70^{\circ}C)$

PARAMETER	SYMBOL	MIN	TYP	MAX	UNITS	NOTES
TERMPWR Current	I_{TP}			250	mA	1, 3
			2.5	5	mA	1, 4
Power-Down Current	I_{PD}		100	150	μA	1, 2, 5
Termination Resistance	R_{TERM}	108	110	112	Ω	1, 2
Die Thermal Shutdown	T_{SD}	150			°C	1, 6
Power-Down Termination	C_{PD}		3.0	5.0	nΕ	1 2 5 6
Capacitance			3.0	3.0	pF	1, 2, 5, 6
Input Leakage High	$ m I_{IH}$	-1.0			μA	1, 8
Input Leakage Low	$ m I_{IL}$			1.0	μA	1, 7

REGULATOR CHARACTERISTICS

 $(T_A = 0^{\circ}C \text{ to } +70^{\circ}C)$


PARAMETER	SYMBOL	MIN	TYP	MAX	UNITS	NOTES
Output Voltage	$ m V_{REF}$	2.79	2.85	2.93	V	1, 2
Drop-Out Voltage	$ m V_{DROP}$		0.50	0.75	V	3, 6
Line Regulation	LI_{REG}		1.0	2.0	%	1, 4
Load Regulation	LO_{REG}		1.3	3.0	%	1, 3
Current Limit	I_{LIM}		350		mA	1
Sink Current	I_{SINK}	200			mA	1

NOTES:

- 1) 4.00V < TERMPWR < 5.50V.
- 2) 0.0V < signal lines < TERMPWR.
- 3) All signal lines = 0V.
- 4) All signal lines open.
- 5) $\overline{PD} = 0V$.
- 6) Guaranteed by design; not production tested.
- 7) R1 to R9 only.
- 8) R1 to R9 and \overline{PD} .


PACKAGE INFORMATION

(The package drawing(s) in this data sheet may not reflect the most current specifications. For the latest package outline information, go to www.maxim-ic.com/DallasPackInfo.)

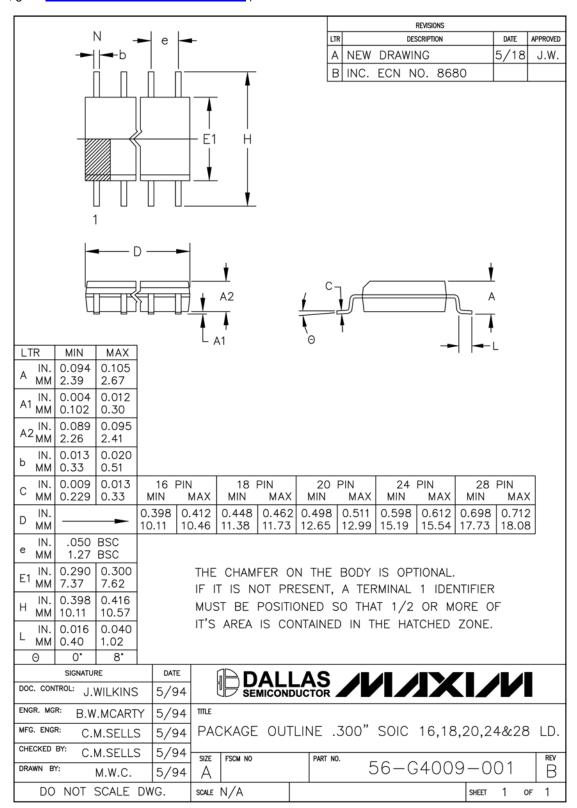

PACKAGE INFORMATION (continued)

(The package drawing(s) in this data sheet may not reflect the most current specifications. For the latest package outline information, go to www.maxim-ic.com/DallasPackInfo.)

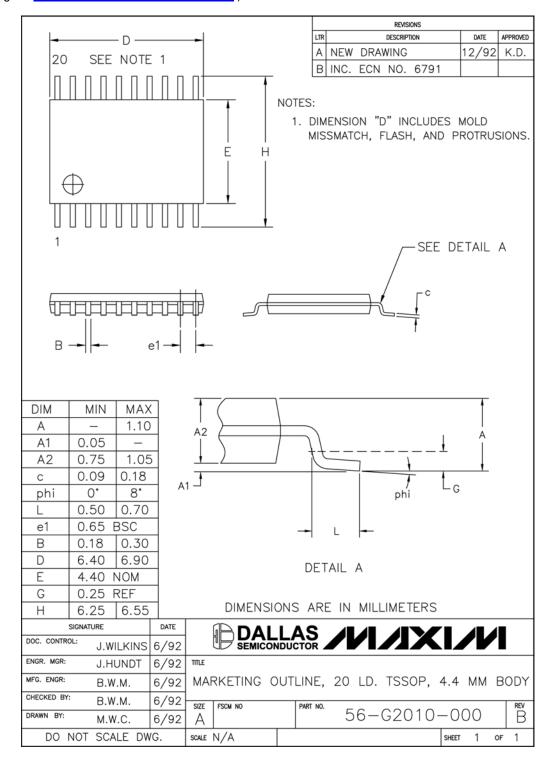

8 of 8

Maxim/Dallas Semiconductor cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim/Dallas Semiconductor product. No circuit patent licenses are implied. Maxim/Dallas Semiconductor reserves the right to change the circuitry and specifications without notice at any time.

Maxim Integrated Products, 120 San Gabriel Drive, Sunnyvale, CA 94086 408-737-7600 © 2006 Maxim Integrated Products • Printed USA