# mail

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



# Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832 Email & Skype: info@chipsmall.com Web: www.chipsmall.com Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



DSC8102 | DSC8122




### Programmable Low-Jitter Precision LVPECL Oscillator

#### **General Description**

The DSC8102 & DSC8122 series of high performance field-programmable oscillators utilizes a proven silicon MEMS technology to provide excellent jitter and stability over a of supply voltages wide range and temperatures. Using the TIMEFLASH programmer, the end user can easily program the oscillators' frequency in the field for immediate testing or use in advance prototype development or production.

DSC8102 has a standby feature allowing it to completely power-down when EN pin is pulled low; whereas for DSC8122, only the outputs are disabled when EN is low. Both oscillators are available in industry standard packages, including the small 3.2x2.5 mm<sup>2</sup>, and are "drop-in" replacement for standard 6-pin LVPECL guartz oscillators.

#### **Block Diagram**

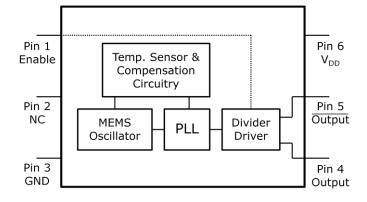

### **Output Enable Modes**

EN Pin	DSC8102	DSC8122
High	Outputs Active	Outputs Active
NC	Outputs Active	Outputs Active
Low	Standby	Outputs Disabled

#### **Features**

- Low RMS Phase Jitter: <1 ps (typ)
- High Stability: ±10, ±25, ±50 ppm
- Wide Temperature Range Industrial: -40° to 85° C Ext. commercial: -20° to 70° C
- High Supply Noise Rejection: -50 dBc
- Wide Freq. Range: 10 to 460 MHz
- Small Industry Standard Footprints o 2.5x2.0, 3.2x2.5, 5.0x3.2, & 7.0x5.0 mm
- Excellent Shock & Vibration Immunity Qualified to MIL-STD-883
- High Reliability 20x better MTF than guartz oscillators
- Low Current Consumption
- Supply Range of 2.25 to 3.6 V
- Standby & Output Enable Function
- Lead Free & RoHS Compliant
- LVDS & HCSL Versions Available

#### **Applications**

- Storage Area Networks SATA, SAS, Fibre Channel
- Passive Optical Networks o EPON, 10G-EPON, GPON, 10G-PON
- Ethernet 1G, 10GBASE-T/KR/LR/SR, and FCoE
- HD/SD/SDI Video & Surveillance
- PCI Express: Gen 1 & Gen 2
- DisplayPort

All Rights Reserved. No part of this document may be copied or reproduced in any form without the prior written permission of Micrel, Inc. Micrel Inc. may update or make changes to the contents, products, programs or services described at any time without notice. This document neither states nor implies any kind of warranty, including, but not limited to implied warranties of merchantability or fitness for a particular use. Page 1 |

**Ordering Code** 

Enable Modes

0: Enable/Standby

**DSC81** 0 **2** C I 5

2: Enable/Disable

<u>Package</u> A: 7.0x5.0mm

B: 5.0x3.2mm

C: 3.2x2.5mm

D: 2.5x2.0 mm



Packing

T: Tape & Reel

Т

: Tube ſ

Temp Range

E: -20 to 70

I: -40 to 85

\_

Stability

1: ±50ppm

2: ±25ppm 5: ±10ppm

#### **Absolute Maximum Ratings**

Item	Min	Max	Unit	Condition
Supply Voltage	-0.3	+4.0	V	
Input Voltage	-0.3	V <sub>DD</sub> +0.3	V	
Junction Temp	-	+150	°C	
Storage Temp	-55	+150	°C	
Soldering Temp	-	+260	°C	40sec max.
ESD	-		V	
HBM		4000		
MM		400		
CDM		1500		

Note: 1000+ years of data retention on internal memory

#### **Specifications**

pecifications						
Parameter		Condition	Min.	Тур.	Max.	Unit
Supply Voltage <sup>1</sup>	$V_{DD}$		2.25		3.6	V
Supply Current	I <sub>DD</sub>	EN pin low – outputs are disabled DSC8102 DSC8122		20	0.095 22	mA
Frequency Stability	Δf	Includes frequency variations due to initial tolerance, temp. and power supply voltage		±10 ±25 ±50	ppm	
Aging	Δf	1 year @25°C			±5	ppm
Startup Time <sup>2</sup>	t <sub>su</sub>	T=25°C			5	ms
Input Logic Levels Input logic high Input logic low	V <sub>IH</sub> V <sub>IL</sub>		0.75xV <sub>DD</sub> -		- 0.25xV <sub>DD</sub>	V
Output Disable Time <sup>3</sup>	t <sub>DA</sub>				5	ns
Output Enable Time	t <sub>EN</sub>	DSC8102 DSC8122			5 20	ms ns
Enable Pull-Up Resistor <sup>4</sup>		Pull-up resistor exist		40		kΩ
		LVPECL Outputs				
Supply Current	$I_{\text{DD}}$	Output Enabled, $R_L$ =50 $\Omega$		56.5	58	mA
Output Logic Levels Output logic high Output logic low	V <sub>OH</sub> V <sub>OL</sub>	$R_L=50\Omega$	V <sub>DD</sub> -1.08 -		- V <sub>DD</sub> -1.55	V
Pk to Pk Output Swing		Single-Ended		800		mV
Output Transition time <sup>3</sup> Rise Time Fall Time	t <sub>R</sub> t <sub>F</sub>	20% to 80% $R_L=50\Omega$ , $C_L=0pF$		250		ps
Frequency	f <sub>0</sub>	Single Frequency	10		460	MHz
Output Duty Cycle	SYM	Differential	48		52	%
Period Jitter	J <sub>PER</sub>			2.5		рs <sub>кмs</sub>
Integrated Phase Noise	J <sub>PH</sub>	200kHz to 20MHz @156.25MHz 100kHz to 20MHz @156.25MHz 12kHz to 20MHz @156.25MHz		0.25 0.38 1.7	2	ps <sub>RMS</sub>

Notes:

Pin 6  $V_{\mbox{\scriptsize DD}}$  should be filtered with 0.1uf capacitor. 1.

 $t_{\text{D}}$  is time to 100ppm of output frequency after V\_{\text{DD}} is applied and outputs are enabled. Output Waveform and Test Circuit figures below define the parameters. 2.


3.

Output is enabled if pad is floated or not connected. 4.

All Rights Reserved. No part of this document may be copied or reproduced in any form without the prior written permission of Micrel, Inc. Micrel Inc. may update or make changes to the contents, products, programs or services described at any time without notice. This document neither states nor implies any kind of warranty, including, but not limited to implied warranties of merchantability or fitness for a particular use. Page 2 |

MICREL


#### Nominal Performance Parameters (Unless specified otherwise: T=25° C, V<sub>DD</sub>=3.3 V)

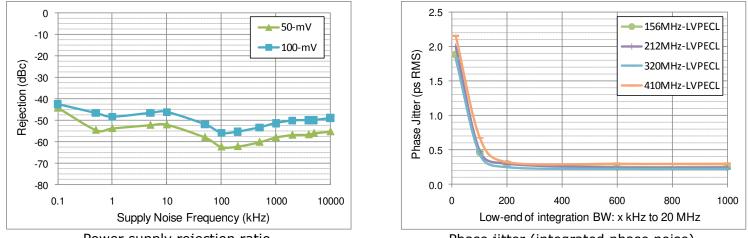


Power supply rejection ratio

Phase jitter (integrated phase noise)

#### **Output Waveform**

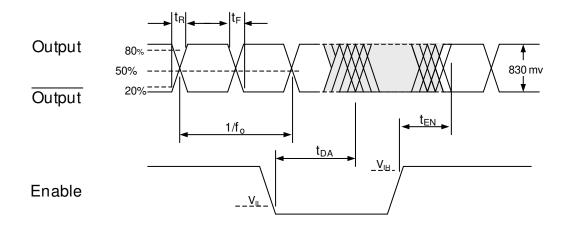


#### **Typical Termination Scheme**

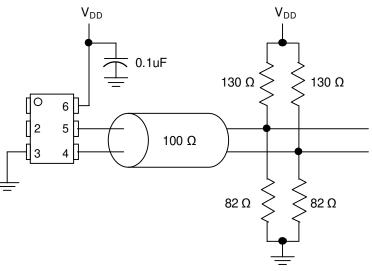


All Rights Reserved. No part of this document may be copied or reproduced in any form without the prior written permission of Micrel, Inc. Micrel Inc. may update or make changes to the contents, products, programs or services described at any time without notice. This document neither states nor implies any kind of warranty, including, but not limited to implied warranties of merchantability or fitness for a particular use. Page 3 |



#### **Test Circuit**

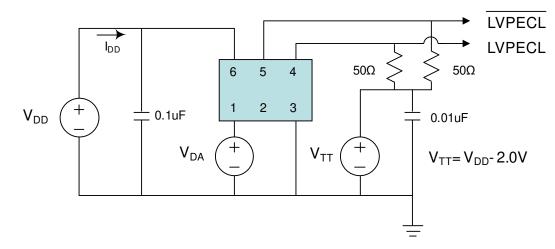

#### **Solder Reflow Profile**

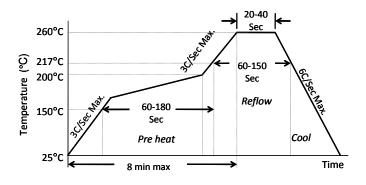


MSL 1 @ 260°C refer to JSTD-020C				
Ramp-Up Rate (200°C to Peak Temp)	3°C/Sec Max.			
Preheat Time 150°C to 200°C	60-180 Sec			
Time maintained above 217°C	60-150 Sec			
Peak Temperature	255-260°C			
Time within 5°C of actual Peak	20-40 Sec			
Ramp-Down Rate	6°C/Sec Max.			
Time 25°C to Peak Temperature	8 min Max.			

All Rights Reserved. No part of this document may be copied or reproduced in any form without the prior written permission of Micrel, Inc. Micrel Inc. may update or make changes to the contents, products, programs or services described at any time without notice. This document neither states nor implies any kind of warranty, including, but not limited to implied warranties of merchantability or fitness for a particular use. Page 4 | MK-Q-B-P-D-110410-02-2


## **MICREL**

#### **Package Dimensions**

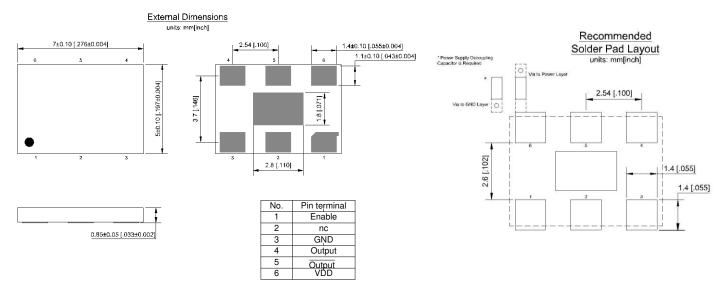

7.0 x 5.0 mm Plastic Package


#### 5.0 x 3.2 mm Plastic Package

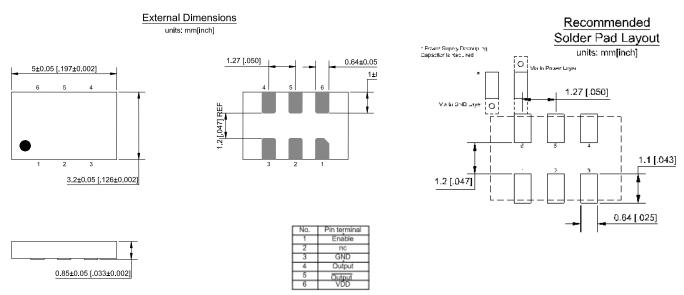

All Rights Reserved. No part of this document may be copied or reproduced in any form without the prior written permission of Micrel, Inc. Micrel Inc. may update or make changes to the contents, products, programs or services described at any time without notice. This document neither states nor implies any kind of warranty, including, but not limited to implied warranties of merchantability or fitness for a particular use. Page 5 |


Programmable Low-Jitter Precision LVPECL Oscillator

# MICREL

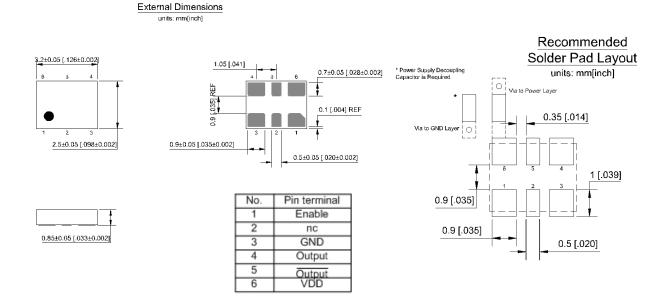

#### 3.2 x 2.5 mm Plastic Package



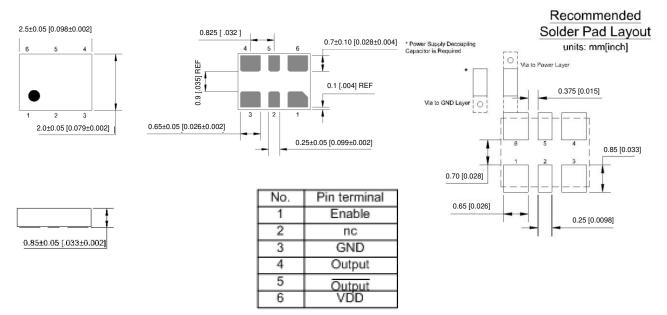

#### **Disclaimer:**

Micrel makes no representations or warranties with respect to the accuracy or completeness of the information furnished in this data sheet. This information is not intended as a warranty and Micrel does not assume responsibility for its use. Micrel reserves the right to change circuitry, specifications and descriptions at any time without notice. No license, whether express, implied, arising by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Micrel's terms and conditions of sale for such products, Micrel assumes no liability whatsoever, and Micrel disclaims any express or implied warranty relating to the sale and/or use of Micrel products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright or other intellectual property right.

MICREL, Inc.	•	2180 Fortune Drive,	San Jose, California 95	5131	•	USA
Phone: +1 (408) 944-0800	•	Fax: +1 (408) 474-1000	<ul> <li>Email: hbwhelp@micrel.com</li> </ul>	om	•	www.micrel.com

All Rights Reserved. No part of this document may be copied or reproduced in any form without the prior written permission of Micrel, Inc. Micrel Inc. may update or make changes to the contents, products, programs or services described at any time without notice. This document neither states nor implies any kind of warranty, including, but not limited to implied warranties of merchantability or fitness for a particular use. Page 6 |