imall

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832 Email & Skype: info@chipsmall.com Web: www.chipsmall.com Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




LIXYS

Fast Recovery Epitaxial Diode (FRED)

V_{RSM}	\mathbf{V}_{RRM}	Туре
V	V	
600	600	DSEI 60-06A
600	600	DSEI 60-06AT

Conditions

Symbol



Maximum Ratings

TO-247 AD	
	TO-268 AA (AT Type) A

A = Anode, C = Cathode

 $I_{FAV} = 60 A$ $V_{RBM} = 600 V$

t,,

= 35 ms

Features

- International standard package JEDEC TO-247 AD
- Planar passivated chips
- Very short recovery time
- Extremely low switching losses
- Low IRM-values
- Soft recovery behaviour
- Epoxy meets UL 94V-0

Applications

- Antiparallel diode for high frequency switching devices
- Anti saturation diode
- Snubber diode
- Free wheeling diode in converters and motor control circuits
- Rectifiers in switch mode power supplies (SMPS)
- Inductive heating and melting
- Uninterruptible power supplies (UPS)
- Ultrasonic cleaners and welders

Advantages

- High reliability circuit operation
- Low voltage peaks for reduced
- protection circuits
- Low noise switching
- Low losses
- Operating at lower temperature or space saving by reduced cooling

I _{frms} I _{favm} ① I _{frm}	T _c = 70°C; re t _p < 10 μs; rep	0,	= 0.5 se width limited by T_{VJM}	100 60	A A
I _{FSM}	$T_{vJ} = 45^{\circ}C;$		(50 Hz), sine (60 Hz), sine	550 600	A
	T _{vJ} = 150°C;		(50 Hz), sine (60 Hz), sine	480 520	A
l²t	$T_{vJ} = 45^{\circ}C;$	t = 10 ms t = 8.3 ms	(50 Hz), sine (60 Hz), sine	1510 1490	A ² s
	$T_{vJ} = 150^{\circ}C;$		(50 Hz), sine (60 Hz), sine	1150 1120	A ² s
T _{VJ} T _{VJM} T _{stg}				-55+150 150 -55+150	0° 0° 0°
P _{tot}	$T_c = 25^{\circ}C$			166	W
M _d	mounting tore	que		0.81.2	Nm
Weight	typical			6	g

Symbol	Conditions C	haracte	eristic Va	alues
		typ.	max.	
I _R	$ \begin{array}{lll} V_{\rm R} = V_{\rm RRM} & T_{\rm VJ} = & 25^{\circ}{\rm C} \\ V_{\rm R} = 0.8 {\cdot} V_{\rm RRM} & T_{\rm VJ} = & 25^{\circ}{\rm C} \\ V_{\rm R} = 0.8 {\cdot} V_{\rm RRM} & T_{\rm VJ} = & 125^{\circ}{\rm C} \end{array} $		200 100 14	μA μA mA
V _F	$I_F = 70 \text{ A}$ $T_{VJ} = 150^{\circ}\text{C}$ $T_{VJ} = 25^{\circ}\text{C}$		1.5 1.8	V V
ν _{τ0} r _τ	For power-loss calculations only $T_{vJ} = T_{vJM}$		1.13 4.7	V mΩ
$f R_{thJC} \ R_{thCH}$	(version A)	0.25	0.75	K/W K/W
t _{rr}	$I_{F} = 1 \text{ A}; \text{ -di/dt} = 200 \text{ A/}\mu\text{s}; V_{R} = 30 \text{ V}; T_{VJ} = 25^{\circ}\text{C}$	35	50	ns
I _{RM}	$V_{\textrm{\tiny R}}=350$ V; $I_{\textrm{\tiny F}}=60$ A; -di_{\textrm{\tiny F}}/dt=480 A/µs L ≤0.05 µH; $T_{\textrm{\tiny VJ}}=100^{\circ}\textrm{C}$	6.0	7.5	A

 \odot I_{FAVM} rating includes reverse blocking losses at T_{VJM}. V_R = 0.8·V_{RRM}, duty cycle d = 0.5

IXYS reserves the right to change limits, test conditions and dimensions.

20070419



DSEI 60-06A DSEI 60-06AT




Fig. 1 Forward current versus voltage drop.




Fig. 4 Dynamic parameters versus junction temperature.

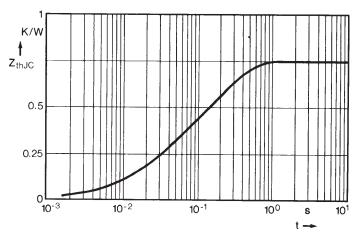


Fig. 7 Transient thermal impedance junction to case.

IXYS reserves the right to change limits, test conditions and dimensions




Fig. 2 Recovery charge versus -di_F/dt.




Fig. 5 Recovery time versus $-di_F/dt$.




Fig. 3 Peak reverse current versus -di_F/dt.





Fig. 6 Peak forward voltage versus di_F/dt.




Dimensions TO-247 AD

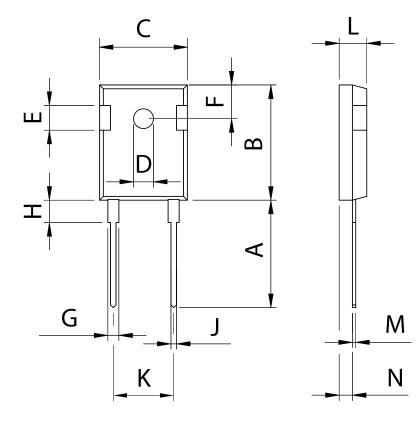

Dim.	Millimeter		Inches	
	Min.	Max.	Min.	Max.
A	19.81	20.32	0.780	0.800
B	20.80	21.46	0.819	0.845
C	15.75	16.26	0.610	0.640
D	3.55	3.65	0.140	0.144
E	4.32	5.49	0.170	0.216
F	5.4	6.2	0.212	0.244
G	1.65	2.13	0.065	0.084
H	-	4.5	-	0.177
J	1.0	1.4	0.040	0.055
K	10.8	11.0	0.426	0.433
L	4.7	5.3	0.185	0.209
M	0.4	0.8	0.016	0.031
Ν	1.5	2.49	0.087	0.102

Dimensions TO-268 AA

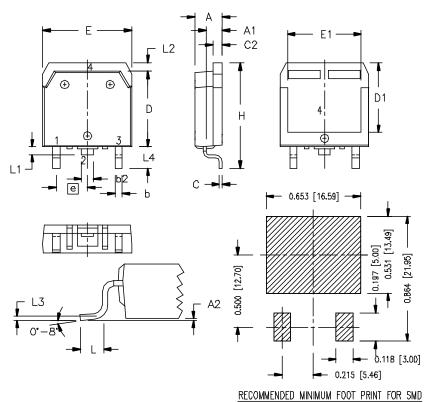

CVM	INCHES		MILLIMETERS		
SYM	MIN	MAX	MIN	MAX	
A	.193	.201	4.90	5.10	
A1	.106	.114	2.70	2.90	
A2	.001	.010	0.02	0.25	
Ь	.045	.057	1.15	1.45	
b2	.075	.083	1.90	2.10	
C	.016	.026	0.40	0.65	
C2	.057	.063	1.45	1.60	
D	.543	.551	13.80	14.00	
D1	.488	.500	12.40	12.70	
E	.624	.632	15.85	16.05	
E1	.524	.535	13.30	13.60	
е	.215 BSC 5.45 BSC		BSC		
н	.736	.752	18.70	19.10	
L	.094	.106	2.40	2.70	
L1	.047	.055	1.20	1.40	
L2	.039	.045	1.00	1.15	
L3	.010 BSC		0.25 BSC		
L4	.150	.161	3.80	4.10	

IXYS reserves the right to change limits, test conditions and dimensions.