



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China






ITEM	QTY	PART NUMBER	PART DESCRIPTION
1	1	E-XXX-X	ECON-O-GIDE Press-in Card Guide
2	1	CS-600-F XX.XX	Conductive Insert

REV.	DESCRIPTION	DATE	APPROVED
A	Engineering Release	04/04/03	M. C.
B	Typo Correction	04/15/03	M. C.
C	Eco#388, Engineering Update	05/01/03	M. C.
D	Engineering Update w/o Changes	05/13/16	J. C.
E	Tolerance Correction	08/19/16	J. C.

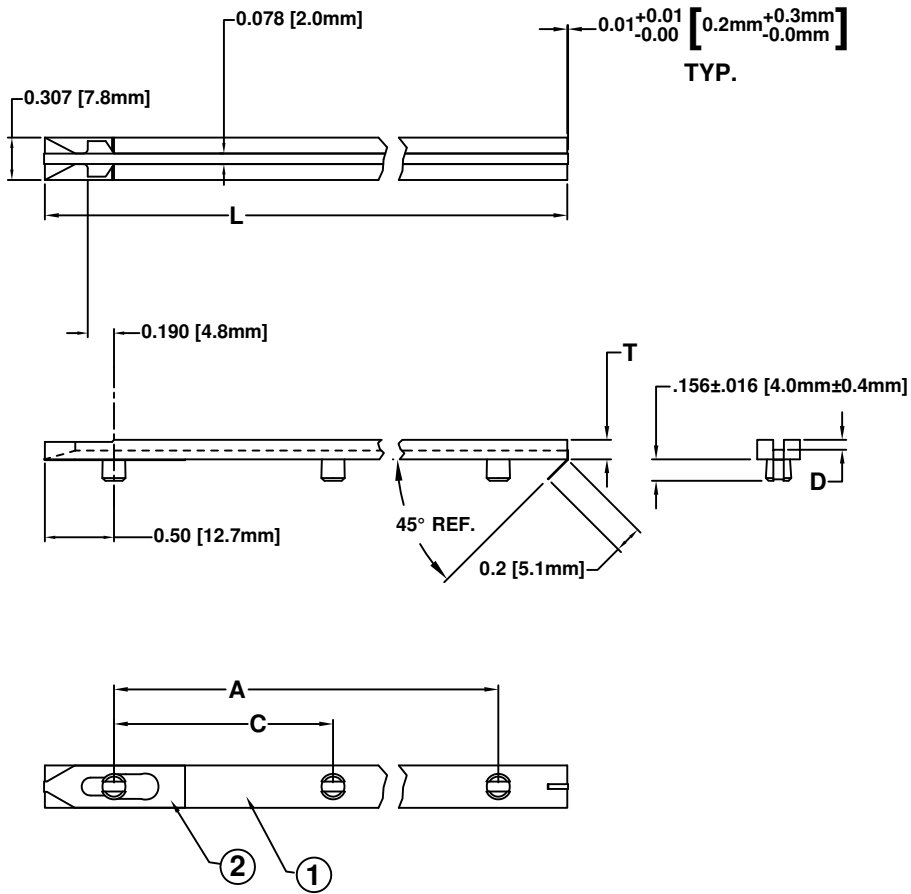

PART NO.	CONDUCTIVE INSERT	L ±.062 (1.6)	A +.016 (.41) -.032 (.81)		D ±.005 (.1)	T ±.005 (.1)	DESC DWG. NO.
E-200-CI	CS-600-F 10.75	2.0 (50.8)	1.016 (25.8)		.072 (1.8)	.125 (3.2)	-
E-250-CI	CS-600-F 10.75	2.5 (63.5)			.072 (1.8)	.125 (3.2)	84006-01
E-300-CI	CS-600-F 10.75	3.0 (76.2)	1.516 (38.5)				84006-02
E-350-CI	CS-600-F 10.75	3.5 (88.9)					84006-03
E-400-CI	CS-600-F 10.75	4.0 (101.6)					84006-04
E-450-CI	CS-600-F 10.75	4.5 (114.3)	3.016 (76.6)		.072 (1.8)	.125 (3.2)	84006-05
E-500-CI	CS-600-F 10.75	5.0 (127.0)					84006-06
E-550-CI	CS-600-F 10.75	5.5 (139.7)					84006-07
E-600-CI	CS-600-F 10.75	6.0 (152.4)	5.016 (127.4)		.072 (1.8)	.125 (3.2)	84006-08
E-650-CI	CS-600-F 10.75	6.5 (165.1)					84006-09
E-700-CI	CS-600-F 10.75	7.0 (177.8)					84006-10
E-750-CI	CS-600-F 10.75	7.5 (190.5)	6.031 (153.2)		.072 (1.8)	.125 (3.2)	84006-11
E-800-CI	CS-600-F 10.75	8.0 (203.2)					84006-12
PART NO.	CONDUCTIVE INSERT	L ±.062 (1.6)	A +.016 (.41) -.047 (1.2)	C +.016 (.41) -.032 (.81)	D ±.005 (.1)	T ±.007 (.2)	DESC DWG. NO.
E-850-CI	CS-600-F 10.75	8.5 (215.9)					84006-13
E-900-CI	CS-600-F 14.00	9.0 (228.6)	7.531 (191.3)	3.766 (95.7)	.072 (1.8)	.141 (3.6)	84006-14
E-950-CI	CS-600-F 14.00	9.5 (241.3)					84006-15
E-1000-CI	CS-600-F 14.00	10.0 (254.0)					84006-16
E-1050-CI	CS-600-F 14.00	10.5 (266.7)	9.031 (229.4)	4.516 (114.7)	.072 (1.8)	.141 (3.6)	84006-17
E-1100-CI	CS-600-F 14.00	11.0 (279.4)					84006-18
E-1150-CI	CS-600-F 14.00	11.5 (292.1)					84006-19
E-1200-CI	CS-600-F 14.00	12.0 (304.8)	10.547 (267.9)	5.274 (134.0)	.087 (2.2)	.156 (4.0)	84006-20
E-1250-CI	CS-600-F 14.00	12.5 (317.5)					84006-21
E-1300-CI	CS-600-F 14.00	13.0 (330.2)					84006-22
E-1350-CI	CS-600-F 14.00	13.5 (342.9)	12.047 (306.0)	6.024 (153.0)	.087 (2.2)	.156 (4.0)	84006-23
E-1400-CI	CS-600-F 14.00	14.0 (355.6)					84006-24

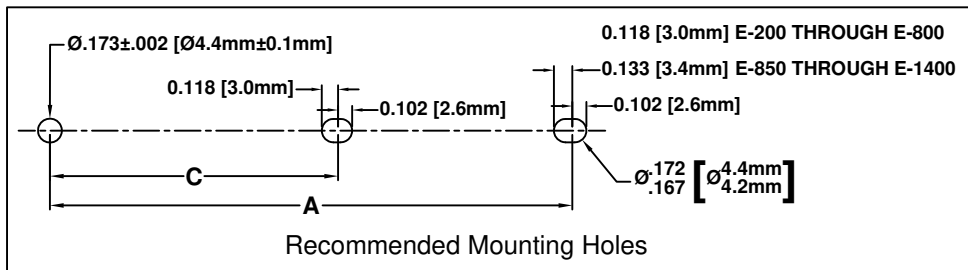

STANDARD TOLERANCE (UNLESS OTHERWISE SPECIFIED)		 BIVAR [®] 4 THOMAS, IRVINE, CA. 92618 TEL: (949) 951-8808 FAX: (949) 951-3974	
DECIMALS	ANGULAR		
.X ±.1	X° ± 1°	TITLE: ECON-O-GIDE, PRESS-IN CARD GUIDE W/ CONDUCTIVE INSERT	
.XX ±.01			
.XXX ±.005		DESIGNED: D. Green DATE: 04/04/03 REVISION: E	
		PART NO: E-XXX-CI	
CHECKED: M. Chen DATE: 04/04/03		CAGE CODE : 32559 SHEET # 1 OF 1	
CAD GENERATED DOCUMENT. DO NOT MEASURE DRAWING.			