# mail

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



### Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832 Email & Skype: info@chipsmall.com Web: www.chipsmall.com Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



# GC120 series



#### Features :

- Charger for lead-acid batteries (flooded,Gel and AGM) and Li-ion batteries (lithium iron and lithium manganese) (Note.1)
- 2 stage charging characteristic
- Universal AC input / Full range
- \* Built-in active PFC function, PF>0.97
- No load power consumption<0.5W
- 3 pole AC inlet IEC320-C14
- Class I power ( with earth pin)
- Protections: Short circuit / Overload / Over voltage / Over temperature
- Cooling by free air convection
- Fully enclosed plastic case
- 2 color LED indicator for charging status
- Approvals: UL / PSE / TUV / EAC / CB / FCC / CE
- 2 years warranty



ORDER NO.	OUTPUT CONNECTOR	SAFETY	
GC120Axx-R7B (standard model)	4pin power din	TUV/CB/FCC/CE/EAC	
GC120Axx-AD1 (optional model)	Anderson connector	UL/TUV/CB/FCC/CE/EAC	
GC120Axx- xx=12,24,48 ; = R7B,AD1			


#### SPECIFICATION

SAFETY MODEL NO. DC VOLTAGE (Typ.) RECOMMENDED BATTERY CAPACITY Note.3 CONTINUOS OUTPUT CURRENT (Typ.) RATED POWER LED INDICATOR VOLTAGE RANGE Note.4	GC120A12 13.6V 40 ~ 100Ah 7.5A 102W	GC120A24 27.2V 20~65Ah 4.42A	GC120A48 54.4V 10 ~ 35Ah	
RECOMMENDED BATTERY CAPACITY Note.3 CONTINUOS OUTPUT CURRENT (Typ.) RATED POWER LED INDICATOR	40 ~ 100Ah 7.5A	20 ~ 65Ah		
CAPACITY     Note.3       CONTINUOS OUTPUT     CURRENT (Typ.)       RATED POWER     LED INDICATOR	7.5A		10 ~ 35Ah	
CURRENT (Typ.) RATED POWER LED INDICATOR		4.42A		
LED INDICATOR	102W		2.21A	
		120.2W	120.2W	
VOLTAGE RANGE Note.4	Charging(CC) : RED Floating charging(CV) : GREEN			
	85 ~ 264VAC 120 ~ 370VDC			
FREQUENCY RANGE	47 ~ 63Hz PF>0.97 / 230VAC PF>0.99 / 115VAC at full load			
POWER FACTOR (Typ.)				
EFFICIENCY (Typ.)	86.5%	90%	91%	
AC CURRENT	1.4A / 115VAC 0.7A / 230VAC			
INRUSH CURRENT (max.)	70A / 230VAC			
LEAKAGE CURRENT(max.)	0.75mA/240VAC			
	90 ~ 110% rated output power			
OVERLOAD Note.5	Protection type : Constant current limiting recovers automatically after fault condition is removed			
SHORT CIRCUIT	Protection type : Hiccup mode, recovers automatically after fault condition is removed			
OVER VOLTAGE         14 ~ 16.5V         29 ~ 33V         59 ~ 69V           Protection type : Shut down o/o voltage, re, power on to recover         59 ~ 69V		59 ~ 69V		
OVER TEMPERATURE				
	, , , , , , , , , , , , , , , , , , ,			
			IF 10 020	
<ol> <li>Modification for charger spe 2. All parameters NOT special 3. This is MeanWell's suggest 4. Derating may be needed ur 5. Constant current operation 6. The power supply is consid</li> </ol>	cification may be required for different ly mentioned are measured at 230VAC ed range, please consult your battery n nder low input voltage. Please check th region is within 50~100% rated output	pattery specification. Please contact to input, rated load and 25°C of ambie nanufacturer for their suggestions abo e derating curve for more details. roltage.	ent temperature. out maximum charging current limitation.	
	OVERLOAD       Note.5         SHORT CIRCUIT       OVER VOLTAGE         OVER VOLTAGE       OVER VOLTAGE         OVER VOLTAGE       WORKING TEMP.         WORKING HUMIDITY       STORAGE TEMP., HUMIDITY         STORAGE TEMP., HUMIDITY       TEMP. COEFFICIENT         VIBRATION       SAFETY STANDARDS         WITHSTAND VOLTAGE       ISOLATION RESISTANCE         EMC EMISSION       EMC IMMUNITY         MTBF       DIMENSION         PACKING       PLUG         CABLE       1. Modification for charger specia         3. This is MeanWell's suggest       4. Derating may be needed up         5. Constant current operation       S. Constant current operation	OVERLOAD         Notes         90 ~ 110% rated output power           Protection type : Constant current limit         Protection type : Constant current limit           SHORT CIRCUIT         Protection type : Hiccup mode, recove           OVER VOLTAGE         14 ~ 16.5V           OVER TEMPERATURE         100 °C ± 10 °C (RTH2) detect on insid           Protection type : Shut down o/p voltage         90 ~ 110% rated output power           WORKING TEMP.         -30 ~ +70 °C (Refer to "Derating Curve")           WORKING HUMIDITY         20% ~ 90% RH non-condensing           STORAGE TEMP., HUMIDITY         -40 ~ +85 °C, 10 ~ 95% RH           TEMP. COEFFICIENT         ± 0.03% / °C (0~50 °C)           VIBRATION         10 ~ 500Hz, 2G 10min./1cycle, period fd           SAFETY STANDARDS         UL1012 (FOR GC120AXX-AD1 Only, TU           WITHSTAND VOLTAGE         I/P-O/P: 3KVAC           ISOLATION RESISTANCE         I/P-O/P: 100M Ohms / 500VDC / 25°C/7           EMC IMMUNITY         Compliance to EN61000-4-2,3,4,5,6,8,           MTBF         400.7Khrs min. MIL-HDBK-217F(25°C)           DIMENSION         167*67*35mm (L*W*H)           PACKING         0.62Kg; 20pcs/13.4Kg/0.9CUFT           PLUG         See page 2 ; Other type available by cu           3. This is MeanWell's suggested range, please consult your battery m	OVERLOAD         Note.5         90 ~ 110% rated output power           Protection type : Constant current limiting recovers automatically after fault condition           SHORT CIRCUIT         Protection type : Hiccup mode, recovers automatically after fault condition           OVER VOLTAGE         14 ~ 16.5V         29 ~ 33V           Protection type : Shut down o/p voltage, re-power on to recover         100 °C ± 10 °C (RTH2) detect on inside ambient temperature           Protection type : Shut down o/p voltage, re-power on to recover         -30 ~ +70 °C (Refer to "Derating Curve")           WORKING TEMP.         -30 ~ +70 °C (Refer to "Derating Curve")           WORKING HUMIDITY         20% ~ 90% RH non-condensing           STORAGE TEMP., HUMIDITY         -40 ~ +85 °C, 10 ~ 95% RH           TEMP. COEFFICIENT         ± 0.03% / °C (0-50 °C)           VIBRATION         10 ~ 500HZ, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes           SAFETY STANDARDS         UL1012 (FOR GC120AXX-AD1 Only, TUV EN60950-1, PSE J60950-1, EAC T           WITHSTAND VOLTAGE         I/P-O/P: 100M Ohms / 500VDC / 25°C / 70% RH           EMC EMISSION         Compliance to EN61000-4-2,3,4,5,6,8,11, light industry level, criteria A, EAC           MTBF         400.7Khrs min. ML-HDBK-217F(25°C)           DIMENSION         167°67°35mm (L*W'H)           PACKING         0.62Kg; 20pcs/13.4Kg/0.9CUFT           PLUG<	

File Name:GC120-SPEC 2018-07-30

### 120W Single Output Battery Charger

### GC120 series

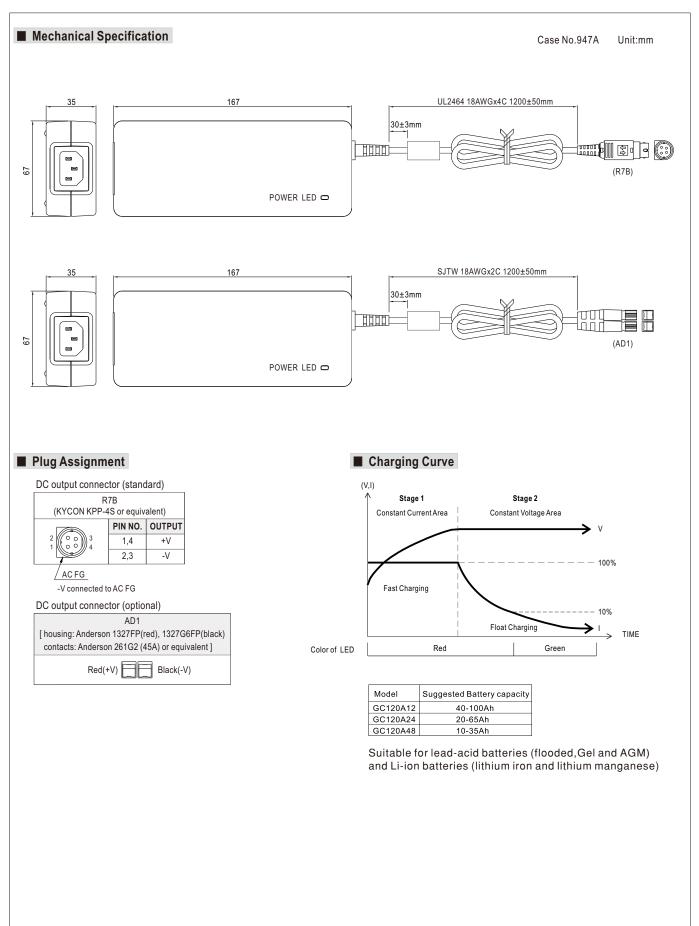

### 120W Single Output Battery Charger

# GC120 series

