

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



# Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China










### Is Now Part of



# ON Semiconductor®

To learn more about ON Semiconductor, please visit our website at <a href="https://www.onsemi.com">www.onsemi.com</a>

ON Semiconductor and the ON Semiconductor logo are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any EDA Class 3 medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, emplo





# H11N1M, H11N2M 6-Pin DIP Schmitt Trigger Output Optocoupler

Truth Table Input

Н

L

Output

L

Н

### **Features**

- High Data Rate, 5 MHz Typical (NRZ)
- Free from Latch-up and Oscillation Throughout Voltage and Temperature Ranges
- Microprocessor Compatible Drive
- Logic Compatible Output Sinks 16 mA at 0.5 V Maximum
- · Guaranteed On/Off Threshold Hysteresis
- Wide Supply Voltage Capability, Compatible with All Popular Logic Systems
- · Safety and Regulatory Approvals:
  - UL1577, 4,170 VAC<sub>RMS</sub> for 1 Minute
  - DIN-EN/IEC60747-5-5, 850 V Peak Working Insulation Voltage

# **Applications**

- Logic-to-Logic Isolator
- Programmable Current Level Sensor
- Line Receiver—Eliminate Noise and Transient Problems
- AC to TTL Conversion—Square Wave Shaping
- · Interfaces Computers with Peripherals
- Isolated Power MOS Driver for Power Supplies

### **Description**

The H11NXM series has a high-speed integrated circuit detector optically coupled to an aluminium gallium arsenide (AlGaAs) infrared emitting diode. The output incorporates a Schmitt trigger, which provides hysteresis for noise immunity and pulse shaping. The detector circuit is optimized for simplicity of operation and utilizes an open-collector output for maximum application flexibility.

# **Schematic**

# ANODE 1 CATHODE 2 G V<sub>CC</sub> 5 GND 4 V<sub>O</sub>

Figure 1. Schematic

### **Package Outlines**




Figure 2. Package Outlines

# **Safety and Insulation Ratings**

As per DIN EN/IEC 60747-5-5, this optocoupler is suitable for "safe electrical insulation" only within the safety limit data. Compliance with the safety ratings shall be ensured by means of protective circuits.

Parameter		Characteristics
Installation Classifications per DIN VDE	< 150 V <sub>RMS</sub>	I–IV
0110/1.89 Table 1, For Rated Mains Voltage	< 300 V <sub>RMS</sub>	I–IV
Climatic Classification		55/100/21
Pollution Degree (DIN VDE 0110/1.89)		2
Comparative Tracking Index		175

Symbol	Parameter	Value	Unit
V	Input-to-Output Test Voltage, Method A, $V_{IORM}$ x 1.6 = $V_{PR}$ , Type and Sample Test with $t_m$ = 10 s, Partial Discharge < 5 pC	1360	V <sub>peak</sub>
V <sub>PR</sub>	Input-to-Output Test Voltage, Method B, $V_{IORM}$ x 1.875 = $V_{PR}$ , 100% Production Test with $t_m$ = 1 s, Partial Discharge < 5 pC	1594	V <sub>peak</sub>
V <sub>IORM</sub>	Maximum Working Insulation Voltage	850	V <sub>peak</sub>
V <sub>IOTM</sub>	Highest Allowable Over-Voltage	6000	V <sub>peak</sub>
	External Creepage	≥ 7	mm
	External Clearance	≥ 7	mm
	External Clearance (for Option TV, 0.4" Lead Spacing)	≥ 10	mm
DTI	Distance Through Insulation (Insulation Thickness)	≥ 0.5	mm
T <sub>S</sub>	Case Temperature <sup>(1)</sup>	175	°C
I <sub>S,INPUT</sub>	Input Current <sup>(1)</sup>	350	mA
P <sub>S,OUTPUT</sub>	Output Power <sup>(1)</sup>	800	mW
R <sub>IO</sub>	Insulation Resistance at T <sub>S</sub> , V <sub>IO</sub> = 500 V <sup>(1)</sup>	> 10 <sup>9</sup>	Ω

### Note:

1. Safety limit values – maximum values allowed in the event of a failure.

# **Absolute Maximum Ratings**

Stresses exceeding the absolute maximum ratings may damage the device. The device may not function or be operable above the recommended operating conditions and stressing the parts to these levels is not recommended. In addition, extended exposure to stresses above the recommended operating conditions may affect device reliability. The absolute maximum ratings are stress ratings only.  $T_A = 25^{\circ}C$  unless otherwise specified.

Symbol	Parameters Value		Units
Total Device			
T <sub>STG</sub>	Storage Temperature	-40 to +125	
T <sub>OPR</sub>	Operating Temperature	-40 to +85	°C
T <sub>J</sub>	Junction Temperature	-40 to +125	°C
T <sub>SOL</sub>	Lead Solder Temperature	260 for 10 seconds	°C
P <sub>D</sub>	Total Device Power Dissipation at 25°C	210	mW
	Derate Above 25°C	2.94	mW/°C
Emitter			
l <sub>F</sub>	Continuous Forward Current	30	
$V_{R}$	Reverse Voltage	6	
I <sub>F</sub> (pk)	Forward Current – Peak (1 µs pulse, 300 pps)	100	
P <sub>D</sub>	LED Power Dissipation	60	mW
Detector			
P <sub>D</sub>	Detector Power Dissipation	150	mW
Vo	V <sub>45</sub> Allowed Range	0 to 16	V
V <sub>CC</sub>	V <sub>65</sub> Allowed Range	3 to 16	V
I <sub>O</sub>	I <sub>4</sub> Output Current	50	mA

### **Electrical Characteristics**

 $T_A = 25$ °C unless otherwise specified.

### **Individual Component Characteristics**

Symbol	Parameters	Test Conditions	Min.	Тур.	Max.	Units
Emitter						
V <sub>F</sub>	Input Forward Voltage	I <sub>F</sub> = 10 mA		1.4	2.0	V
٧F	input Forward voltage	I <sub>F</sub> = 0.3 mA	0.75	1.25		V
I <sub>R</sub>	Reverse Current	V <sub>R</sub> = 5 V			10	μΑ
СЈ	Capacitance	V = 0, f = 1.0 MHz			100	pF
Detector						
V <sub>CC</sub>	Operating Voltage Range		4		15	V
I <sub>CC(off)</sub>	Supply Current	I <sub>F</sub> = 0, V <sub>CC</sub> = 5 V		6	10	mA
I <sub>OH</sub>	Output Current, High	$I_F = 0$ , $V_{CC} = V_O = 15 V$			100	μΑ

# **Electrical Characteristics** (Continued)

 $T_A = 25$ °C unless otherwise specified.

### **Transfer Characteristics**

Symbol	DC Characteristics	Test Conditions	Device	Min.	Тур.	Max.	Units
I <sub>CC(on)</sub>	Supply Current	$I_F = 10 \text{ mA}, V_{CC} = 5 \text{ V}$	All		6.5	10.0	mA
V <sub>OL</sub>	Output Voltage, Low	$R_L$ = 270 $\Omega$ , $V_{CC}$ = 5 V, $I_F$ = $I_{F(on)}$ Maximum	All			0.5	٧
1	Turn-On Threshold Current	$R_L = 270 \Omega, V_{CC} = 5 V^{(2)}$	H11N1M	0.8		3.2	mA
I <sub>F(on)</sub>	Turri-Ori Triresnoia Current	NL-21032, VCC - 5 V	H11N2M	2.3		5.0	ША
I <sub>F(off)</sub>	Turn-Off Threshold Current	$R_L = 270 \Omega, V_{CC} = 5 V$	All	0.3			mA
I <sub>F(off)</sub> / I <sub>F(on)</sub>	Hysteresis Ratio	$R_L = 270 \Omega, V_{CC} = 5 V$	All	0.65		0.95	

### **Switching Speed**


Symbol	AC Characteristics	Test Conditions	Min.	Тур.	Max.	Units
t <sub>on</sub>	Turn-On Time	C = 120 pF, $t_P$ = 1 $\mu$ s, $R_E$ = <sup>(3)</sup> , Figure 9		100	330	ns
t <sub>r</sub>	Rise Time	C = 120 pF, $t_P$ = 1 $\mu$ s, R <sub>E</sub> = <sup>(3)</sup> , Figure 9		7.5		ns
t <sub>off</sub>	Turn-Off Time	C = 120 pF, $t_P$ = 1 $\mu$ s, $R_E$ = <sup>(3)</sup> , Figure 9		150	330	ns
t <sub>f</sub>	Fall Time	C = 120 pF, $t_P$ = 1 $\mu$ s, $R_E$ = <sup>(3)</sup> , Figure 9		12		ns
	Data Rate			5		MHz

### **Isolation Characteristics**

Symbol	Parameters	Test Conditions	Min.	Тур.	Max.	Units
V <sub>ISO</sub>	Input-Output Isolation Voltage	t = 1 Minute	4170			VAC <sub>RMS</sub>
C <sub>ISO</sub>	Isolation Capacitance	V <sub>I-O</sub> = 0 V, f = 1 MHz		0.4	0.6	pF
R <sub>ISO</sub>	Isolation Resistance	V <sub>I-O</sub> = ±500 VDC, T <sub>A</sub> = 25°C	10 <sup>11</sup>			Ω

### Notes:

- 2. Maximum I<sub>F(on)</sub> is the maximum current required to trigger the output. For example, a 3.2 mA maximum trigger current would require the LED to be driven at a current greater than 3.2 mA to guarantee the device will turn on. A 10% guard band is recommended to account for degradation of the LED over its lifetime. The maximum allowable LED drive current is 30 mA.
- 3. H11N1: R<sub>E</sub> = 910  $\Omega$ , H11N2: R<sub>E</sub> = 560  $\Omega$



# **Typical Performance Curves**




Figure 3. Transfer Characteristics




Figure 4. Threshold Current vs. Supply Voltage




Figure 5. Threshold Current vs. Temperature




Figure 6. Load Current vs. Output Voltage




Figure 7. Supply Current vs. Supply Voltage




Figure 8. LED Forward Current vs. Forward Voltage

# **Switching Test Circuit and Waveforms**

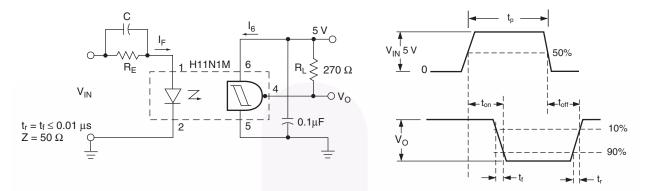


Figure 9. Switching Test Circuit and Waveforms

# **Reflow Profile**

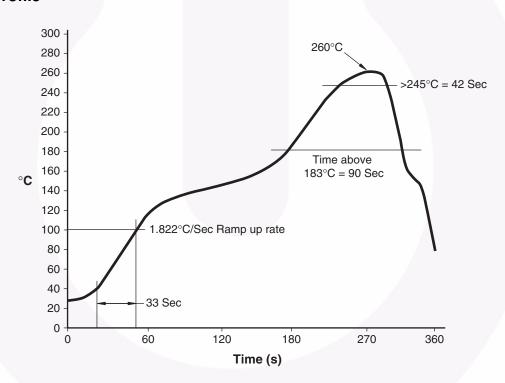


Figure 10. Reflow Profile

# **Ordering Information**

Part Number	Package	Packing Method
H11N1M	DIP 6-Pin	Tube (50 Units)
H11N1SM	SMT 6-Pin (Lead Bend)	Tube (50 Units)
H11N1SR2M	SMT 6-Pin (Lead Bend)	Tape and Reel (1000 Units)
H11N1VM	DIP 6-Pin, DIN EN/IEC60747-5-5 Option	Tube (50 Units)
H11N1SVM	SMT 6-Pin (Lead Bend), DIN EN/IEC60747-5-5 Option	Tube (50 Units)
H11N1SR2VM	SMT 6-Pin (Lead Bend), DIN EN/IEC60747-5-5 Option	Tape and Reel (1000 Units)
H11N1TVM	DIP 6-Pin, 0.4" Lead Spacing, DIN EN/IEC60747-5-5 Option	Tube (50 Units)

### Note:

4. The product orderable part number system listed in this table also applies to the H11N2M product families.

# **Marking Information**







Figure 11. Top Mark

# **Table 1. Top Mark Definitions**

1	Fairchild Logo
2	Device Number
3	DIN EN/IEC60747-5-5 Option (only appears on component ordered with this option)
4	One-Digit Year Code, e.g., "6"
5	Digit Work Week, Ranging from "01" to "53"
6	Assembly Package Code

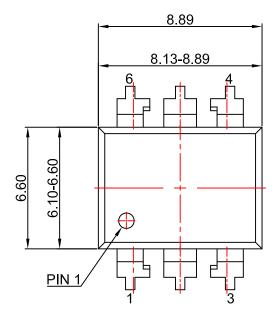

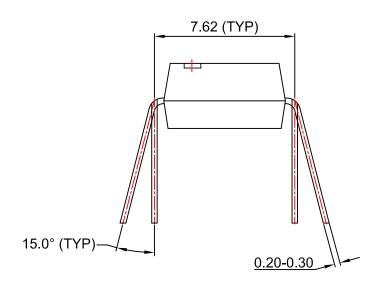


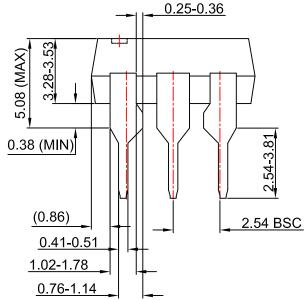


### NOTES:


- A) NO STANDARD APPLIES TO THIS PACKAGE.
- B) ALL DIMENSIONS ARE IN MILLIMETERS.
- C) DIMENSIONS ARE EXCLUSIVE OF BURRS, MOLD FLASH, AND TIE BAR EXTRUSION
- D) DRAWING FILENAME AND REVSION: MKT-N06BREV4.




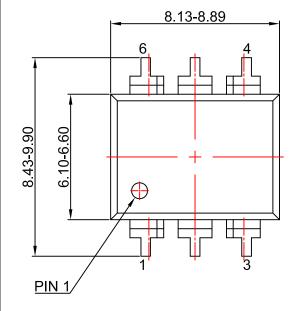

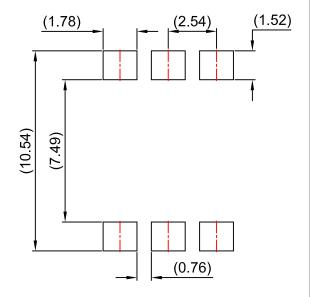


LAND PATTERN RECOMMENDATION




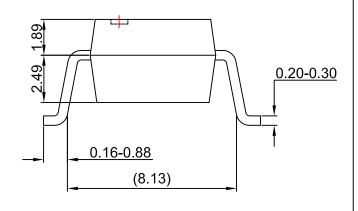


- A) NO STANDARD APPLIES TO THIS PACKAGE.
- B) ALL DIMENSIONS ARE IN MILLIMETERS.
- C) DIMENSIONS ARE EXCLUSIVE OF BURRS, MOLD FLASH, AND TIE BAR EXTRUSION
- D) DRAWING FILENAME AND REVSION: MKT-N06CREV4.









### NOTES:

- A) NO STANDARD APPLIES TO THIS PACKAGE.
- B) ALL DIMENSIONS ARE IN MILLIMETERS.
- C) DIMENSIONS ARE EXCLUSIVE OF BURRS, MOLD FLASH, AND TIE BAR EXTRUSION
- D) DRAWING FILENAME AND REVSION: MKT-N06Drev4



ON Semiconductor and in are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at <a href="www.onsemi.com/site/pdf/Patent-Marking.pdf">www.onsemi.com/site/pdf/Patent-Marking.pdf</a>. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor and see no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and h

### **PUBLICATION ORDERING INFORMATION**

### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor 19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada Email: orderlit@onsemi.com N. American Technical Support: 800-282-9855 Toll Free USA/Canada
Europe, Middle East and Africa Technical Support: Phone: 421 33 790 2910

Phone: 421 33 790 2910

Japan Customer Focus Center

Phone: 81–3–5817–1050

ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative