

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China













#### Features

- · Constant Voltage + Constant Current mode output
- MEAN WELL patented circular metal housing with class I design(Patent No.: CN201220314551)
- · Built-in active PFC function
- IP67 / IP65 rating for indoor or outdoor installations
- Function options: output adjustable via potentiometer;
   3 in 1 dimming; DALI
- Typical lifetime>50000 hours
- 5 years warranty


#### Applications

- · LED bay lighting
- · LED stage lighting
- · LED spot lighting
- Type "HL" for use in Class I, Division 2 hazardous (Classified) location.

#### Description

HBG-160 series is a 160W AC/DC LED driver featuring the circular shape design. It operates from  $90{\sim}305$ VAC and offers the dual modes constant voltage and constant current output models with different rated voltage between 24Vand 60V. Thanks to the high efficiency up to 93.5%, with the fanless design, the entire series is able to operate for  $-40\,^{\circ}\text{C} \sim +85\,^{\circ}\text{C}$  case temperature under free air convection. The design of metal housing and IP67/IP65 ingress protection level allows this series to fit both indoor and outdoor applications. HBG-160 is equipped with various function options, such as dimming methodologies, so as to provide the optimal design flexibility for LED lighting system.

#### ■ Model Encoding

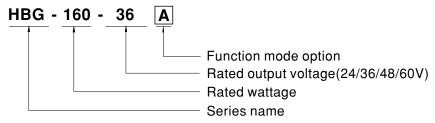

Type	IP Level	Function	Note
Blank	IP67	lo fixed.	In Stock
Α	IP65	lo adjustable through built-in potentiometer.	In Stock
В	IP67	3 in 1 dimming function (1~10Vdc, 10V PWM signal and resistance)	In Stock
AB	IP65	Io adjustable through built-in potentiometer with 3 in 1 dimming function	In Stock
DA	IP67	DALI control technology.	In Stock



## 160W Constant Voltage + Constant Current LED Driver

# HBG-160 series

#### **SPECIFICATION**

MODEL		HBG-160-24	HBG-160-36	HBG-160-48	HBG-160-60			
	DC VOLTAGE	24V	36V	48V	60V			
	CONSTANT CURRENT REGION Note.2	14.4 ~ 24V	21.6 ~ 36V	28.8 ~ 48V	36 ~ 60V			
	RATED CURRENT	6.5A	4.4A	3.3A	2.6A			
	RATED POWER	156W	158.4W	158.4W	156W			
	RIPPLE & NOISE (max.) Note.3		300mVp-p	300mVp-p	300mVp-p			
	THIT EE & HOIDE (Max.) Hote.s	Adjustable for A/AB-Type (via built-in potentiometer)						
OUTPUT	CURRENT ADJ. RANGE	3.9 ~ 6.5A 2.6 ~ 4.4A 1.98 ~ 3.3A 1.6 ~ 2.6A						
	VOLTAGE TOLERANCE Note.4	±2.0%	2.0 ~ 4.4A	1.90 ~ 3.3A	1.0 ~ 2.0A			
		±2.0% ±0.5%						
	LINE REGULATION	±1.0%						
	LOAD REGULATION							
	HOLD UP TIME (Typ.)	12ms /115VAC, 230VAC						
	VOLTAGE RANGE Note.5	90 ~ 305VAC 127 ~ 431VDC						
	TOLIAGE RANGE NO.	(Please refer to "STATIC CHARACTERISTIC" section)						
	FREQUENCY RANGE	47 ~ 63Hz						
	DOWED SACTOR	PF>0.98/115VAC, PF>0.95/230VAC, PF>0.92/277VAC@full load						
	POWER FACTOR	(Please refer to "POWER FACTOR (PF) CHARACTERISTIC" section)						
INPUT		THD<20%(@load≧60%/115VC,230VAC; @load≧75%/277VAC)						
-	TOTAL HARMONIC DISTORTION	(Please refer to "TOTAL HARMONIC DISTORTION(THD)" section)						
	EFFICIENCY (Typ.) Note.7	92%	92%	93%	93.5%			
	AC CURRENT (Typ.)	1.7A / 115VAC 0.78A / 23			30.070			
	INRUSH CURRENT (Typ.)			-				
	( ) ,	COLD START 65A(twidth=550μs measured at 50% Ipeak) at 230VAC; Per NEMA 410						
	MAX. No. of PSUs on 16A CIRCUIT BREAKER	4 units (circuit breaker of type B) / 7 units (circuit breaker of type C) at 230VAC						
		CO 75mA (277)/AC						
	LEAKAGE CURRENT	<0.75mA / 277VAC						
	OVER CURRENT	95 ~ 108%						
PROTECTION		Constant current limiting, recovers automatically after fault condition is removed						
	SHORT CIRCUIT	Hiccup mode, recovers autor						
	OVER VOLTAGE	28 ~ 34V	41 ~ 47V	54 ~ 62V	65 ~ 75V			
	OVER VOLINGE	Shut down o/p voltage with auto-recovery or re-power on to recovery						
	OVER TEMPERATURE	Shut down o/p voltage, recovers automatically after temperature goes down						
	WORKING TEMP.	Tcase=-40 ~ +85°C (Please refer to "OUTPUT LOAD vs TEMPERATURE" section)						
	MAX. CASE TEMP.	Tcase=+85°C						
ENVIRONMENT	WORKING HUMIDITY	20 ~ 95% RH non-condensing						
	STORAGE TEMP., HUMIDITY	-40 ~ +80°C, 10 ~ 95% RH						
	TEMP. COEFFICIENT	<b>IP. COEFFICIENT</b> $\pm 0.03\%$ °C $(0 \sim 50$ °C)						
	VIBRATION	10 ~ 500Hz, 5G 12min./1cycle, period for 72min. each along X, Y, Z axes						
	045557/0511515	UL8750(type"HL"), CSA C22.2 No.250.13-12, TUV EN61347-1, EN61347-2-13; BIS IS15885(for 36A,48A,48B,60A,60DA only),						
	SAFETY STANDARDS	EAC TP TC 004, GB19510.1, GB19510.14, IP65 or IP67 approved, design refer to TUV EN60950						
	DALI STANDARDS	Compliance to IEC62386-101, 102, 207 for DA-Type only						
SAFETY &	WITHSTAND VOLTAGE	I/P-O/P:3.75KVAC I/P-FG:2KVAC O/P-FG:0.5KVAC						
EMC	ISOLATION RESISTANCE							
LINO	EMC EMISSION Note.9							
	EMC IMMUNITY			y level (surge immunity:Line-Earth:4KV,Line-Line:2KV), EAC TP TC 020				
	MTBF				· · · · · · · · · · · · · · · · · · ·			
OTHERS		783.1K hrs min. Telcordia SR-332 (Bellcore); 252.3Khrs min. MIL-HDBK-217F (25°C)  ### d151.68mm *66.5mm (D * H)						
OTHERS	DIMENSION	, ,						
		PACKING 1.53Kg; 8pcs/13.8Kg/1.61CUFT  1. All parameters NOT specially mentioned are measured at 230VAC input, rated current and 25°C of ambient temperature.						
NOTE				inent and ∠o ∪ of ambient tempe	rature.			
	<ol> <li>Please refer to "DRIVING METHODS OF LED MODULE".</li> <li>Ripple &amp; noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf &amp; 47uf parallel capacitor.</li> </ol>							
	4. Tolerance : includes set up tolerance, line regulation and load regulation.							
	5. De-rating may be needed under low input voltages. Please refer to "STATIC CHARACTERISTIC" sections for details.							
	6. Length of set up time is measured at cold first start. Turning ON/OFF the driver may lead to increase of the set up time. 7. The DA type power cupils is less efficient than the typical efficiency in specification by 19/							
	<ul><li>7. The DA type power supply is less efficient than the typical efficiency in specification by 1%.</li><li>8. The driver is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected</li></ul>							
	by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again.							
		latest ErP regulation for lighting	ng fixtures, this LED drive	er can only be used behind a swit	tch without permanently			
	connected to the mains.							


10. This series meets the typical life expectancy of >50,000 hours of operation when Tcase, particularly (c) point (or TMP, per DLC), is about 70 °C or less.

11. Please refer to the warranty statement on MEAN WELL's website at <a href="http://www.meanwell.com">http://www.meanwell.com</a>
12. The ambient temperature derating of 3.5 °C/1000m with fanless models and of 5 °C/1000m with fan models for operating altitude higher than 2000m(6500ft).




#### ■ BLOCK DIAGRAM

fosc: 100KHz

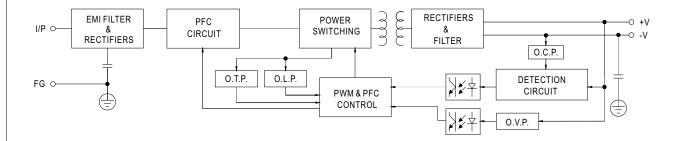

#### ■ DRIVING METHODS OF LED MODULE

X This series is able to work in either Constant Current mode (a direct drive way) or Constant Voltage mode (usually through additional DC/DC driver) to drive the LEDs.



Typical output current normalized by rated current (%)


In the constant current region, the highest voltage at the output of the driver depends on the configuration of the end systems.

Should there be any compatibility issues, please contact MEAN WELL.




#### **■ DIMMING OPERATION**

- \* DIM+ for B/AB-Type DA+ for DA-Type
- \* \*DIM- for B/AB-Type DA- for DA-Type




#### **※** 3 in 1 dimming function (for B/AB-Type)

- · Output constant current level can be adjusted by applying one of the three methodologies between DIM+ and DIM-: 1 ~ 10VDC, or 10V PWM signal or resistance.
- Direct connecting to LEDs is suggested. It is not suitable to be used with additional drivers.
- Dimming source current from power supply:  $100\mu A$  (typ.)
- O Applying additive 1 ~ 10VDC




"DO NOT connect "DIM- to -V"

O Applying additive 10V PWM signal (frequency range 100Hz ~ 3KHz):





"DO NOT connect "DIM- to -V"


Applying additive resistance:




"DO NOT connect "DIM- to -V"







Note: In the case of turning the lighting fixture down to 0% brightness, please refer to the configuration as follow, or please contact MEAN WELL for other options.

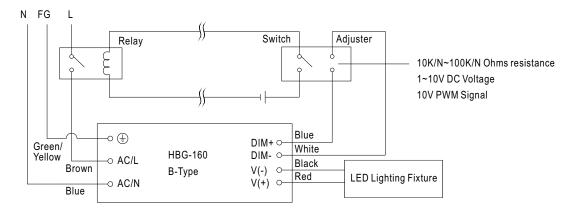


Using a switch and relay can turn ON/OFF the lighting fixture.

#### M DALI Interface (primary side; for DA-Type)


- · Apply DALI signal between DA+ and DA-.
- DALI protocol comprises 16 groups and 64 addresses.
- First step is fixed at 8% of output.



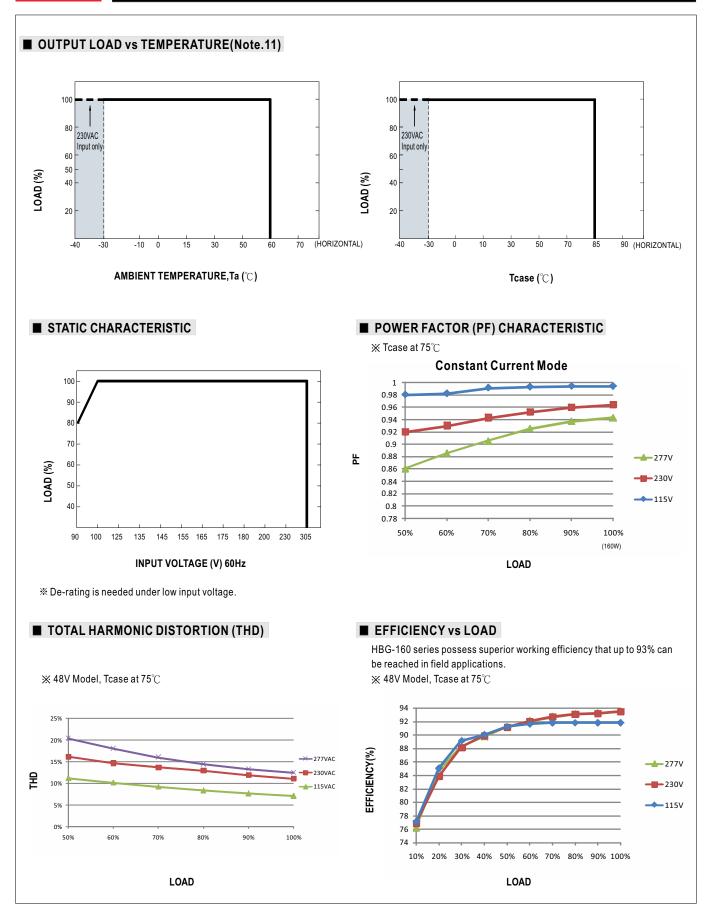




## ■ LIFE TIME

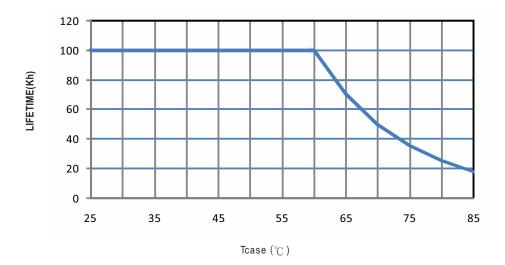


## ■ MECHANICAL SPECIFICATION Case No.211 Unit:mm ※ Blank-Type $\phi$ 151.68 (tc) 200±20 +V(Red) -V(Black) AC/L(Brown) AC/N(Blue) SJTW 18AWG\*2C FG (Green/Yellow) SJTW 18AWG\*3C

- c : Max. Case Temperature.(case temperature measured point) Ta: Ambient Temperature measured point

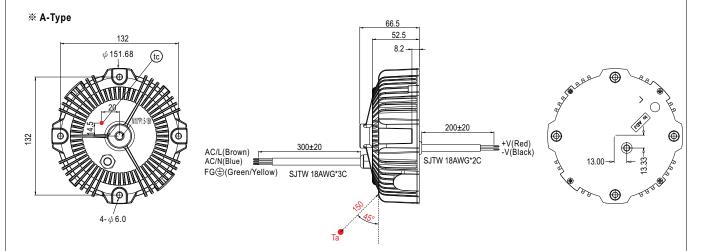


- ullet (case temperature measured point)
- Ta: Ambient Temperature measured point

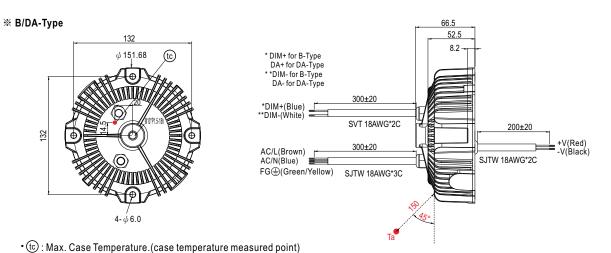

• Ta: Ambient Temperature measured point



#### **※ AB-Type**

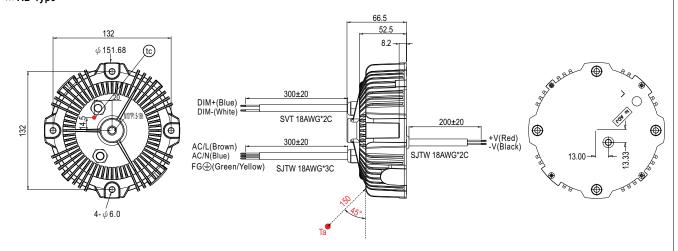

- (to): Max. Case Temperature.(case temperature measured point)
- Ta: Ambient Temperature measured point

#### ■ INSTALLATIONS



#### Caution

- Please inspect the appearance of the driver if the package is damaged. There should not be any cracks.
- · Please do not drop or bump the driver.
- · All screws including the suspension screw should be paired with a spring washer and locked tight.
- The entire luminaire, including the driver, should be limited to 10Kg or less.
- The luminaire should be cautiously protected from damage due to shock throughout packaging and transportation.
- Please thoroughly follow the preceding cautionary notes to prevent the luminaire from falling, leading to injuries.