

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China













Features

- · Constant Voltage + Constant Current mode output
- MEAN WELL patented circular metal housing with class I design(Patent No.: CN201220314551)
- Built-in active PFC function
- IP67 / IP65 rating for indoor or outdoor installations
- Function options: output adjustable via potentiometer;
 3 in 1 dimming; DALI
- Typical lifetime>50000 hours
- 5 years warranty


Applications

- · LED high/low bay lighting
- · LED canopy lighting
- · LED stage lighting
- · LED spot lighting
- · Outdoor architectural lighting system
- Type "HL" for use in Class I, Division 2 hazardous (Classified) location.

Description

HBG-200 series is a 200W AC/DC LED driver featuring the circular shape design. It operates from $90{\sim}305$ VAC and offers the dual modes constant voltage and constant current output models with different rated voltage between 36Vand 60V. Thanks to the high efficiency up to 93.5%, with the fanless design, the entire series is able to operate for $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$ case temperature under free air convection. The design of metal housing and IP67/IP65 ingress protection level allows this series to fit both indoor and outdoor applications. HBG-200 is equipped with various function options, such as dimming methodologies, so as to provide the optimal design flexibility for LED lighting system.

■ Model Encoding

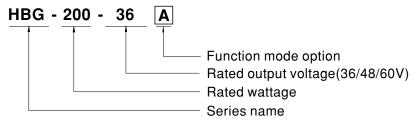

Type	IP Level	Function	Note
Blank	IP67	lo fixed.	In Stock
Α	IP65	lo adjustable through built-in potentiometer.	In Stock
В	IP67	3 in 1 dimming function (0~10Vdc, 10V PWM signal and resistance)	In Stock
AB	IP65	Io adjustable through built-in potentiometer with 3 in 1 dimming function	In Stock
DA	IP67	DALI control technology.	In Stock



200W Constant Voltage + Constant Current LED Driver

HBG-200 series


SPECIFICATION

MODEL		HBG-200-36	HBG-200-48	HBG-200-60			
	DC VOLTAGE	36V	48V	60V			
	CONSTANT CURRENT REGION Note.2		28.8 ~ 48V	36 ~ 60V			
		5.5A					
	RATED CURRENT		4.1A	3.3A			
	RATED POWER	198W	196.8W	198W			
	RIPPLE & NOISE (max.) Note.3		250mVp-p	350mVp-p			
	CURRENT ADJ. RANGE	Adjustable for A-Type and AB-Type (via bui	lt-in potentiometer)				
	OTHER TO THE TENTON	3.3 ~ 5.5A 2.46 ~ 4.1A 1.98 ~ 3.3A					
	VOLTAGE TOLERANCE Note.4	±2.0%					
	LINE REGULATION	±0.5%					
	LOAD REGULATION	±1.0%					
	SETUP, RISE TIME Note.6	2500ms,200ms /115VAC 500ms,200r	C 500ms,200ms /230VAC				
	HOLD UP TIME (Typ.)	12ms /115VAC, 230VAC					
	VOLTAGE RANGE Note.5	90 ~ 305VAC 127 ~ 431VDC (Please refer to "STATIC CHARACTERISTIC" section)					
	FREQUENCY RANGE	47 ~ 63Hz					
	POWER FACTOR	PF>0.98/115VAC, PF>0.95/230VAC, PF>0.92/277VAC@full load (Please refer to "POWER FACTOR (PF) CHARACTERISTIC" section)					
	TOTAL HARMONIC DISTORTION	THD< 20%(@load≧60%/115VC,230VAC; @load≧75%/277VAC) (Please refer to "TOTAL HARMONIC DISTORTION(THD)" section)					
	EFFICIENCY (Typ.)	92%	93%	93.5%			
	AC CURRENT (Typ.)	1.9A / 115VAC 1A / 230VAC 0.9A /	277VAC				
	INRUSH CURRENT (Typ.)	COLD START 85A(twidth=600µs measured at 50% Ipeak) at 230VAC; Per NEMA 410					
	MAX. No. of PSUs on 16A CIRCUIT BREAKER	4 units (circuit breaker of type B) / 7 units (circuit breaker of type C) at 230VAC					
	LEAKAGE CURRENT	<0.75mA/277VAC					
	OVER CURRENT	95~108% Constant current limiting, recovers automatically after fault condition is removed					
	SHORT CIRCUIT	Hiccup mode or constant current limiting, recovers automatically after fault condition is removed					
PROTECTION	SHOKT CIRCUIT	41 ~ 47V	54 ~ 62V	65 ~ 75V			
	OVER VOLTAGE			00 700			
	OVED TEMPEDATURE	Shut down o/p voltage with auto-recovery or re-power on to recovery Shut down o/p voltage, recovers automatically after temperature goes down					
	OVER TEMPERATURE	· · · · · · · · · · · · · · · · · · ·					
ENVIRONMENT	WORKING TEMP.	Tcase=-40 ~ +85℃ (Please refer to "OUTPUT LOAD vs TEMPERATURE" section)					
	MAX. CASE TEMP.	Tcase=+85°C					
	WORKING HUMIDITY	20 ~ 95% RH non-condensing					
	STORAGE TEMP., HUMIDITY	-40 ~ +80°C, 10 ~ 95% RH					
	TEMP. COEFFICIENT	±0.03%/°C (0 ~ 50°C)					
	VIBRATION	10 ~ 500Hz, 5G 12min./1cycle, period for 72min. each along X, Y, Z axes					
	SAFETY STANDARDS	UL8750(type"HL"), CSA C22.2 No.250.13-12, ENEC EN61347-1, EN61347-2-13 independent, EN62384; GB19510.14, GB19510.1; EAC TP TC 004, IP65 or IP67 approved					
	DALI STANDARDS	Compliance to IEC62386-101, 102, 207 for DA type only					
SAFETY &	WITHSTAND VOLTAGE	I/P-O/P:3.75KVAC I/P-FG:2KVAC O/P-FG:0.5KVAC					
EMC	ISOLATION RESISTANCE	I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25°C/70% RH					
	EMC EMISSION Note.8	, ,	-	1 GB17743 FAC TP TC 020			
-	EMC IMMUNITY	Compliance to EN55015, EN61000-3-2 Class C (@load ≧ 60%); EN61000-3-3; GB17625.1, GB17743,EAC TP TC 020 Compliance to EN61000-4-2,3,4,5,6,8,11, EN61547,light industry level (surge immunity:Line-Earth:4KV,Line-Line:2KV),EAC TP TC 020					
	MTBF	252.3Khrs min. MIL-HDBK-217F (25°C)					
OTHERS		(1 3)					
	DIMENSION	Refer to mechanical specification					
	PACKING	1.53Kg; 8pcs/13.8Kg/1.61CUFT					
NOTE	 All parameters NOT specially mentioned are measured at 230VAC input, rated current and 25°C of ambient temperature. Please refer to "DRIVING METHODS OF LED MODULE". Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor. Tolerance: includes set up tolerance, line regulation and load regulation. De-rating may be needed under low input voltages. Please refer to "STATIC CHARACTERISTIC" sections for details. Length of set up time is measured at cold first start. Turning ON/OFF the driver may lead to increase of the set up time. The driver is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again. The model certified for CCC(GB19510.14, GB19510.1, GB17743 and GB17625.1) is an optional model. Please contact MEAN WELL for details. To fulfill requirements of the latest ErP regulation for lighting fixtures, this LED driver can only be used behind a switch without permanently connected to the mains. This series meets the typical life expectancy of >50,000 hours of operation when Tcase, particularly (tc) point (or TMP, per DLC), is about 70°C or less. Please refer to the warranty statement on MEAN WELL's website at http://www.meanwell.com The ambient temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft). 						




■ BLOCK DIAGRAM

fosc: 100KHz

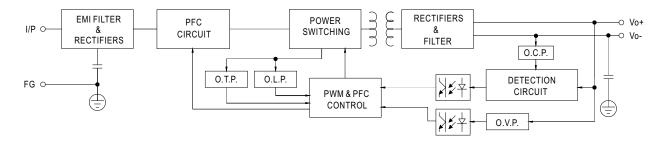

■ DRIVING METHODS OF LED MODULE

X This series is able to work in either Constant Current mode (a direct drive way) or Constant Voltage mode (usually through additional DC/DC driver) to drive the LEDs.




Typical output current normalized by rated current (%)

In the constant current region, the highest voltage at the output of the driver depends on the configuration of the end systems.

Should there be any compatibility issues, please contact MEAN WELL.




■ DIMMING OPERATION

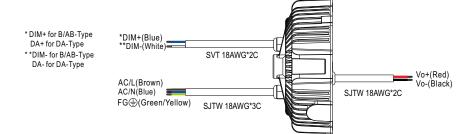


※ 3 in 1 dimming function (for B/AB-Type)


- Output constant current level can be adjusted by applying one of the three methodologies between DIM+ and DIM-: 0 ~ 10VDC, or 10V PWM signal or resistance.
- $\cdot \ \mathsf{Direct} \ \mathsf{connecting} \ \mathsf{to} \ \mathsf{LEDs} \ \mathsf{is} \ \mathsf{suggested}. \ \mathsf{lt} \ \mathsf{is} \ \mathsf{not} \ \mathsf{suitable} \ \mathsf{to} \ \mathsf{be} \ \mathsf{used} \ \mathsf{with} \ \mathsf{additional} \ \mathsf{drivers}.$
- Dimming source current from power supply: $100\mu A$ (typ.)
- O Applying additive 0 ~ 10VDC




"DO NOT connect "DIM- to -V"




 \bigcirc Applying additive 10V PWM signal (frequency range 100Hz ~ 3KHz):




"DO NOT connect "DIM- to -V"



O Applying additive resistance:




"DO NOT connect "DIM- to -V"



Note: 1. Min. dimming level is about 8% and the output current is not defined when 0% < Iout < 8%.

2. The output current could drop down to 0% when dimming input is about 0k Ω or 0Vdc, or 10V PWM signal with 0% duty cycle.

Note: In the case of turning the lighting fixture down to 0% brightness, please refer to the configuration as follow, or please contact MEAN WELL for other options.

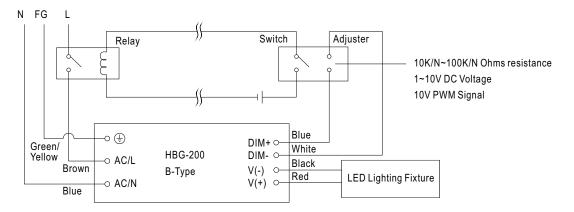


Using a switch and relay can turn ON/OFF the lighting fixture.

DALI Interface (primary side; for DA-Type)


- · Apply DALI signal between DA+ and DA-.
- DALI protocol comprises 16 groups and 64 addresses.
- First step is fixed at 8% of output.



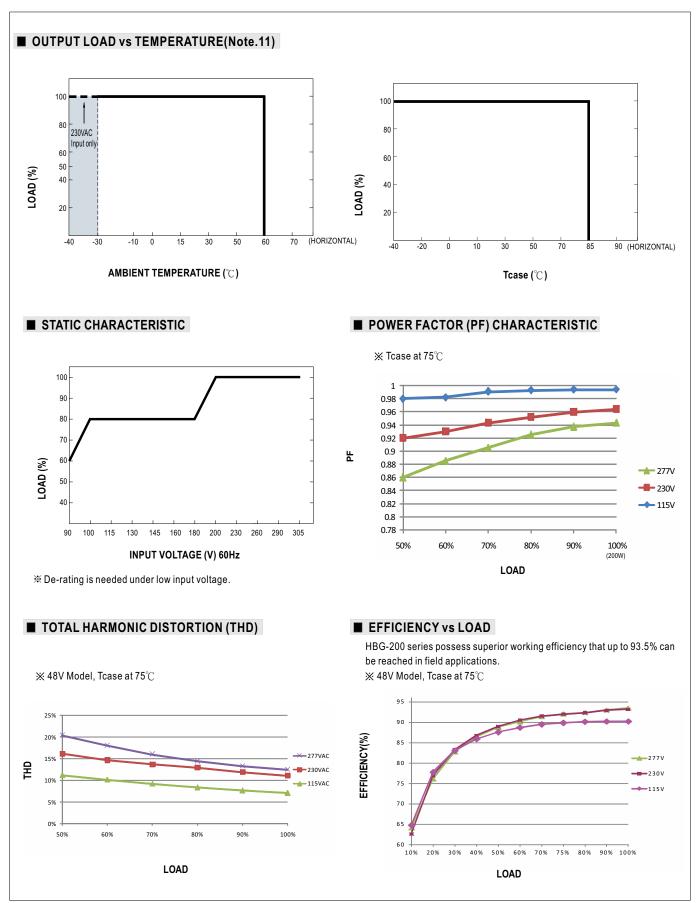




■ LIFE TIME

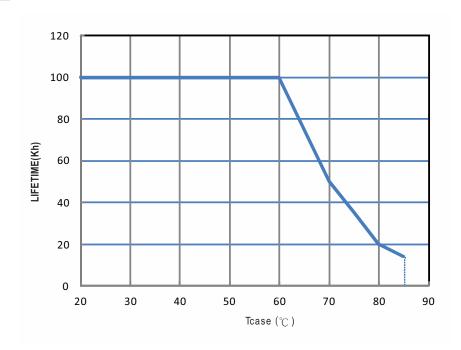


■ MECHANICAL SPECIFICATION Case No.211 Unit:mm ※ Blank-Type ψ 151.68 200±20 Vo+(Red) Vo-(Black) AC/L(Brown) AC/N(Blue) FG (Green/Yellow) SJTW 18AWG*2C SJTW 18AWG*3C • (tc): Max. Case Temperature.(case temperature measured point) • Ta: Ambient Temperature measured point **※ A-Type** 66.5 132 Vo+(Red) Vo-(Black) AC/L(Brown) AC/N(Blue) FG (Green/Yellow) SJTW 18AWG*2C SJTW 18AWG*3C • (tc): Max. Case Temperature.(case temperature measured point) • Ta: Ambient Temperature measured point ※ B/DA-Type 66.5 * DIM+ for B-Type DA+ for DA-Type

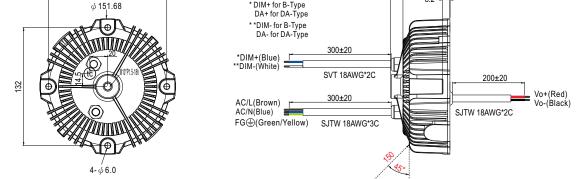


- (tc): Max. Case Temperature.(case temperature measured point) • Ta: Ambient Temperature measured point



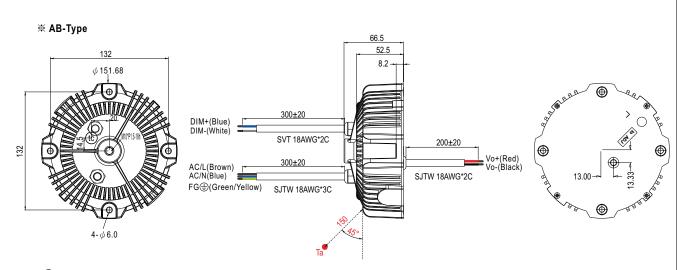

- (tc): Max. Case Temperature.(case temperature measured point)
- Ta: Ambient Temperature measured point

■ INSTALLATIONS

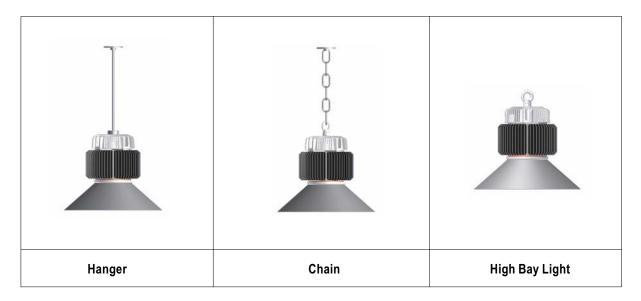

Caution

- * Please inspect the appearance of the driver if the package is damaged. There should not be any cracks.
- * Please do not drop or bump the driver.
- * All screws including the suspension screw should be paired with a spring washer and locked tight.
- * The entire luminaire, including the driver, should be limited to 10Kg or less.
- * The luminaire should be cautiously protected from damage due to shock throughout packaging and transportation.
- * Please thoroughly follow the preceding cautionary notes to prevent the luminaire from falling, leading to injuries.

■ INSTALLATION MANUAL

Please refer to: http://www.meanwell.com/manual.html