

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China










# HIL CONNECTOR

## 3.3mm pitch/Crimp style Wire-to-wire connectors

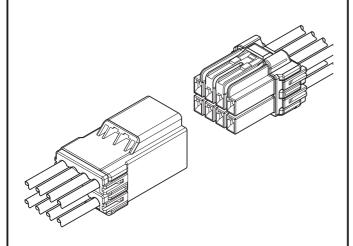

This HIL connector is 3.3mm pitch wire-towire connector that has a mechanism to prevent an incomplete mating when mating connector.

- Inertia lock mechanism to prevent an incomplete mating
- Box-shaped contact to prevent the influence by external forces
- Polarizing key to prevent connector from mating with incorrect circuits

## Specifications -

• Current rating: 5A AC, DC (2 circuits AWG #18)

Voltage rating: 300V AC, DC
Temperature range: -25°C to +85°C

(including temperature rise in applying

electrical current)

• Contact resistance: Initial value/10m max.

After environmental testing/20m max.

Insulation resistance: 1,000M min.
Withstanding voltage: 1,500V AC/minute

• Applicable wire: Conductor size/01 type AWG #24 to #20

/21 type AWG #22 to #18

Insulation O.D./01 type 1.3 to 2.5mm

/21 type 1.5 to 2.7mm

(when using retainer for 21 type 1.5 to 2.5mm)

- \* Compliant with RoHS.
- \* Refer to "General Instruction and Notice when using Terminals and Connectors" at the end of this catalog.
- \* Contact JST for details.


Note: The current rating varies depending on the number of circuits and the wire size used in each connector. The table below lists the current rating as a function of the number of circuits and the wire size.

#### Current unit: A


Circuits	Wire size (AWG)				
Gircuits	#18	#20	#22	#24	
2	5	4	3	3	
3	4	4	3	2	
4	3	3	2	2	
6	3	3	2	2	
8	3	3	2	2	

#### Assembly layout

#### <2, 3 circuits>

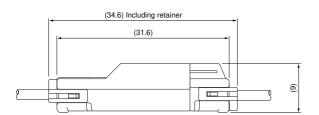

#### <4, 6, 8 circuits>

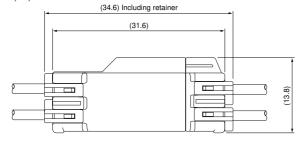


#### List of combinations

Resin color (Plug/ Receptacle)	Natural	Red	Blue		
Polarizing key pattern	Polarizing key pattern 1	Polarizing key pattern 2	Polarizing key pattern 3		
Plug Model No.	HILP-( )V-1-S	HILP-( )V-2-R	HILP-( )V-3-E		
Receptacle Model No.	HILR-( )VF-1-S	HILR-( )VF-2-R	HILR-( )VF-3-E		

# **HIL CONNECTOR**

#### Contact

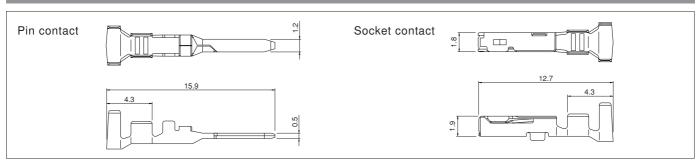

Model No.		Applica	ble wire	Insulation O.D. (mm)	O'tre / rool	
Pin contact	Socket contact	mm²	AWG #	insulation O.D. (IIIII)	Q´ty / reel	
SHIM-01T-P0.5	SHIF-01T-P0.5	0.2~0.5	24~20	1.3~2.5	5,000	
SHIM-21T-P0.5	SHIF-21T-P0.5	0.3~0.75	22~18	1.5~2.7	5,000	

#### Material and Finish

Copper alloy, tin-plated


#### RoHS compliance


Note: Insulation O.D. is 1.5mm to 2.5mm when using retainer for 21 type barrel size contact.


Contact	Crimping	Applicator			
Contact	machine	Crimp applicator	Dies	Crimp applicator with dies	
SHIM-01T-P0.5	AP-K2N	MKS-L	MK/SHIF/M-01-05	APLMK SHIF/M01-05	
SHIM-21T-P0.5	AP-NZIN		MK/SHIF/M-21-05	APLMK SHIF/M21-05	

	Contact	Crimping	Applicator			
Contact	Contact	machine	Crimp applicator	Dies	Crimp applicator with dies	
	SHIF-01T-P0.5	AP-K2N	MKS-L	MK/SHIF/M-01-05	APLMK SHIF/M01-05	
	SHIF-21T-P0.5	MF-NZIN	INIV2-F	MK/SHIF/M-21-05	APLMK SHIF/M21-05	

#### Contact position location numbers

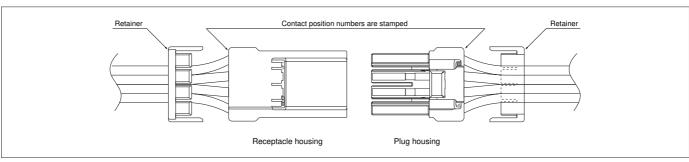

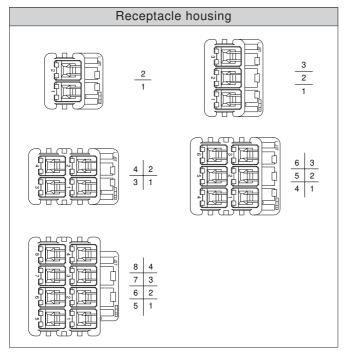

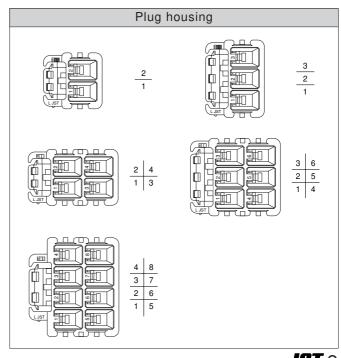

# **HIL CONNECTOR**

### Housing

Material: Housing...PA 66, UL94V-0, natural Retainer...Glass-filled PA 66, UL94V-0, natural

		_	netainerGlass-filled FA 66, 01947-0, flatura					
Circuits	Voltage rating	Current rating	Receptacle housing (for pin contact)	Plug housing (for socket contact)	Retainer			
2	300V	5A	HILR-02VF-1-S	Q´ty / bag	HILP-02V-1-S	Q'ty / bag	HILS-02V (commonly used for 2-circuit housing and 4-circuit housing)	Q'ty / bag
			HILR-03VF-1-S	Q'ty / bag	HILP-03V-1-S	Q'ty / bag	HILS-03V (commonly used for 3-circuit housing and 6-circuit housing)	Q'ty / bag
3	300V	4A	9 24.4	1,000	19.1	1,000	4.25	1,000
			HILR-04VF-1-S	Q'ty / bag	HILP-04V-1-S	Q'ty / bag	HILS-02V (commonly used for 2-circuit housing and 4-circuit housing)	Q'ty / bag
4	300V	3A 24.4	1,000	19.1	1,000	4.25	1,000	
			HILR-06VF-1-S	Q'ty / bag	HILP-06V-1-S	Q'ty / bag	HILS-03V (commonly used for 3-circuit housing and 6-circuit housing)	Q'ty / bag
6	300V	3A	13.8 24.4	500	19.1	1,000	4.25	1,000
			HILR-08VF-1-S	Q'ty / bag	HILP-08V-1-S	Q'ty / bag	HILS-04V	Q'ty / bag
8	300V	3A	13.8 24.4	500	19.1	1,000	4.25	1,000

RoHS compliance

Note: Current rating is for use with AWG #18 wire.