# imall

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832 Email & Skype: info@chipsmall.com Web: www.chipsmall.com Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





SEMICONDUCTOR®

HMA121 Series

HMA124

HMA2701 Series

HMAA2705

#### DESCRIPTION

The HMA124, HMA121 series and HMA2701 series consists of a gallium arsenide infrared emitting diode driving a silicon phototransistor in a compact 4-pin mini-flat package. The lead pitch is 2.54 mm.

The HMAA2705 consists of two gallium arsenide infrared emitting diodes, connected in inverse parallel, driving a single silicon phototransistor in a compact 4-pin mini-flat package. The lead pitch is 2.54mm.

#### FEATURES

- Compact 4-pin package
  (2.4 mm maximum standoff height)
- Current Transfer Ratio in selected groups HMA121: 50–600% HMA2701: 50–300% HMA121A: 100–300% HMA2701A: 150–300% HMA121B: 50–150% HMA2701B: 80–160% HMA121C: 100–200% HMA124: 100% MIN HMA121D: 50–100% HMA2705: 50–300% HMA121E: 150–300% HMA121F: 100–600%
- · Available in tape and reel quantities of 500 and 2500.
- Applicable to Infrared Ray reflow (230°C max, 30 seconds.)
- BSI (File #8611/8612), CSA (File #1162301), UL (File #E90700) and VDE (File #136480) certified
- Creepage ≥ 5 mm, typical 5.2 mm
- Clearance  $\geq$  5 mm, typical 5.2 mm

#### **APPLICATIONS**


HMAA2705

- AC line monitor
- Unknown polarity DC sensor
- Telephone line receiver

HMA121 series, HMA2701 series, HMA124


- Digital logic inputs
- Microprocessor inputs
- · Power supply monitor
- Twisted pair line receiver
- Telephone line receiver



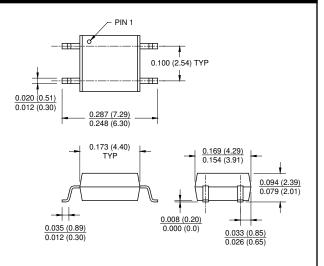

#### NOTE

All dimensions are in inches (millimeters)

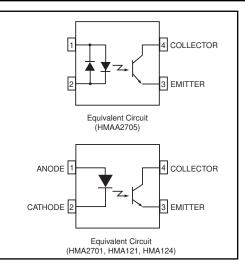



SEMICONDUCTOR®

**HMA121 Series** 

**HMA124** 

HMA2701 Series

| <b>ABSOLUTE MAXIMUM RATINGS</b> (T <sub>A</sub> = 25°C unless otherwise specified) |                          |                      |             |       |  |
|--|--------------------------|----------------------|-------------|-------|--|
| Parameter  |                          | Symbol               | Value       | Units |  |
| TOTAL PACKAGE  |                          |                      |             |       |  |
| Storage Temperature  | T <sub>STG</sub>         | -40 to +125          | °C          |       |  |
| Operating Temperature  |                          | T <sub>OPR</sub>     | -40 to +100 | °C    |  |
| EMITTER  |                          |                      |             |       |  |
| Continuous Forward Current   |                          | I <sub>F (avg)</sub> | 50          | mA    |  |
| Peak Forward Current (1 µs pulse, 30   | I <sub>F (pk)</sub>      | 1                    | A           |       |  |
| Reverse Input Voltage (HMA)  | V <sub>R</sub>           | 6                    | V           |       |  |
| Power Dissipation  |                          | P <sub>D</sub>       | 70          | mW    |  |
| Derate linearly (above 25°C)   |                          | ۰D                   | 0.65        | mW/°C |  |
| DETECTOR   |                          |                      |             |       |  |
| Continuous Collector Current   |                          |                      | 80          | mA    |  |
| Power Dissipation  |                          | P <sub>D</sub>       | 150         | mW    |  |
| Derate linearly (above 25°C)   |                          | ۲D                   | 2.0         | mW/°C |  |
| Collector Emitter Voltage  | HMA2701 Series, HMAA2705 | Vara                 | 40          | v     |  |
| Collector-Emitter Voltage  | HMA121 Series, HMA124    | V <sub>CEO</sub>     | 80          |       |  |
| Emitter-Collector Voltage  |                          | V <sub>ECO</sub>     | 7           | V     |  |



SEMICONDUCTOR®

#### HMA121 Series

**HMA124** 

#### HMA2701 Series

| ELECTRICAL CHARACTERISTICS (T <sub>A</sub> = 25°C) |   |                   |                |     |       |     |      |  |
|--|---|-------------------|----------------|-----|-------|-----|------|--|
| INDIVIDUAL COMPONENT CHARACTERISTICS               |   |                   |                |     |       |     |      |  |
| Parameter  | Test Conditions                             | Symbol            | Device         | Min | Тур** | Max | Unit |  |
| EMITTER  | (I <sub>F</sub> = 10 mA)                    |                   | HMA121 Series  | 1.0 |       | 1.2 |      |  |
| Forward Voltage                                    | (iF = 10 mA)                                | V                 | HMA124         | 1.0 |       | 1.3 | V    |  |
|  | (I <sub>F</sub> = 5 mA)                     | V <sub>F</sub>    | HMA2701 Series |     |       | 14  |      |  |
|  | (I <sub>F</sub> = ± 5 mA)                   |                   | HMAA2705       |     |       | 1.4 |      |  |
| Reverse Current                                    | (V <sub>R</sub> = 5 V)                      | I <sub>R</sub>    | HMA2701 Series |     |       | 5   | μΑ   |  |
|  |   |                   | HMA121 Series  |     |       |     |      |  |
|  |   |                   | HMA124         |     |       |     |      |  |
| DETECTOR   |   |                   | HMA121 Series  | 80  |       |     |      |  |
| Breakdown Voltage                                  | (I <sub>C</sub> = 1 mA, I <sub>F</sub> = 0) | BV <sub>CEO</sub> | HMA124         | 00  |       |     |      |  |
| Collector to Emitter                               | (1C - 1 111A, 1F - 0)                       | DICEO             | HMA2701 Series | 40  |       |     | V    |  |
|  |   |                   | HMAA2705       | 40  |       |     |      |  |
| Emitter to Collector                               | $(I_E = 100 \ \mu A, \ I_F = 0)$            | BV <sub>ECO</sub> | All            | 7   |       |     |      |  |
| Collector Dark Current                             | $(V_{CE} = 40 \text{ V}, I_{F} = 0)$        | I <sub>CEO</sub>  | All            |     |       | 100 | nA   |  |
| Capacitance  | (V <sub>CE</sub> = 0 V, f = 1 MHz)          | C <sub>CE</sub>   | All            |     | 10    |     | pF   |  |



SEMICONDUCTOR®

#### HMA121 Series

**HMA124** 

#### HMA2701 Series

#### HMAA2705

| <b>TRANSFER CHARACTERISTICS</b> ( $T_A = 25^{\circ}C$ )                                       |   |                       |          |     |       |      |      |  |
|---|---|-----------------------|----------|-----|-------|------|------|--|
| Characteristic  | Test Conditions   | Symbol                | Device   | Min | Typ** | Max  | Unit |  |
|   | $(I_F = \pm 5 \text{ mA}, V_{CE} = 5 \text{ V})$                        |                       | HMAA2705 | 50  |       | 300  |      |  |
|   |   |                       | HMA2701  | 50  |       | 300  | -    |  |
|   | (I <sub>F</sub> = 5 mA, V <sub>CE</sub> = 5 V)                          |                       | HMA2701A | 150 |       | 300  |      |  |
|   |   |                       | HMA2701B | 80  |       | 160  |      |  |
|   |   |                       | HMA121   | 50  |       | 600  |      |  |
|   |   |                       | HMA121A  | 100 |       | 300  |      |  |
|   |   | OTD                   | HMA121B  | 50  |       | 150  | 0/   |  |
| DC Current Transfer Ratio   | $(I_F = 5 \text{ mA}, V_{CE} = 5 \text{ V})$                            | CTR                   | HMA121C  | 100 |       | 200  | %    |  |
|   |   |                       | HMA121D  | 50  |       | 100  | -    |  |
|   |   |                       | HMA121E  | 150 |       | 300  |      |  |
|   |   |                       | HMA121F  | 100 |       | 600  |      |  |
|   | (I <sub>F</sub> = 1 mA, V <sub>CE</sub> = 0.4 V)                        |                       | HMA121F  | 30  |       |      |      |  |
|   | (I <sub>F</sub> = 1 mA, V <sub>CE</sub> = 0.5 V)                        |                       | HMA124   | 100 |       | 1200 |      |  |
|   | $(I_F = 0.5 \text{ mA}, V_{CE} = 1.5 \text{ V})$                        |                       | HMA124   | 50  |       |      |      |  |
| CTR Symmetry  | $(I_F = \pm 5 \text{ mA}, V_{CE} = 5 \text{ V})$                        | _                     | HMAA2705 | 0.3 |       | 3.0  |      |  |
|   | $(I_F = \pm 10 \text{ mA}, I_C = 2 \text{ mA})$                         | V <sub>CE (SAT)</sub> | HMAA2705 |     |       | 0.3  | V    |  |
|   | (I <sub>F</sub> = 10 mA, I <sub>C</sub> = 2 mA)                         |                       | HMA2701  |     |       | 0.3  |      |  |
|   |   |                       | HMA2701A |     |       | 0.3  |      |  |
|   |   |                       | HMA2701B |     |       | 0.3  |      |  |
|   | (I <sub>F</sub> = 8 mA, I <sub>C</sub> = 2.4 mA)                        |                       | HMA121   |     |       | 0.4  |      |  |
|   |   |                       | HMA121A  |     |       | 0.4  |      |  |
| Saturation Voltage  |   |                       | HMA121B  |     |       | 0.4  |      |  |
|   |   |                       | HMA121C  |     |       | 0.4  |      |  |
|   |   |                       | HMA121D  |     |       | 0.4  |      |  |
|   |   |                       | HMA121E  |     |       | 0.4  |      |  |
|   |   |                       | HMA121F  |     |       | 0.4  |      |  |
|   | $(I_F = 1 \text{ mA}, I_C = 0.2 \text{ mA})$                            |                       | HMA121F  |     |       | 0.4  |      |  |
|   | $(I_F = 1 \text{ mA}, I_C = 0.5 \text{ mA})$                            |                       | HMA124   |     |       | 0.4  |      |  |
| Rise Time (Non-Saturated) $(I_C = 2 \text{ mA}, V_{CE} = 5 \text{ V})$<br>$(R_L = 100\Omega)$ |   | t <sub>r</sub>        |          |     | 3     |      |      |  |
| Fall Time (Non-Saturated)   | $(I_{C} = 2 \text{ mA}, V_{CE} = 5 \text{ V})$<br>$(R_{L} = 100\Omega)$ | t <sub>f</sub>        |          |     | 3     |      | μs   |  |

| ISOLATION CHARACTERISTICS      |                 |                  |        |      |       |     |      |
|--------------------------------|-----------------|------------------|--------|------|-------|-----|------|
| Characteristic                 | Test Conditions | Symbol           | Device | Min  | Тур** | Max | Unit |
| Steady State Isolation Voltage | (1 Minute)      | V <sub>ISO</sub> | All    | 3750 |       |     | VRMS |

\*\* All typicals at TA = 25°C



#### HMA121 Series

HMA124

#### HMA2701 Series

#### HMAA2705

#### **TYPICAL PERFORMANCE CURVES**

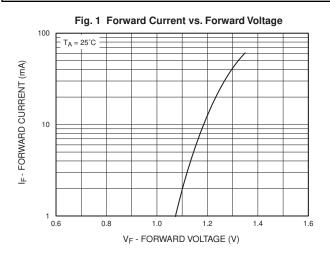


Fig. 3 Current Transfer Ratio vs. Forward Current




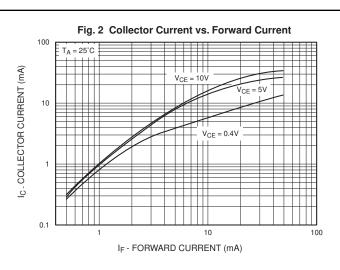


Fig. 4 Collector Current vs. Temperature



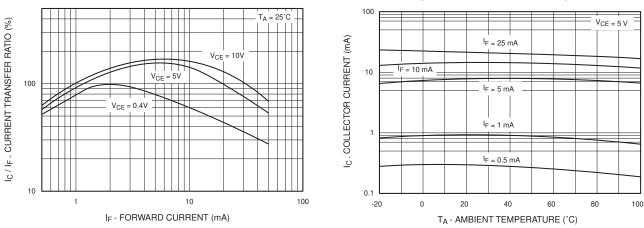



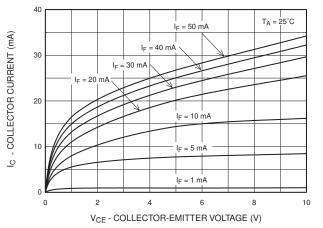

#### HMA121 Series

HMA124

#### HMA2701 Series

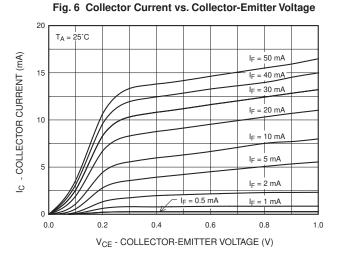


Fig. 8 Switching Time vs. Load Resistance

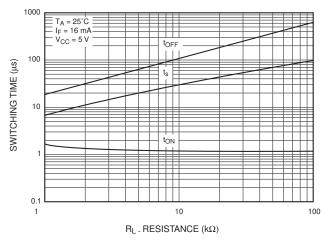


Fig. 7 Collector Dark Current vs. Temperature


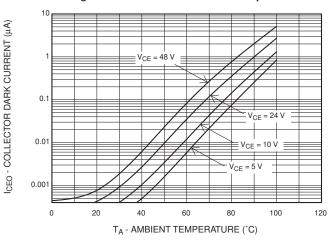


Fig. 9 Collector-Emitter Saturation Voltage vs. Temperature



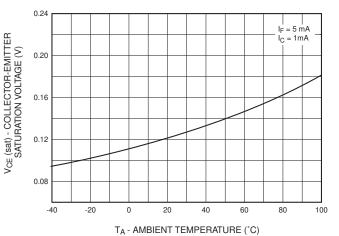

#### HMA121 Series

**HMA124** 


#### HMA2701 Series

#### HMAA2705

#### **ORDERING INFORMATION**

| Option | Description  |  |  |
|--------|--|--|--|
| V      | VDE Approved   |  |  |
| R1     | Tape and Reel (500 units)                                      |  |  |
| R2     | Tape and Reel (2500 units)                                     |  |  |
| R3     | Tape and Reel (500 units; unit 180° rotated)                   |  |  |
| R4     | Tape and Reel (2500 units; unit 180° rotated)                  |  |  |
| R1V    | Tape and Reel (500 units) and VDE Approved                     |  |  |
| R2V    | Tape and Reel (2500 units) and VDE Approved                    |  |  |
| R3V    | Tape and Reel (500 units; unit 180° rotated) and VDE Approved  |  |  |
| R4V    | Tape and Reel (2500 units; unit 180° rotated) and VDE Approved |  |  |

#### MARKING INFORMATION

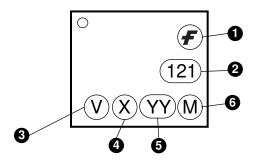


| Definitions |  |  |  |  |
|-------------|--|--|--|--|
| 1           | Fairchild logo   |  |  |  |
| 2           | Device number  |  |  |  |
| 3           | VDE mark (Note: Only appears on parts ordered with VDE option – See order entry table) |  |  |  |
| 4           | One digit year code  |  |  |  |
| 5           | Two digit work week ranging from '01' to '53'  |  |  |  |
| 6           | Assembly package code  |  |  |  |



#### HMA121 Series

#### HMA124

#### HMA2701 Series

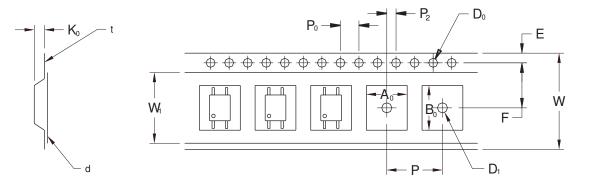


|                                 |                  |                | 2.54 Pitch      |
|---------------------------------|------------------|----------------|-----------------|
| Description                     |                  | Symbol         | Dimensions (mm) |
| Tape Width                      |                  | W              | 12.00±0.4       |
| Tape Thickness                  |                  | t              | 0.30±0.20       |
| Sprocket Hole Pitch             |                  | ₽õ             | 4.00±0.20       |
| Sprocket Hole Dia.              |                  | Do             | 1.55±0.20       |
| Sprocket Hole Location          |                  | E              | 1.75±0.20       |
| Pocket Location                 |                  | F              | 5.50±0.20       |
|                                 |                  | P <sub>2</sub> | 2.00±0.20       |
| Pocket Pitch                    |                  | Р              | 8.00±0.20       |
| Pocket Dimension                | Pocket Dimension |                | 4.40±0.20       |
|                                 |                  | B <sub>0</sub> | 7.30±0.20       |
|                                 |                  | K <sub>0</sub> | 2.30±0.20       |
| Pocket Hole Dia.                |                  | D <sub>1</sub> | 1.55±0.20       |
| Cover Tape Width                |                  | W <sub>1</sub> | 9.20            |
| Cover Tape Thickness            |                  | d              | 0.065±0.02      |
| Max. Component Rotation or Tilt |                  |                | 20° max         |
| Devices Per Reel R1             |                  |                | 500             |
|                                 | R2               |                | 2500            |
| Reel Diameter                   | R1               |                | 178 mm (7")     |
|                                 |                  |                | 330 mm (13")    |




#### HMA121 Series

HMA124

#### HMA2701 Series

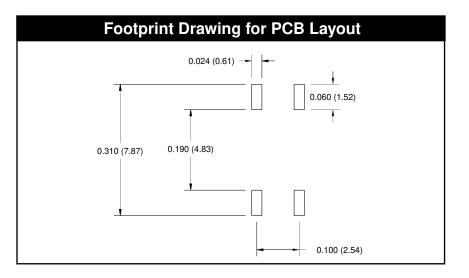

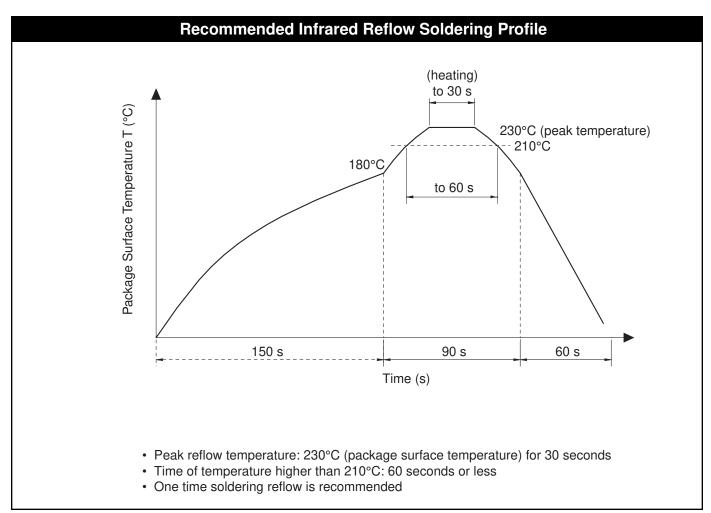



SEMICONDUCTOR®

#### HMA121 Series

**HMA124** 

HMA2701 Series

#### HMAA2705

#### DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

#### LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

- Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
- 2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.