

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



# Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China







# ICB12, ICB18 and ICB30 4-wire DC



## Proximity inductive sensors with complementary output function





ICB series is a complete family of high performance inductive sensors and represents Carlo Gavazzi standard solution for industrial automation equipments.

It is available in three diameters: M12, M18 and M30, in standard and extended sensing ranges, long and short rugged nickel-plated brass housings.

#### **Benefits**

- A complete family. Available in M12, M18 and M30 housings with an operating distance from 2 to 22 mm.
- Less machine downtime. Lower risk of mechanical damage thanks to the extended range sensors with 2 times the standard operating distance.
- Easy to install. ICB sensors have a milled section for wrench grip and two different thread lengths. The user can choose between 2 m PVC cable and M12-disconnect plug versions.
- High precision. The onboard advanced microcontroller ensures better stability with respect to environmental influences, with highly repeatable measurements between -25 and +70°C.
- Easy customization to specific OEM requests.
   Special sensing distance and timing functions or pigtail solutions with special cables and connectors are possible on request.
- **Product traceability**. Permanently legible part number and serial number, laser engraved on the plastic cap, guarantee the traceability of every sensor.



#### **Main functions**

- · Non contact detection of metal objects in general position-sensing and presence-sensing in industrial applications
- · Particularly suitable for rotational speed monitoring thanks to the high operating frequency
- Simultaneous availability of both make and break switching functions with maximum connection flexibility to the control unit
- · Integrated diagnostic function with LED flashing in the event of a short circuit or overload



# References



Enter the code, replacing the symbol  $\square$  with the selected option (e.g.: ICB12S30F04NAM1).

Code	Option	Description
I	-	Inductive sensor
С	-	Cylindrical housing
В	-	Nickel-plated brass housing
	12	M12 housing
	18	M18 housing
	30	M30 housing
	S30	Short housing with thread length of 30 mm
	L50	Long housing with thread length of 50 mm
	F	Flush
	N	Non-flush
	-	Sensing distance [mm] E.g. 04 = 4mm; 14 = 14mm
	02 or 04 or	ICB12 flush: 2mm (standard range) or 4mm (extended range)
	08	ICB12 non-flush: 4mm (standard range) or 8mm (extended range)
	05 or 08 or	( ) ( )
	14	ICB18 non-flush: 8mm (standard range) or 14mm (extended range)
	10 or 15 or	
	22	ICB30 non-flush: 15mm (standard range) or 22mm (extended range)
	N	NPN
	Р	PNP
Α	-	Output: N.O. and N.C.
	-	2 m cable
	M1	M12 plug

Additional characters can be used for customized versions.





# Type selection

#### M12 Standard and extended range

Connection	Body style	Detection	Output	Ordering no.	Ordering no.
		principle	type	Standard range	Extended range
		Flush	NPN	ICB12S30F02NA	ICB12S30F04NA
Cable			PNP	ICB12S30F02PA	ICB12S30F04PA
Cable		Non-flush	NPN	ICB12S30N04NA	ICB12S30N08NA
	-Short	NOH-HUSH	PNP	ICB12S30N04PA	ICB12S30N08PA
	SHOIL	Eluch	NPN	ICB12S30F02NAM1	ICB12S30F04NAM1
Dlug		Flush	PNP	ICB12S30F02PAM1	ICB12S30F04PAM1
Plug		Non-flush	NPN	ICB12S30N04NAM1	ICB12S30N08NAM1
			PNP	ICB12S30N04PAM1	ICB12S30N08PAM1
	Long	Flush	NPN	ICB12L50F02NA	ICB12L50F04NA
Cable			PNP	ICB12L50F02PA	ICB12L50F04PA
Cable		Non-flush	NPN	ICB12L50N04NA	ICB12L50N08NA
		NOH-HUSH	PNP	ICB12L50N04PA	ICB12L50N08PA
		Flush	NPN	ICB12L50F02NAM1	ICB12L50F04NAM1
Dlug			PNP	ICB12L50F02PAM1	ICB12L50F04PAM1
Plug		Non-flush NPN PNP	NPN	ICB12L50N04NAM1	ICB12L50N08NAM1
			PNP	ICB12L50N04PAM1	ICB12L50N08PAM1

### M18 Standard and extended range

Connection	Body style	Detection	Output	Ordering no.	Ordering no.
		principle	type	Standard range	Extended range
		Flush	NPN	ICB18S30F05NA	ICB18S30F08NA
Cable			PNP	ICB18S30F05PA	ICB18S30F08PA
Cable		Non-flush	NPN	ICB18S30N08NA	ICB18S30N14NA
	Short	Non-liusn	PNP	ICB18S30N08PA	ICB18S30N14PA
	SHOIL	Eluch	NPN	ICB18S30F05NAM1	ICB18S30F08NAM1
Dlug		Flush	PNP	ICB18S30F05PAM1	ICB18S30F08PAM1
Plug		Non-flush	NPN	ICB18S30N08NAM1	ICB18S30N14NAM1
			PNP	ICB18S30N08PAM1	ICB18S30N14PAM1
		Flush	NPN	ICB18L50F05NA	ICB18L50F08NA
Cable			PNP	ICB18L50F05PA	ICB18L50F08PA
Cable		Non-flush	NPN	ICB18L50N08NA	ICB18L50N14NA
			PNP	ICB18L50N08PA	ICB18L50N14PA
	Long	Flush	NPN	ICB18L50F05NAM1	ICB18L50F08NAM1
Dive			PNP	ICB18L50F05PAM1	ICB18L50F08PAM1
Plug		Non-flush NPN	NPN	ICB18L50N08NAM1	ICB18L50N14NAM1
			PNP	ICB18L50N08PAM1	ICB18L50N14PAM1




## M30 Standard and extended range

Connection	Body style	Detection	Output	Ordering no.	Ordering no.
Connection	Body Style	principle	type	Standard range	Extended range
		Flush	NPN	ICB30S30F10NA	ICB30S30F15NA
Cable			PNP	ICB30S30F10PA	ICB30S30F15PA
Cable		Non-flush	NPN	ICB30S30N15NA	ICB30S30N22NA
	Chart	Non-liusn	PNP	ICB30S30N15PA	ICB30S30N22PA
	——Short	Fluch	NPN	ICB30S30F10NAM1	ICB30S30F15NAM1
Dleas		Flush	PNP	ICB30S30F10PAM1	ICB30S30F15PAM1
Plug		Non-flush	NPN	ICB30S30N15NAM1	ICB30S30N22NAM1
			PNP	ICB30S30N15PAM1	ICB30S30N22PAM1
		Flush	NPN	ICB30L50F10NA	ICB30L50F15NA
Cable			PNP	ICB30L50F10PA	ICB30L50F15PA
Cable		Non-flush	NPN	ICB30L50N15NA	ICB30L50N22NA
			PNP	ICB30L50N15PA	ICB30L50N22PA
Plug	Long	Flush	NPN	ICB30L50F10NAM1	ICB30L50F15NAM1
			PNP	ICB30L50F10PAM1	ICB30L50F15PAM1
		Non-flush NPN PNP	NPN	ICB30L50N15NAM1	ICB30L50N22NAM1
			PNP	ICB30L50N15PAM1	ICB30L50N22PAM1



# **Structure**

#### ICB12

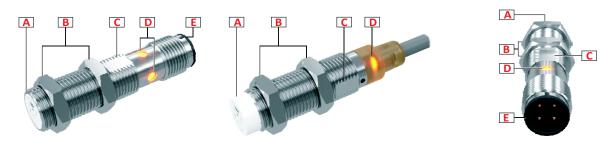

Element	Component	Function
Α	Sensing face	Flush or non-flush
В	2 nuts	For sensor mounting
С	Milled section	For wrench grip
D	LED	Yellow LED: Output flashing: short circuit or overload indication
E	M12 x 1, 4 pin, male connector	For plug versions only

### ICB18




Element	Component	Function
Α	Sensing face	Flush or non-flush
В	2 nuts	For sensor mounting
С	Milled section	For wrench grip
D	LED	Yellow LED: Output flashing: short circuit or overload indication
E	M12 x 1, 4 pin, male connector	For plug versions only



#### ICB30







Element	Component	Function
Α	Sensing face	Flush or non-flush
В	2 nuts	For sensor mounting
D	LED	Yellow LED: Output flashing: short circuit or overload indication
E	M12 x 1, 4 pin, male connector	For plug versions only



# Sensing


# D

#### **Detection**

Rated operating distance S <sub>n</sub>	2 to 22 mm: depending on housing diameter and version (flush or non-flush; standard or extended range)		
Reference target	The operating distance is measured according to IEC 60947-5-2, using a standard target moving axially.  This target is square shape 1 mm thickness, made of steel e.g. type Fe 360 as defined in ISO 630 and it shall be of the rolled finish.  The length of the side of the square is equal to  – the diameter of the circle inscribed on the active surface of the sensing face, or  – three times the rated operating distance S <sub>n</sub> whichever is greater		
Assured operating sensing distance (S <sub>a</sub> )	$0 \le S_a \le 0.81 \times S_n$ (e.g. with $S_n$ of 15 mm, $S_a$ is 0 12.15 mm)		
Effective operating distance (S <sub>r</sub> )	$0.9 \times S_n \le S_r \le 1.1 \times S_n$		
Usable operating distance (S <sub>u</sub> )	$0.9 \times S_r \le S_u \le 1.1 \times S_r$		
Hysteresis (H)	120%		

#### **Correction factors**

The specific operating distance  $S_n$  refers to defined measuring conditions. The following data have to be considered as general guidelines.



**Fig. 1** The rated operating distance is reduced by the use of metals and alloys other than Fe360. The most important reduction factors for inductive proximity sensors are shown in the figure.

Fe360 : Steel

CrNi: Chrome-nickel

CuZn : Brass Al : Aluminium Cu : Copper

Sr: Effective operating distance

#### Accuracy

Repeat accuracy (R)	≤ 10%



# **Features**



## Power Supply

Rated operational voltage (U <sub>b</sub> )	10 to 36 VDC (ripple included)
Ripple (U <sub>rop</sub> )	≤ 10%
No load supply current (I <sub>o</sub> )	≤ 16 mA
Power ON delay (t <sub>v</sub> )	≤ 50 ms



# Outputs

Output functions	NPN or PNP by sensor type	Open collector		
Output configuration	N.O. and N.C.	Complementary		
Output current (I <sub>e</sub> )	Output current (I <sub>e</sub> ) ≤ 200 mA @ 50°C; ≤ 150 mA @ 5070°C			
OFF-state current (I <sub>r</sub> )	≤ 50 µA	≤ 50 µA		
Voltage drop (U <sub>d</sub> )	Max. 2.5 VDC @ 200 mA	Max. 2.5 VDC @ 200 mA		
Protection	Short-circuit, reverse polarity ar	nd transients		
Voltage transient	1 kV/0.5 J	1 kV/0.5 J		



### Response times

	≤ 2000 Hz	ICB12
Operating frequency (f)	≤ 1500 Hz	ICB18
	≤ 1000 Hz	ICB30



## Indication

Yellow LED	Output	Description
OFF	OFF	N.O. output, target not present
		N.C. output, target present
ON	ON	N.O. output, target present
		N.C. output, target not present
Blinking (f = 2 Hz)		Short-circuit or overload



### Environmental

Auchieut teurneugtung	Operating: -25° to +70°C (-13° to +158°F)	
Ambient temperature	Storage: -30° to +80°C (-22° to +176°F)	
Ambient temperature	Operating: -40° to +70°C (-40° to +158°F)	
ICB30 plug version only	Storage: -40° to +80°C (-40° to +176°F)	
Vibration	10 to 55 Hz, amplitude 1.0 mm; sweep cycle 5 min; in X, Y and Z direction	IEC 60068-2-6
Shock	30 G /11 ms. 10 shocks in X, Y and Z direction	IEC 60068-2-27
Degree of protection	IP67	IEC 60529; EN 60947-1



# Compatibility and conformity

	IEC 61000-4-2 Electrostatic dis-	8 kV air discharge
	charge	4 kV contact discharge
	IEC 61000-4-3 Radiated radiofre-	3 V/m
	quency	
EMC protection	IEC 61000-4-4 Burst immunity	2 kV
	IEC 61000-4-6 Conducted radio	3 V
	frequency	
	IEC 61000-4-8 Power frequency	30 A/m
	magnetic fields	30 A/111
MTTF <sub>d</sub>	M12: 750 years @ 50°C (122°F);	
	M18, M30: 850 years @ 50°C (122°F)	
Approvals		
	CCC is not required for products ra	ated ≤ 36 V

## Mechanical data


Weight (including 2 puts) may	Cable version: M12 120 g; M18 150 g; M30 185 g	
Weight (including 2 nuts) max.	Plug version: M12 30 g; M18 70 g, M30 195 g	
Mounting	Flush or non flush mountable	
Material	Housing: Nickel-plated brass	
wateriai	Front cap: Grey thermoplastic polyester	
	ICB12: 10 Nm	
Max tightening torque	ICB18 Non-flush version: 25 Nm; Flush version: from 0 to 7 mm: 20	
wax ugntening torque	Nm; > 7 mm: 25 Nm	
	ICB30: 25 Nm	

## Electrical connection

Cable	ICB12 & ICB18: 2m, 4 x 0.25 mm², Ø4.4 mm, PVC, grey, oil proof	
Cable	ICB30: 2m, 4 x 0.34 mm <sup>2</sup> , Ø5.2 mm, PVC, grey, oil proof	
Plug	M12 x 1, 4 pin, male connector	



# **Connection Diagrams**

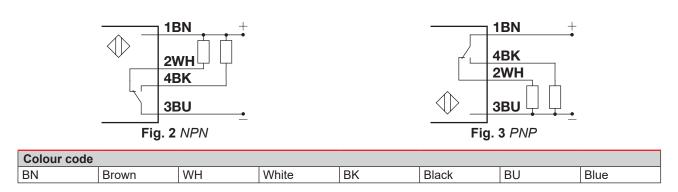

Wire colors in accordance with EN 60947-5-2



# **Dimensions**

# ICB12 [mm]




Fig. 4 Short body, flush version, cable



Fig. 6 Short body, flush version, plug




Fig. 8 Long body, flush version, cable




Fig. 10 Long body, flush version, plug




Fig. 5 Short body, non-flush version, cable




Fig. 7 Short body, non-flush version, plug




Fig. 9 Long body, non-flush version, cable




Fig. 11 Long body, non-flush version, plug



## ICB18 [mm]




Fig. 12 Short body, flush version, cable




Fig. 14 Short body, flush version, plug




Fig. 16 Long body, flush version, cable




Fig. 18 Long body, flush version, plug




Fig. 13 Short body, non-flush version, cable




Fig. 15 Short body, non-flush version, plug




Fig. 17 Long body, non-flush version, cable




Fig. 19 Long body, non-flush version, plug



### ICB30 [mm]




Fig. 20 Short body, flush version, cable




Fig. 22 Short body, flush version, plug




Fig. 24 Long body, flush version, cable




Fig. 26 Long body, flush version, plug




Fig. 21 Short body, non-flush version, cable




Fig. 23 Short body, non-flush version, plug




Fig. 25 Long body, non-flush version, cable




Fig. 27 Long body, non-flush version, plug



# Installation

## M12, M18 and M30 flush




Fig. 28 Flush sensor, when installed in damping material




Fig. 29 Flush sensors, when installed together in damping material

#### M12 and M18 non-flush




Fig. 30 Non-flush sensor, when installed in damping material




Fig. 31 Non-flush sensors, when installed together in damping material



## M30 non-flush

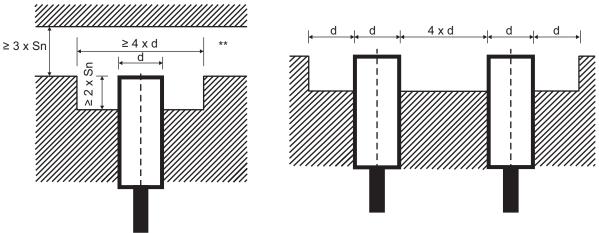


Fig. 32 Non-flush sensor, when installed in damping material

Fig. 33 Non-flush sensor, when installed together in damping material

### Sensors installed opposite each other




Fig. 34 For sensors installed opposite each other, a minimum space of 6 x Sn (the nominal sensing distance) must be observed

S<sub>n</sub>: nominal sensing distance

d: sensor diameter (12 mm for ICB12, 18 mm for ICB18, 30 mm for ICB30)

<sup>\*\*</sup> Free zone or non-damping material



# **Delivery contents and compatible components**



#### **Delivery contents**

- · Inductive proximity switch
- 2 nuts
- · Packaging: plastic bag



#### **CARLO GAVAZZI compatible components**

- Mounting bracket AMB... to be purchased separately
- Connector type: CO..54NF... series to be purchased separately



COPYRIGHT ©2017 Content subject to change. Download the PDF: www.productselection.net