



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



OptiMOS[®] -T2 Power-Transistor

Product Summary

| | | |
|--------------------------------|------|----|
| V_{DS} | 30 | V |
| $R_{DS(on),max}$ (SMD version) | 14.6 | mΩ |
| I_D | 22 | A |


Features

- N-channel - Enhancement mode
- Automotive AEC Q101 qualified
- MSL1 up to 260°C peak reflow
- 175°C operating temperature
- Green product (RoHS compliant)
- Ultra low Rds(on)
- 100% Avalanche tested

PG-TO263-3-2 PG-TO262-3-1 PG-TO220-3-1



| Type | Package | Marking |
|----------------|--------------|---------|
| IPB22N03S4L-15 | PG-TO263-3-2 | 4N03L15 |
| IPI22N03S4L-15 | PG-TO262-3-1 | 4N03L15 |
| IPP22N03S4L-15 | PG-TO220-3-1 | 4N03L15 |


Maximum ratings, at $T_j=25\text{ °C}$, unless otherwise specified

| Parameter | Symbol | Conditions | Value | Unit |
|--|----------------|--|--------------|------|
| Continuous drain current ¹⁾ | I_D | $T_C=25\text{ °C}$, $V_{GS}=10\text{ V}$ | 22 | A |
| | | $T_C=100\text{ °C}$, $V_{GS}=10\text{ V}^{2)}$ | 22 | |
| Pulsed drain current ²⁾ | $I_{D,pulse}$ | $T_C=25\text{ °C}$ | 88 | |
| Avalanche energy, single pulse | E_{AS} | $I_D=22\text{ A}$ | 20 | mJ |
| Avalanche current, single pulse | I_{AS} | $T_C=25\text{ °C}$ | 22 | A |
| Gate source voltage | V_{GS} | | ±16 | V |
| Power dissipation | P_{tot} | $T_C=25\text{ °C}$ | 31 | W |
| Operating and storage temperature | T_j, T_{stg} | | -55 ... +175 | °C |
| IEC climatic category; DIN IEC 68-1 | | | 55/175/56 | |

| Parameter | Symbol | Conditions | Values | | | Unit |
|--|------------|--|--------|------|------|------|
| | | | min. | typ. | max. | |
| Thermal characteristics²⁾ | | | | | | |
| Thermal resistance, junction - case | R_{thJC} | | - | - | 4.9 | K/W |
| Thermal resistance, junction - ambient, leaded | R_{thJA} | | - | - | 62 | |
| SMD version, device on PCB | R_{thJA} | minimal footprint | - | - | 62 | |
| | | 6 cm ² cooling area ³⁾ | - | - | 40 | |

Electrical characteristics, at $T_j=25\text{ }^\circ\text{C}$, unless otherwise specified
Static characteristics

| | | | | | | |
|----------------------------------|---------------|---|-----|------|------|---------------|
| Drain-source breakdown voltage | $V_{(BR)DSS}$ | $V_{GS}=0\text{ V}, I_D=1\text{ mA}$ | 30 | - | - | V |
| Gate threshold voltage | $V_{GS(th)}$ | $V_{DS}=V_{GS}, I_D=10\text{ }\mu\text{A}$ | 1.0 | 1.5 | 2.2 | |
| Zero gate voltage drain current | I_{DSS} | $V_{DS}=30\text{ V}, V_{GS}=0\text{ V}, T_j=25\text{ }^\circ\text{C}$ | - | 0.01 | 1 | μA |
| | | $V_{DS}=30\text{ V}, V_{GS}=0\text{ V}, T_j=125\text{ }^\circ\text{C}^{2)}$ | - | 10 | 1000 | |
| | | $V_{DS}=18\text{ V}, V_{GS}=0\text{ V}, T_j=85\text{ }^\circ\text{C}^{2)}$ | - | 5 | 60 | |
| Gate-source leakage current | I_{GSS} | $V_{GS}=16\text{ V}, V_{DS}=0\text{ V}$ | - | 1 | 100 | nA |
| Drain-source on-state resistance | $R_{DS(on)}$ | $V_{GS}=4.5\text{ V}, I_D=11\text{ A}$ | - | 17.5 | 19.8 | m Ω |
| | | $V_{GS}=4.5\text{ V}, I_D=11\text{ A},$ SMD version | - | 17.2 | 19.5 | |
| | | $V_{GS}=10\text{ V}, I_D=22\text{ A}$ | - | 12.7 | 14.9 | |
| | | $V_{GS}=10\text{ V}, I_D=22\text{ A},$ SMD version | - | 12.4 | 14.6 | |

| Parameter | Symbol | Conditions | Values | | | Unit |
|-----------|--------|------------|--------|------|------|------|
| | | | min. | typ. | max. | |

Dynamic characteristics²⁾

| | | | | | | |
|------------------------------|--------------|---|---|-----|-----|----|
| Input capacitance | C_{iss} | $V_{GS}=0\text{ V}, V_{DS}=25\text{ V},$ $f=1\text{ MHz}$ | - | 750 | 980 | pF |
| Output capacitance | C_{oss} | | - | 190 | 250 | |
| Reverse transfer capacitance | C_{rss} | | - | 10 | 20 | |
| Turn-on delay time | $t_{d(on)}$ | $V_{DD}=15\text{ V}, V_{GS}=10\text{ V},$ $I_D=22\text{ A}, R_G=3.5\ \Omega$ | - | 3 | - | ns |
| Rise time | t_r | | - | 2 | - | |
| Turn-off delay time | $t_{d(off)}$ | | - | 12 | - | |
| Fall time | t_f | | - | 2 | - | |

Gate Charge Characteristics²⁾

| | | | | | | |
|-----------------------|---------------|--|---|-----|----|----|
| Gate to source charge | Q_{gs} | $V_{DD}=24\text{ V}, I_D=22\text{ A},$ $V_{GS}=0\text{ to }10\text{ V}$ | - | 2.2 | 3 | nC |
| Gate to drain charge | Q_{gd} | | - | 1.4 | 3 | |
| Gate charge total | Q_g | | - | 11 | 14 | |
| Gate plateau voltage | $V_{plateau}$ | | - | 3.4 | - | V |

Reverse Diode

| | | | | | | |
|--|---------------|---|-----|------|-----|----|
| Diode continuous forward current ²⁾ | I_S | $T_C=25\text{ }^\circ\text{C}$ | - | - | 22 | A |
| Diode pulse current ²⁾ | $I_{S,pulse}$ | | - | - | 88 | |
| Diode forward voltage | V_{SD} | $V_{GS}=0\text{ V}, I_F=22\text{ A},$ $T_j=25\text{ }^\circ\text{C}$ | 0.6 | 0.95 | 1.3 | V |
| Reverse recovery time ²⁾ | t_{rr} | $V_R=15\text{ V}, I_F=I_S,$ $di_F/dt=100\text{ A}/\mu\text{s}$ | - | 12 | - | ns |
| Reverse recovery charge ²⁾ | Q_{rr} | | - | 10 | - | |


¹⁾ Current is limited by bondwire; with an $R_{thJC} = 4.9\text{K/W}$ the chip is able to carry 36A at 25°C. For detailed information see Application Note ANPS071E at www.infineon.com/optimos

²⁾ Defined by design. Not subject to production test.

³⁾ Device on 40 mm x 40 mm x 1.5 mm epoxy PCB FR4 with 6 cm² (one layer, 70 μm thick) copper area for drain connection. PCB is vertical in still air.


1 Power dissipation

$P_{tot} = f(T_C); V_{GS} \geq 6 V$

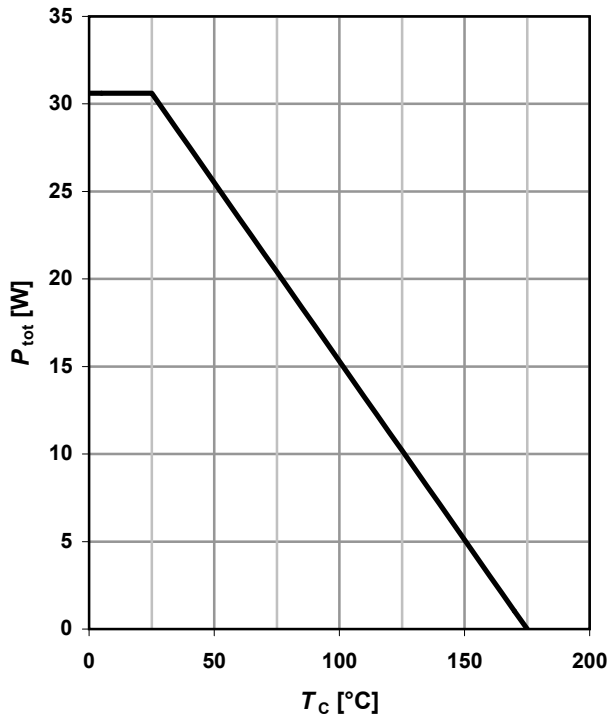

2 Drain current


$I_D = f(T_C); V_{GS} \geq 6 V; SMD$

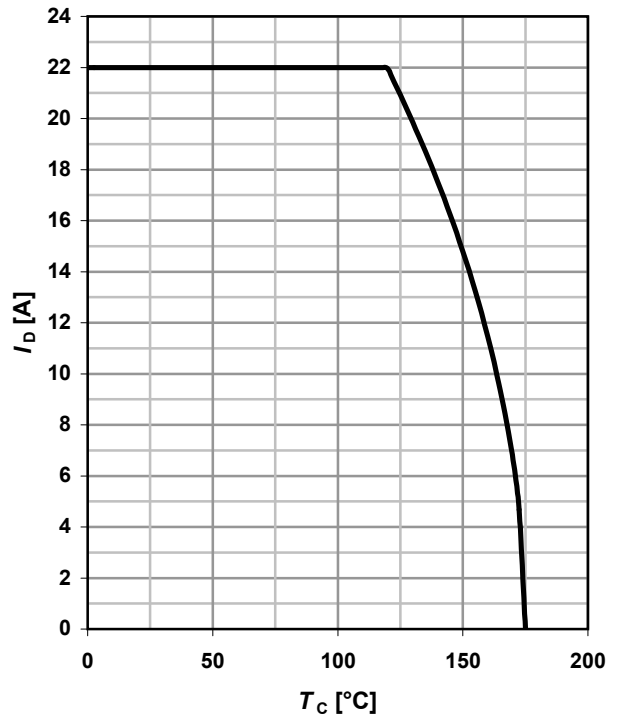

3 Safe operating area

$I_D = f(V_{DS}); T_C = 25\text{ °C}; D = 0, SMD$


parameter: t_p

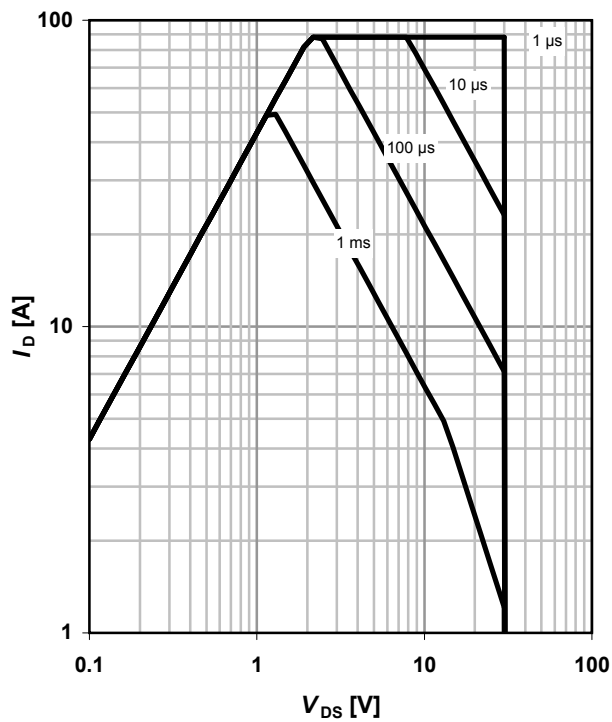

4 Max. transient thermal impedance

$Z_{thJC} = f(t_p)$


parameter: $D = t_p/T$

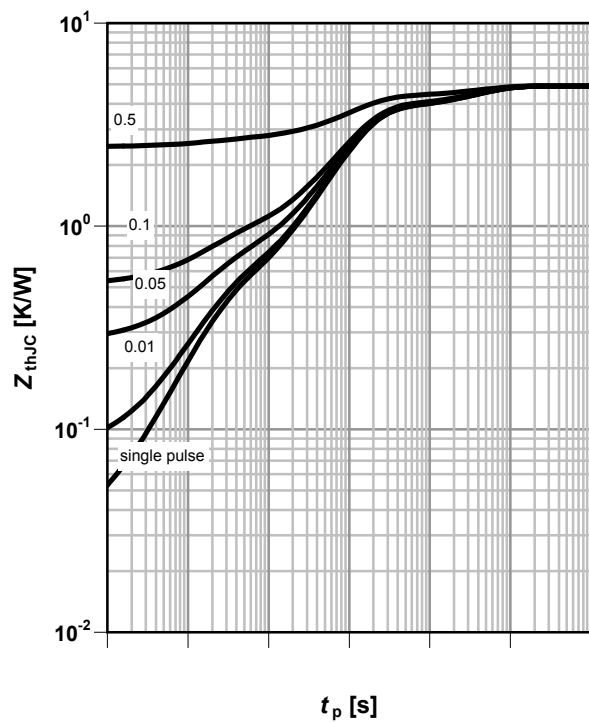

5 Typ. output characteristics

$I_D = f(V_{DS}); T_j = 25\text{ }^\circ\text{C}, \text{SMD}$


parameter: V_{GS}

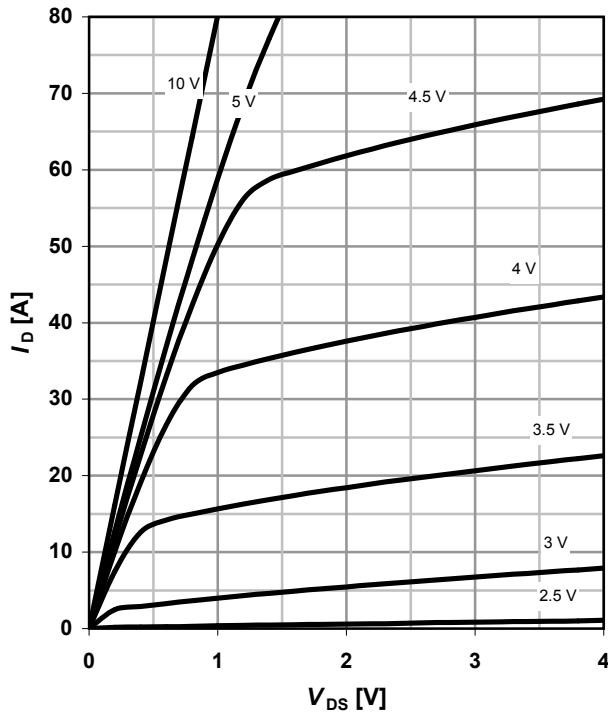

6 Typ. drain-source on-state resistance

$R_{DS(on)} = f(I_D); T_j = 25\text{ }^\circ\text{C}, \text{SMD}$


parameter: V_{GS}

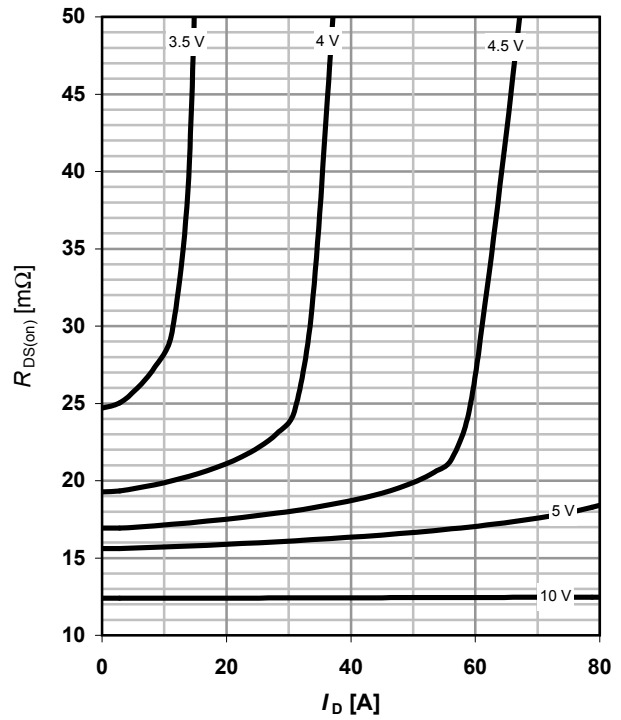

7 Typ. transfer characteristics


$I_D = f(V_{GS}); V_{DS} = 6\text{V}$

parameter: T_j

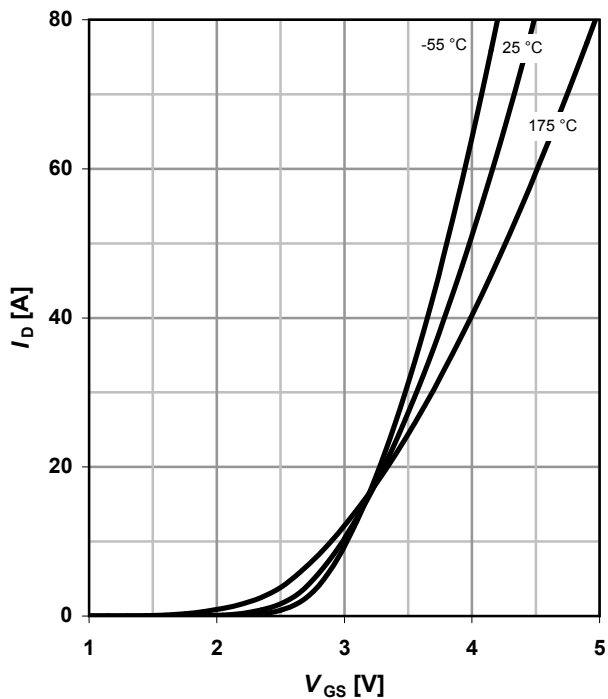

8 Typ. drain-source on-state resistance


$R_{DS(on)} = f(T_j); I_D = 22\text{ A}; V_{GS} = 10\text{ V}, \text{SMD}$

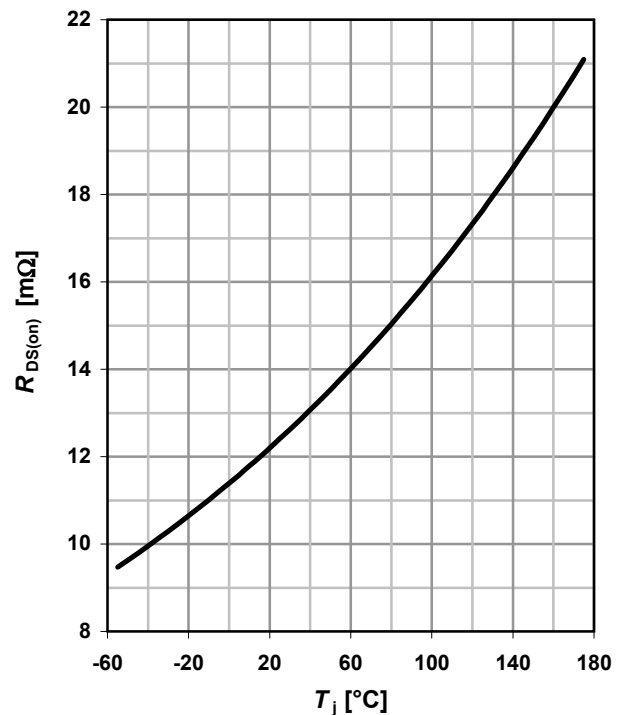

9 Typ. gate threshold voltage


$V_{GS(th)} = f(T_j); V_{GS} = V_{DS}$

parameter: I_D

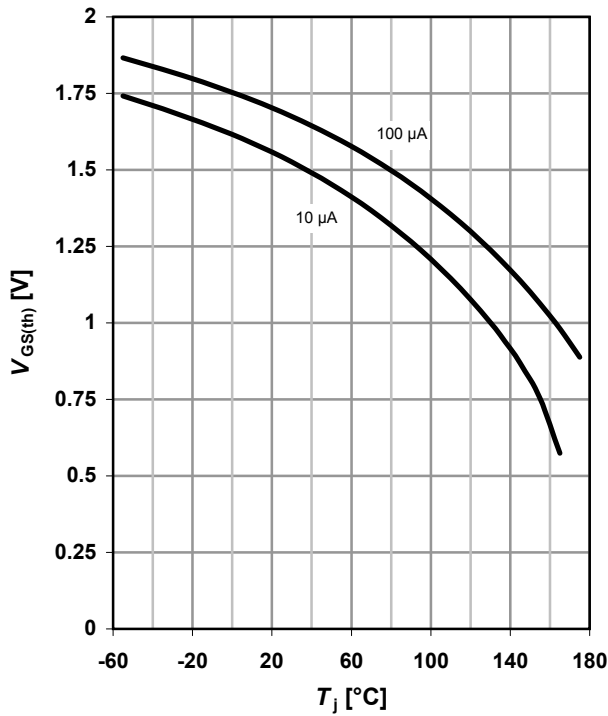

10 Typ. capacitances


$C = f(V_{DS}); V_{GS} = 0 \text{ V}; f = 1 \text{ MHz}$

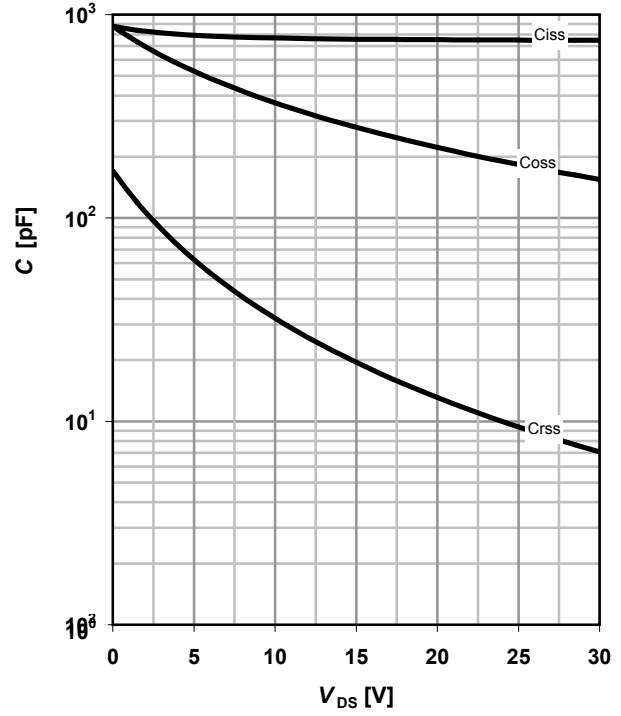

11 Typical forward diode characteristics

$I_F = f(V_{SD})$


parameter: T_j

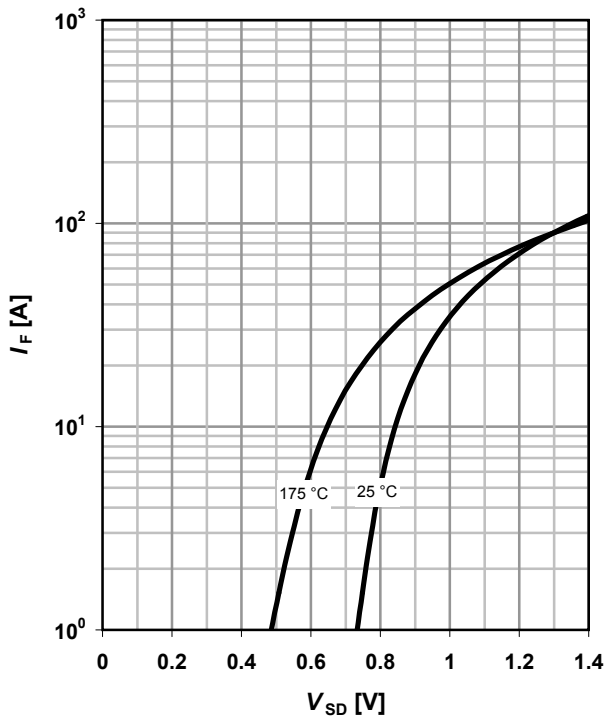

12 Typ. avalanche characteristics

$I_{AS} = f(t_{AV})$


parameter: $T_{j(start)}$

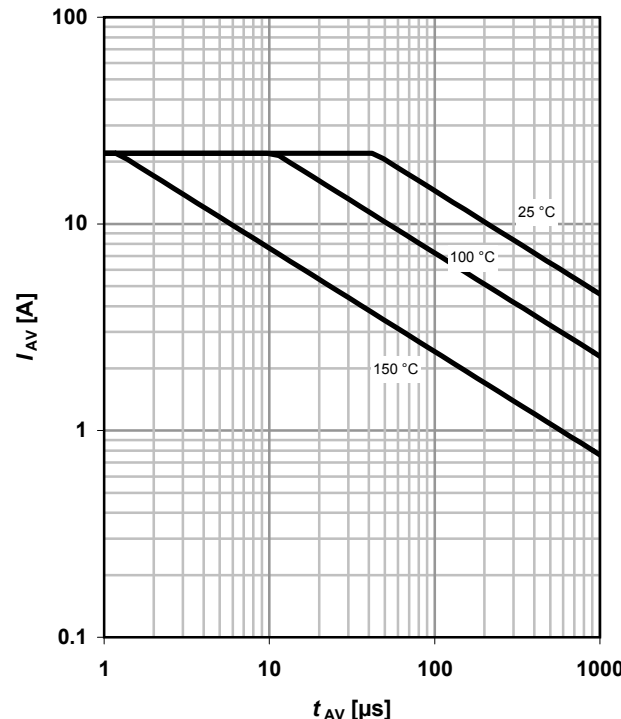

13 Typical avalanche energy


$E_{AS} = f(T_j)$

parameter: I_D

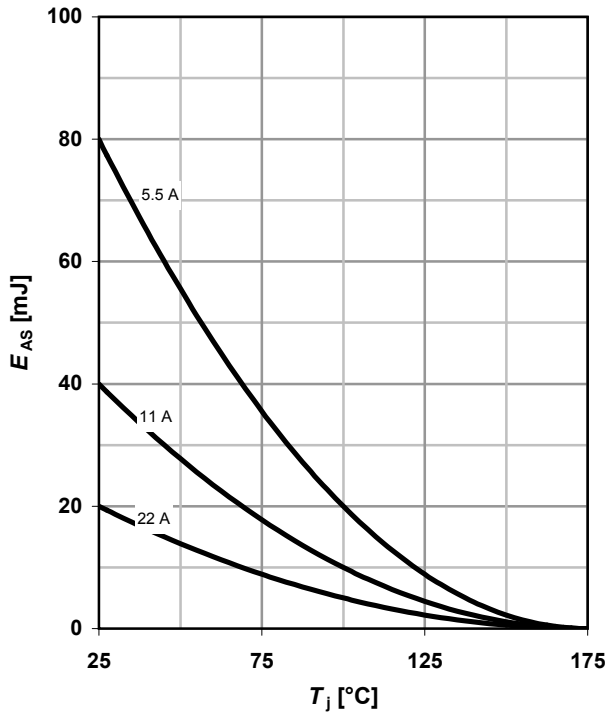

14 Typ. drain-source breakdown voltage


$V_{BR(DSS)} = f(T_j); I_D = 1 \text{ mA}$

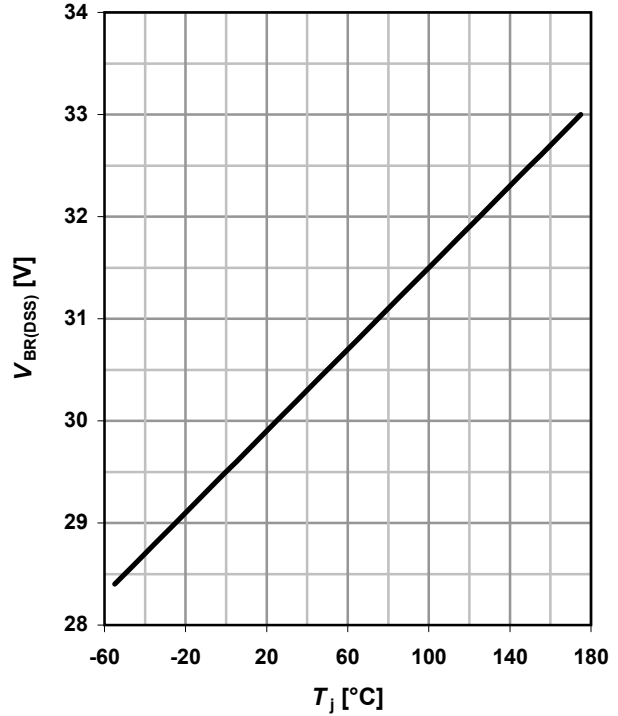


15 Typ. gate charge

$V_{GS} = f(Q_{gate}); I_D = 22 \text{ A pulsed}$

parameter: V_{DD}

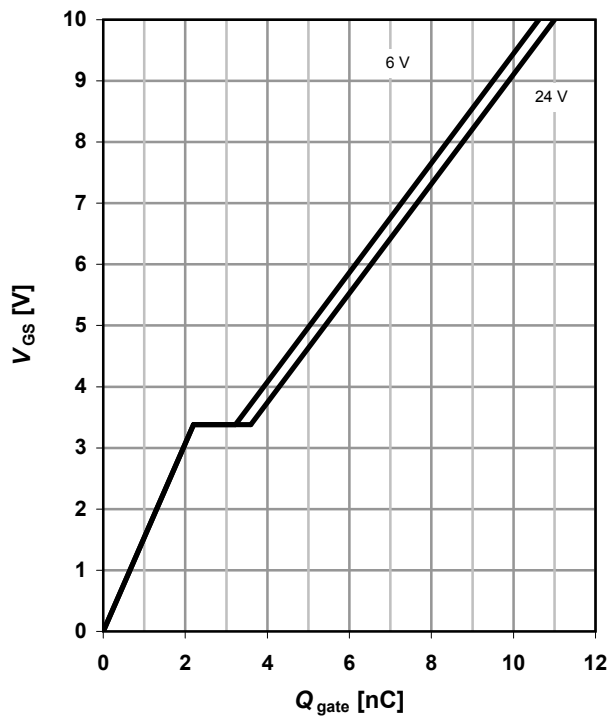

16 Gate charge waveforms

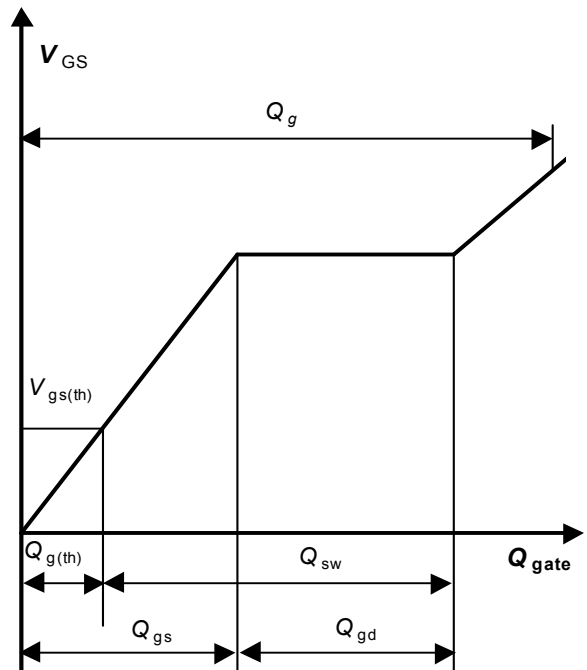

Published by
Infineon Technologies AG
81726 Munich, Germany

© Infineon Technologies AG 2007
All Rights Reserved.

Legal Disclaimer

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics ("Beschaffenheitsgarantie"). With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

Information

For further information on technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies Office (www.infineon.com).

Warnings

Due to technical requirements components may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies Office. Infineon Technologies Components may only be used in life-support devices or systems with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system, or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body, or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.



Revision History

| Version | Date | Changes |
|----------------|-------------|----------------|
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |