

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



# Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China









## **Dual Low Side Driver**

### **Features**

- Gate drive supply range from 6V to 20V
- CMOS Schmitt-triggered inputs
- Matched propagation delay for both channels
- Outputs in phase with inputs


## **Product Summary**

I <sub>O+/-</sub>	1.5A / 1.5A
V <sub>OUT</sub>	6V – 20V
Ton/off (typ.)	85 & 65 ns

## **Description**

The IR25600(S) is a low voltage, high speed power MOSFET and IGBT driver. Proprietary latch immune CMOS technologies enable ruggedized monolithic construction. Logic inputs are compatible with standard CMOS or LSTTL outputs. The output drivers feature a high pulse current buffer stage designed for minimum driver crossconduction. Propagation delays between two channels are matched.

### **Package Options**

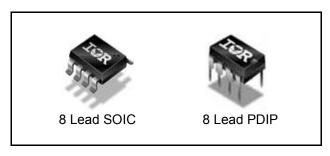


## **Ordering Information**

Daga Dagt Normbar		Standar	d Pack	Oudevelde Deut Neueleeu
Base Part Number	Package Type	Form	Quantity	Orderable Part Number
IR25600SPBF	SO8N	Tube	95	IR25600SPBF
IR25600SPBF	SO8N	Tape and Reel	2500	IR25600STRPBF
IR25600PBF	PDIP8	Tube	50	IR25600PBF



# **Typical Connection Diagram**

2 www.irf.com

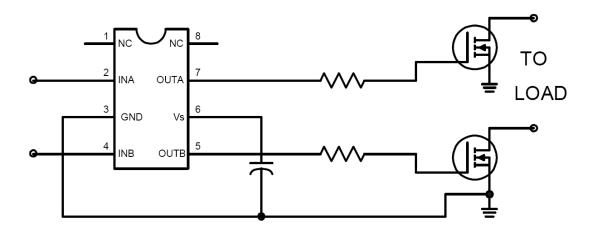



## **Absolute Maximum Ratings**

Absolute maximum ratings indicate sustained limits beyond which damage to the device may occur. All voltage parameters are absolute voltages referenced to GND. The thermal resistance and power dissipation ratings are measured under board mounted and still air conditions.

Symbol	Definition	Min.	Max.	Units			
V <sub>S</sub>	Fixed supply voltage		-0.3	25			
V <sub>O</sub>	Output voltage		-0.3	V <sub>S</sub> + 0.3	V		
V <sub>IN</sub>	Logic input voltage		-0.3	V <sub>S</sub> + 0.3			
Б	Package power dissipation @ T <sub>A</sub> ≤	8 lead PDIP	_	1	W		
$P_{D}$	+25°C		8 lead SOIC	_	0.625		
Dile	Thermal resistance, junction to	8 lead PDIP	_	125	°C/W		
KINJA	Rth <sub>JA</sub> ambient		A ambient 8 lead SOIC	8 lead SOIC	_	200	]
ТJ	Junction temperature	_	150				
T <sub>S</sub>	Storage temperature		-55	150	°C		
$T_L$	Lead temperature (soldering, 10 secon	ds)	_	300			

## **Recommended Operating Conditions**

For proper operation the device should be used within the recommended conditions. All voltage parameters are absolute voltages references to GND.

Symbol	Definition	Min.	Max.	Units
V <sub>S</sub>	Fixed supply voltage	6	20	
Vo	Output voltage	0	Vs	V
$V_{IN}$	Logic input voltage (IN & SD)	0	Vs	
T <sub>A</sub>	Ambient temperature	-40	125	°C

www.irf.com © 2013 International Rectifier March 26, 2013



### **Dynamic Electrical Characteristics**

 $V_{BIAS}$  (V<sub>S</sub>) = 15V, CL = 1000 pF and  $T_A$  = 25°C unless otherwise specified.

Symbol	Definition	Min.	Тур.	Max.	Units	Test Conditions
t <sub>on</sub>	Turn-on propagation delay	_	85	160		
t <sub>off</sub>	Turn-off propagation delay		65	150	ns	Figure 2
t <sub>r</sub>	Turn-on rise time	_	15	35	110	rigure 2
t <sub>f</sub>	Turn-off fall time	_	10	25		

### **Static Electrical Characteristics**

www.irf.com


 $V_{BIAS}$  ( $V_{S}$ ) = 15V and  $T_{A}$  = 25°C unless otherwise specified. The  $V_{IN}$  and  $I_{IN}$  parameters are referenced to GND and are applicable to input leads INA and INB. The  $V_{O}$  and  $I_{O}$  parameters are referenced to GND and are applicable to the respective output leads: OUTA and OUTB.

Symbol	Definition	Min.	Тур.	Max.	Units	<b>Test Conditions</b>
V <sub>IH</sub>	Logic "1" input voltage (OUTA = HI and OUTB = HI)	2.7	_	_		
V <sub>IL</sub>	Logic "0" input voltage (OUTA = LO and OUTB = LO)	_	_	0.8	V	
V <sub>OH</sub>	High level output voltage, V <sub>BIAS</sub> - V <sub>O</sub>	_	_	1.2		I <sub>O</sub> = 0A
$V_{OL}$	Low level output voltage, V <sub>O</sub>	_	_	0.1		$I_O = 0A$
I <sub>QS</sub>	Quiescent V <sub>S</sub> supply current	_	100	200		$V_{IN} = 0V \text{ or } V_{S}$
I <sub>IN+</sub>	Logic "1" input bias current (OUT = HI)	_	5	15	μA	V <sub>IN</sub> = V <sub>S</sub>
I <sub>IN-</sub>	Logic "0" input bias current (OUT = LO)		-10	-30		V <sub>IN</sub> = 0V
I <sub>O+</sub>	Output high short circuit pulsed current	1.5	2.3		A	$V_O = 0V$ , $V_{IN} = V_S$ $PW \le 10 \mu s$
I <sub>O-</sub>	Output low short circuit pulsed current	1.5	3.3	_	A	V <sub>O</sub> = 15V , V <sub>IN</sub> = 0V PW ≤ 10 μs



# **Functional Block Diagram**

5 www.irf.com

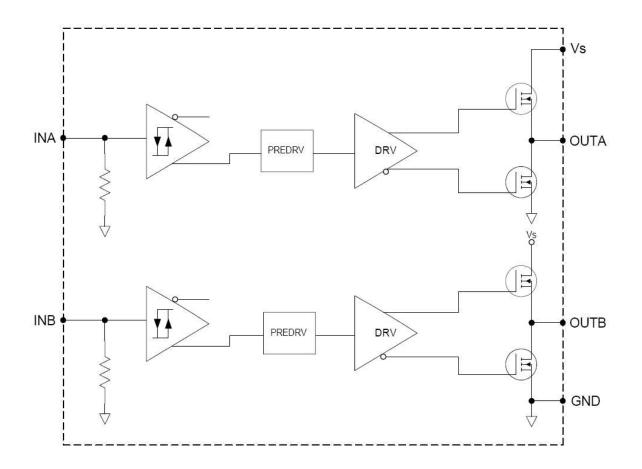




## **Lead Definitions**

Symbol	Description
INA	Logic input gate driver output (OUTA), in phase
INB	Logic input gate driver output (OUTB), in phase
OUTA	Gate drive output A
OUTB	Gate drive output B
Vs	Supply Voltage
GND	Ground

# **Lead Assignments**

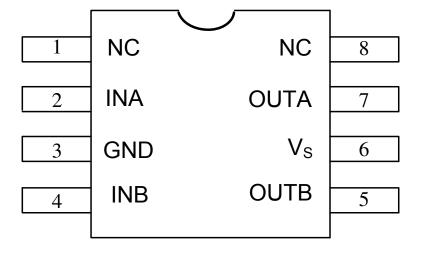



# **Application Information and Additional Information**

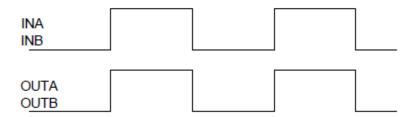
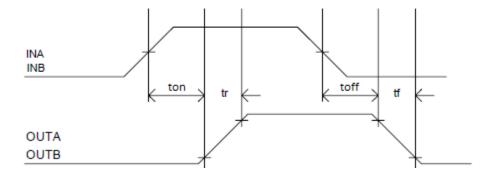


Figure 1. Input/Output Timing Diagram



**Figure 2. Switching Time Waveform Definitions** 


www.irf.com


March 06, 2013



### **Package Details**


www.irf.com

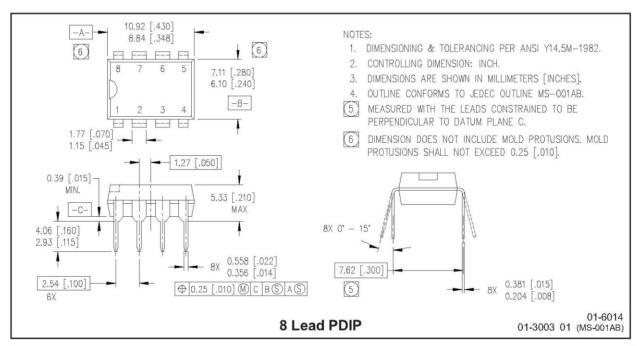

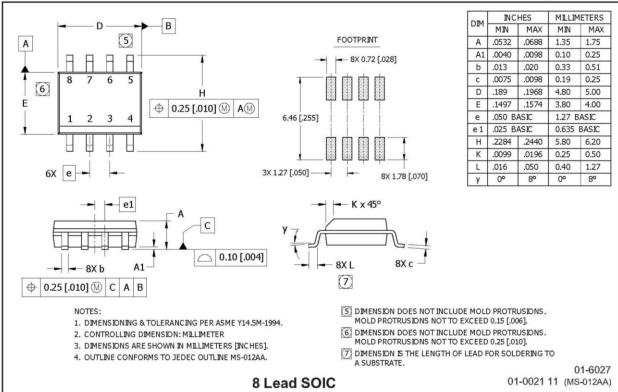




# Tape and Reel Details, SO8N

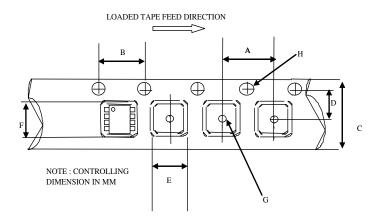

#### CARRIER TAPE DIMENSION FOR 8SOICN

	Metric		Imperial	
Code	Min	Max	Min	Max
Α	7.90	8.10	0.311	0.318
В	3.90	4.10	0.153	0.161
С	11.70	12.30	0.46	0.484
D	5.45	5.55	0.214	0.218
E	6.30	6.50	0.248	0.255
F	5.10	5.30	0.200	0.208
G	1.50	n/a	0.059	n/a
Н	1.50	1.60	0.059	0.062

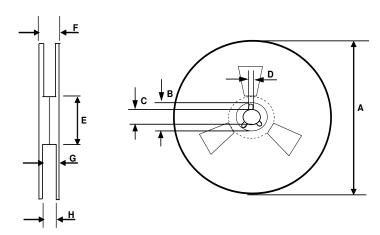


#### REEL DIMENSIONS FOR 8SOICN

	Metric		Imperial	
Code	Min	Max	Min	Max
Α	329.60	330.25	12.976	13.001
В	20.95	21.45	0.824	0.844
C	12.80	13.20	0.503	0.519
D	1.95	2.45	0.767	0.096
E F	98.00	102.00	3.858	4.015
	n/a	18.40	n/a	0.724
G	14.50	17.10	0.570	0.673
Н	12.40	14.40	0.488	0.566



## **Part Marking Information**

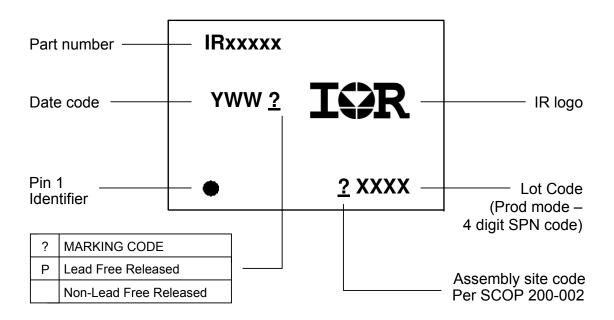

10 <u>www.irf.com</u> © 2013 International Rectifier March 26, 2013



## Qualification Information<sup>†</sup>

www.irf.com

Qualification Level		Industrial <sup>††</sup> (per JEDEC JESD 47)		
	Comments: This family	Comments: This family of ICs has passed JEDEC's		
		Industrial qualification. IR's Consumer qualification level is		
	granted by extension of t	granted by extension of the higher Industrial level.		
	SOIC8N	MSL2 <sup>†††</sup>		
Moisture Sensitivity Level	3010811	(per IPC/JEDEC J-STD 020)		
Worstare definitivity Level	PDIP8	Not applicable		
	r Dir 0	(non-surface mount package style)		
RoHS Compliant		Yes		

- † Qualification standards can be found at International Rectifier's web site <a href="http://www.irf.com/">http://www.irf.com/</a>
- †† Higher qualification ratings may be available should the user have such requirements. Please contact your International Rectifier sales representative for further information.
- ††† Higher MSL ratings may be available for the specific package types listed here. Please contact your International Rectifier sales representative for further information.

The information provided in this document is believed to be accurate and reliable. However, International Rectifier assumes no responsibility for the consequences of the use of this information. International Rectifier assumes no responsibility for any infringement of patents or of other rights of third parties which may result from the use of this information. No license is granted by implication or otherwise under any patent or patent rights of International Rectifier. The specifications mentioned in this document are subject to change without notice. This document supersedes and replaces all information previously supplied.

For technical support, please contact IR's Technical Assistance Center <a href="http://www.irf.com/technical-info/">http://www.irf.com/technical-info/</a>

#### **WORLD HEADQUARTERS:**

233 Kansas St., El Segundo, California 90245 Tel: (310) 252-7105