

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China







ISP814X, ISP824X, ISP844X ISP814, ISP824, ISP844

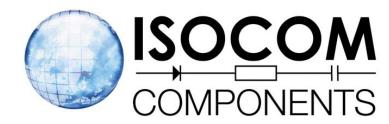

## HIGH DENSITY A.C. INPUT PHOTOTRANSISTOR OPTICALLY COUPLED ISOLATORS



### **APPROVALS**

UL recognised, File No. E91231
 Package Code " EE "

### 'X'SPECIFICATIONAPPROVALS

- VDE 0884 in 3 available lead form:
  - -STD
  - -G form
  - SMD approved to CECC 00802
- ISP814 Certified to EN60950 by Nemko - Certificate No. P01102465

### DESCRIPTION


The ISP814, ISP824, ISP844 series of optically coupled isolators consist of two infrared light emitting diodes connected in inverse parallel and NPN silicon photo transistors in space efficient dual in line plastic packages.


## **FEATURES**

- Options:10mm lead spread add G after part no.
  Surface mount add SM after part no.
  Tape&reel add SMT&R after part no.
- High Isolation Voltage (5.3kV<sub>RMS</sub>,7.5kV<sub>PK</sub>)
- AC or polarity insensitive input
- All electrical parameters 100% tested
- Custom electrical selections available

## **APPLICATIONS**

- Computer terminals
- Industrial systems controllers
- Telephone sets, Telephone exchangers
- Signal transmission between systems of different potentials and impedances



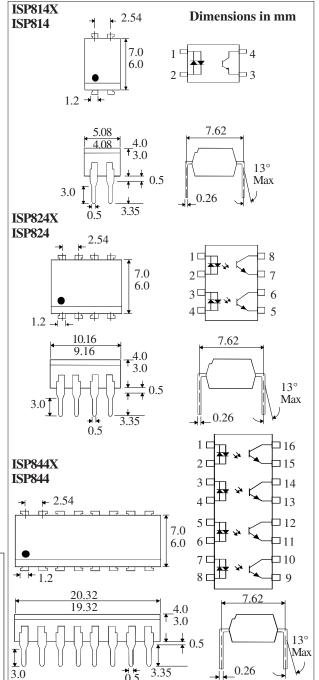

#### ISOCOM COMPONENTS 2004 LTD

Unit 25B, Park View Road West,
Park View Industrial Estate, Brenda Road
Hartlepool, TS25 1UD England
Tel: (01429)863609 Fax: (01429)863581 e-mail
sales@isocom.co.uk http://www.isocom.com

DB91070

## ABSOLUTEMAXIMUMRATINGS

 $(25^{\circ}C\,unless\,otherwise\,specified)$ 

Storage Temperature	$_{-55^{\circ}\text{C}}$ to $+ 125^{\circ}\text{C}$
Operating Temperature	$_{-30^{\circ}\text{C}}$ to + $100^{\circ}\text{C}$
Lead Soldering Temperature	
(1/16 inch (1.6mm) from case fo	r 10 secs) 260°C

## **INPUTDIODE**

Forward Current	±50mA
Power Dissipation	70mW

## OUTPUTTRANSISTOR

Collector-emitter Voltage BV <sub>CEO</sub>	35V
Emitter-collector Voltage BV <sub>ECO</sub>	6V
Collector Current	50mA
Power Dissipation	150mW

## **POWERDISSIPATION**

Total Power Dissipation	200mW
(derate linearly 2.67mW/°C above 25°C)	)

## ELECTRICAL CHARACTERISTICS ( $\rm T_{_{A}}$ = 25°C Unless otherwise noted )


	PARAMETER	MIN	TYP	MAX	UNITS	TEST CONDITION
Input	Forward Voltage (V <sub>F</sub> )		1.2	1.4	V	$I_{F} = \pm 20 \text{mA}$
Output	Collector-emitter Breakdown (BV <sub>CEO</sub> ) (Note 2)  Emitter-collector Breakdown (BV <sub>ECO</sub> )	35 6		100	V	$I_{\rm C} = 1 \text{mA}$ $I_{\rm E} = 100 \mu \text{A}$
Coupled	Collector-emitter Dark Current (I <sub>CEO</sub> )  Current Transfer Ratio (CTR) (Note 2) ISP814, ISP824, ISP844 ISP814A, ISP824A, ISP844A  Collector-emitter Saturation VoltageV <sub>CE (SAT)</sub>	20 50		300 150 0.2	% % V	$V_{CE} = 20V$ $\pm 1 \text{mAI}_{F}, 5 \text{V } V_{CE}$ $\pm 20 \text{mAI}_{F}, 1 \text{mAI}_{C}$
	Input to Output Isolation Voltage $V_{\rm ISO}$ Input-output Isolation Resistance $R_{\rm ISO}$	5300 7500 5x10 <sup>10</sup>			$egin{array}{c} V_{ ext{RMS}} \ V_{ ext{PK}} \ \end{array}$	See note 1 See note 1 $V_{10} = 500V \text{ (note 1)}$
	Output Rise Time tr Output Fall Time tf		4 3	18 18	μs μs	$V_{CE} = 2V ,$ $I_{C} = 2mA, R_{L} = 100\Omega$

Note 1 Measured with input leads shorted together and output leads shorted together.


Note 2 Special Selections are available on request. Please consult the factory.

DB91070 17/7/08

## **Collector Power Dissipation vs. Ambient Temperature**




## **Collector-emitter Saturation** Voltage vs. Forward Current




Collector-emitter saturation voltage V<sub>CE(SAT)</sub> (V)


## **Forward Current vs. Ambient Temperature**




## Collector Current vs. Collector-emitter Voltage



# **Collector-emitter Saturation**



### **Current Transfer Ratio vs. Forward Current**



DB91070