

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



# Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China







- 1N746AUR-1 THRU 1N759AUR-1 AVAILABLE IN JAN, JANTX AND JANTXV PER MIL-PRF-19500/127
- 1N4370AUR-1 THRU 1N4372AUR-1 AVAILABLE IN **JAN**, **JANTX** AND **JANTXV**PER MIL-PRF-19500/127
- LEADLESS PACKAGE FOR SURFACE MOUNT
- METALLURGICALLY BONDED

1N746AUR-1 thru 1N759AUR-1 and

1N4370AUR-1 thru 1N4372AUR-1 and

CDLL746 thru CDLL759A and

CDLL4370 thru CDLL4372A

#### **MAXIMUM RATINGS**

Operating Temperature: -65°C to +175°C Storage Temperature: -65°C to +175°C

DC Power Dissipation: 500 mW @  $T_{EC}$  = +125°C Power Derating: 10 mW / °C above  $T_{EC}$  = +125°C Forward Voltage @ 200mA: 1.1 volts maximum

#### **ELECTRICAL CHARACTERISTICS @ 25°C**


ELECTRICAL CHARACTERISTICS @ 25°C						
CDI TYPE NUMBER	NOMINAL ZENER VOLTAGE	ZENER TEST CURRENT	MAXIMUM ZENER IMPEDANCE	MAXIMUM REVERSE CURRENT		MAXIMUM ZENER CURRENT
			(NOTE 3)			
(NOTE 1)	V <sub>7</sub> @ 1 <sub>7T</sub>	1 <sub>7T</sub>	Z <sub>7T</sub> @ 1 <sub>7T</sub>	I <sub>R</sub> @ V <sub>R</sub>		1 <sub>7M</sub>
	(NOTE 2)					
	VOLTS	mA	онмѕ	μΑ	VOLTS	mA
CDLL4370A	2.4	20	30	100	1.0	155
CDLL4371A	2.7	20	30	60	1.0	140
CDLL4372A	3.0	20	29	30	1.0	125
CDLL746A	3.3	20	28	5	1.0	120
CDLL747A	3.6	20	24	3	1.0	110
CDLL748A	3.9	20	23	2	1.0	100
CDLL749A	4.3	20	22	2	1.0	90
CDLL750A	4.7	20	19	5	1.5	85
CDLL751A	5.1	20	17	5	2.0	75
CDLL752A	5.6	20	11	5	2.5	70
CDLL753A	6.2	20	7	5	3.5	65
CDLL754A	6.8	20	5	2	4.0	60
CDLL755A	7.5	20	6	2	5.0	55
CDLL756A	8.2	20	8	1	6.0	50
CDLL757A	9.1	20	10	1	7.0	45
CDLL758A	10.0	20	17	1	8.0	40
CDLL759A	12.0	20	30	1	9.0	35

NOTE 1 Zener voltage tolerance on "A" suffix is ±5%. No Suffix denotes ± 10% tolerance.

"C" suffix denotes ± 2% tolerance and "D" suffix denotes ± 1% tolerance.

**NOTE 2** Zener voltage is measured with the device junction in thermal equilibrium at an ambient temperature of 25°C,  $\pm$ 3°C.

NOTE 3 Zener impedance is derived by superimposing on 1<sub>ZT</sub> A 60Hz rms a.c. current equal to 10% of 1<sub>ZT</sub>.

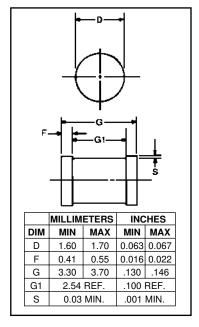

#### FIGURE 1

#### **DESIGN DATA**

**CASE:** DO-213AA, Hermetically sealed glass case. (MELF, SOD-80, LL34)

**LEAD FINISH:** Tin / Lead

THERMAL RESISTANCE: ( $R_{\mbox{OJEC}}$ ): 100 °C/W maximum at L = 0 inch

THERMAL IMPEDANCE: (ZQJX): 25

°C/W maximum

**POLARITY:** Diode to be operated with the banded (cathode) end positive.

**MOUNTING POSITION:** Any.

## MOUNTING SURFACE SELECTION:


The Axial Coefficient of Expansion (COE) Of this Device is Approximately +6PPM/°C. The COE of the Mounting Surface System Should Be Selected To Provide A Suitable Match With This Device.



WEBSITE: http://www.microsemi.com


# CDLL746 thru CDLL759A and CDLL4370 thru CDLL4372A

## FIGURE 2

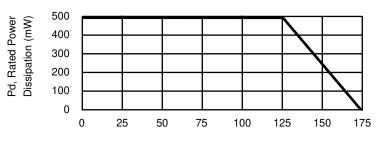

 $\mathsf{T}_{\mbox{\footnotesize{EC}}}$  , End cap temperature (°C)

# **POWER DERATING CURVE**

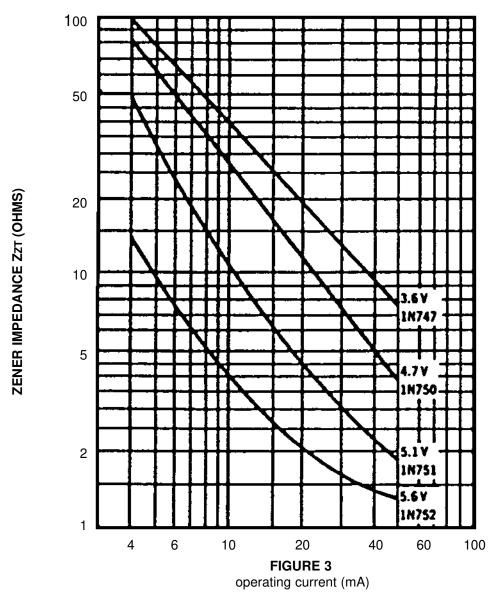

ZENER IMPEDANCE VS. OPERATING CURRENT