

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



# Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China







# **SCRs**

## 1.6 Amp, Planar

2N2323-2N2329, J, JTX, JTXV 2N2323A-2N2328Á, J, JTX, JTXV 2N2323S-2N2329S, J, JTX, JTXV 2N2323AS-2N2328AS, J. JTX, JTXV

#### **FEATURES**

- Available as JAN, JANTX, & JANTXV Types
- JAN Types Available in TO-5
- 1.6A D.C. Current
- Peak Currents: to 30A
- Voltage Ratings: to 400V
- 20µA Max. Trigger Current ("A" types)
- 0.6V Max. Trigger Voltage ("A" types)




DESCRIPTION


These are premium thyristor switches intended for use in high performance industrial, military and space applications requiring a high degree of reliability assurance. This series is useful in a wide variety of applications including timing and programming circuits, protective and warning circuits, driving relays, driving indicator lamps, encoding and decoding circuits, replacing relays, thyratrons, and magamps, servo motor control, pulse generation, plus many others. The high surge current rating (15A - 1 cycle) makes this series particularly useful for squib firing.

The following JAN, JANTX and JANTXV types are specified under Mil-S-19500/276A and are included in Mil-STD-701 as recommended types for military usage:

BACKSOIC AND COMMENT OF THE PROPERTY OF THE PR	2N2323 JAN2N2323S JANTX2N2323S JANTX2N2323S 2N2323A JAN2N2323AS JANTX2N2323AS JANTX2N2323AS	2N2324 JAN2N2324S JANTX2N2324S JANTX2N2324S 2N2324A JAN2N2324AS JANTX2N2324AS JANTX2N2324AS	2N2325 2N2325A	2M2326 JAN2N2326S JANTX2N2326S JANTX2N2326S 2N2326A JAN2N2326AS JANTX2N2326AS JANTX2N2326AS	2N2327 2N2327A	2N2328 JAN2N2328S JANTX2N2328S JANTX2N2328S 2N2328A JAN2N2328AS JANTX2N2328AS JANTX2N2328AS	2N2329 JAN2N2329S JANTX2N2329S JANTX2N2329S
Repetitive Peak Off-State Voltage, Voltage, Voltage			150V		250V	300V	
Repetitive Peak Reverse			1001		2007		
Voltage, V <sub>RRM</sub>	50V	100V	150V	200V	250V	300V	400V
Non-Repetitive Peak Reverse							
Voltage, V <sub>RSM</sub> (< 5ms)	75V	150V	225V	300V	350V	400V	500V
D.C. On-State Current, I <sub>T</sub>							
80°C Ambient							
85°C Case				1.6A			
One Cycle Surge (Non-Rep.) On-State Current	t, I <sub>ISM</sub>			15A			
Repetitive Peak On-State Current, ITM				30A			
Gate Power Dissipation, P <sub>GM</sub>				0.1W			
Gate Power Dissipation, PGM(AV)				0.01W			******
Peak Gate Current, I <sub>GM</sub>				100mA			
Reverse Gate Voltage				6V			
Reverse Gate Current, IGR				3mA			
Storage Temperature Range							
Operating Temperature Range				-65°C to +125	°C		

### **MECHANICAL SPECIFICATIONS**

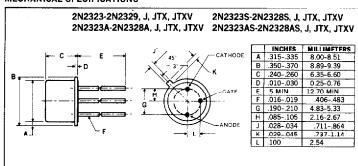





#### **ELECTRICAL SPECIFICATIONS**


Test	Symbol	Min.	Typical	Max.	Units	Test Conditions
Visual and Mechanical						MIL-STD-750, Method 2071
25°C Off-State Current Reverse Current	I <sub>DRM</sub>		0.1 0.1	10 10	μ <b>Α</b> μ <b>Α</b>	$V_{DRM} \simeq Rating$ , $R_{GK} = 1K$ (2K for "A" Types) $V_{RRM} \simeq Rating$ , $R_{GK} = 1K$ (2K for "A" Types)
Gate Trigger Current "A" Types non-"A" Types Gate Trigger Voltage	l <sub>GT</sub> V <sub>GT</sub>	_	2 50	20 200	μ <b>Α</b> μ <b>Α</b>	$\begin{array}{l} {\rm V_D=6V,R_L=100\Omega} \\ {\rm V_D=6V,R_L=100\Omega} \end{array}$
"A" Types non-"A" Types On-State Voltage Holding Current	V <sub>ET</sub>	0.35 0.35 —	0.52 0.55 2.0 0.3	0.60 0.80 2.2 2.0	V V V	$\begin{split} &V_D=6V, R_{GK}=2K, R_L=100\Omega \\ &V_D=6V, R_{GK}=1K, R_L=100\Omega \\ &I_{TM}=4A \text{ (pulse test)} \\ &V_U=6V, R_{GK}=1K \text{ (2K for "A" Typec)} \end{split}$
Reverse Gate Current Delay Time Rise Time Circuit Commutated Turn-Off Time	t <sub>d</sub> t <sub>r</sub>	1 1 1 1	1 0.6 0.4 20	200* — —	μ <b>Α</b> μs μs μs	$\begin{array}{l} {\rm V_{GR}=6V} \\ {\rm I_{G}=10 mA,\ I_{T}=1 A,\ V_{D}=30 V} \\ {\rm I_{G}=10 mA,\ I_{T}=1 A,\ V_{D}=30 V} \\ {\rm I_{T}=1 A,\ I_{R}=1 A,\ R_{GK}=1 K} \end{array}$
125°C Off-State Current Reverse Current Gate Trigger Voltage Holding Current	I <sub>DRM</sub> I <sub>RRM</sub> V <sub>GT</sub>	 0.1	1 1 0.3	100 100 —	μ <b>Α</b> μ <b>Α</b> <b>V</b>	$V_{\rm DRM}=Rating,R_{\rm GK}=1$ K (2K for "A" Types) $V_{\rm RRM}=Rating,R_{\rm GK}=1$ K (2K for "A" Types) $V_{\rm D}=RatedV_{\rm D},R_{\rm GK}=1$ K (2K for "A" Types)
"A" Types non-"A" Types Off-State Voltage — Critical Rate of Rise	I <sub>H</sub>	0.1† 0.15†		_	mA mA	$egin{aligned} \mathbf{V}_\mathrm{D} &= 6 \mathbf{V},  \mathbf{R}_\mathrm{GK} = 2 \mathbf{K} \\ \mathbf{V}_\mathrm{D} &= 6 \mathbf{V},  \mathbf{R}_\mathrm{GK} = 1 \mathbf{K} \end{aligned}$
"A" Types non-"A" Types	avyat	0.7* 1.8*				$V_D = Rating, R_{GK} = 2K$ $V_D = Rating, R_{GK} = 1K$
—65°C Off-State Current Reverse Current	I <sub>DRM</sub> I <sub>RRM</sub>	1 1	.05 .05	5.0* 5.0*	μ <b>Α</b> μ <b>Α</b>	$V_{DRM}=$ Rating, $R_{GK}=$ 1K (2K for "A" Types) $V_{RRM}=$ Rating, $R_{GK}=$ 1K (2K for "A" Types)
Gate Trigger Current  "A" Types non-"A" Types Gate Trigger Voltage	V <sub>GT</sub>	_	50 100	75 350	μ <b>Α</b> μ <b>Α</b>	$\begin{array}{l} V_D = 6V, R_L = 100\Omega \\ V_D = 6V, R_L = 100\Omega \end{array}$
"A" Types	·GT		0.7	0.8* 0.9†	V	$V_D = 6V, R_{GK} = 2K, R_L = 100\Omega$ $V_D = 6V, R_{GK} = 2K, R_L = 100\Omega$
non-"A" Types Holding Current	I <sub>H</sub>	-	0.75 —	1.0 3.0†	V mA	$V_D = 6V$ , $R_{GK} = 1K$ , $R_L = 100\Omega$ $V_D = 6V$ , $R_{GK} = 1K$ (2K for "A" Types)


<sup>\*</sup> JAN and JANTX Types only. † Industrial Types only.

### JAN and JANTX Acceptance Tests


STEEL STREET BIR NAL							
100% Screening TX-Types	Group B Tests	Group C Tests					
High Temperature Storage Temperature Cycling Constant Acceleration Fine & Gross Hermetic Seal Electrical Test Burn-in Electrical Test	Subgroup 1 — Reverse Gate Current Surge Current Non-Repetitive Reverse Voltage  Subgroup 2 — Low Temp. Reverse Blocking Current Low Temp. Forward Blocking Current Low Temp. Gate Trigger Voltage Low Temp. Gate Trigger Current	Subgroup 1 — Physical Dimensions  Subgroup 2 — Shock Constant Acceleration Vibration, Variable Frequency  Subgroup 3 — Barometric Pressure, Reduced  Subgroup 4 — Salt Atmosphere					
	Subgroup 3 — Temperature Cycling Thermal Shock Moisture Resistance Solderability	Subgroup 5 — Terminal Strength Subgroup 6 — Intermittent Operating Life Test					
	Subgroup 4 — Blocking Life Test						


**Gate Trigger Voltage** 





#### **Holding Current**







85 90 95 100 105 110 115 120 125 T<sub>C max</sub> — MAXIMUM CASE TEMPERATURE (°C)

60°C

o | 75 80

### Average Current vs. Ambient Temperature





580 PLEASANT STREET • WATERTOWN, MA 02172 TEL. (617) 926-0404 • FAX (617) 924-1235

8-11