

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



# Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China









#### Is Now Part of



# ON Semiconductor®

To learn more about ON Semiconductor, please visit our website at <a href="https://www.onsemi.com">www.onsemi.com</a>

ON Semiconductor and the ON Semiconductor logo are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any EDA Class 3 medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, emplo



November 2014

# **KSC1008 NPN Epitaxial Silicon Transistor**

#### **Features**

- · Low-Frequency Amplifier Medium Speed Switching
- High Collector-Base Voltage: V<sub>CBO</sub> = 80 V
- Collector Current : I<sub>C</sub> = 700 mA
- Suffix "-C" means Center Collector (1. Emitter 2. Collector 3. Base)
- Non Suffix "-C" means Side Collector (1. Emitter 2. Base 3. Collector)
- Complement to KSA708



KSC1008: 1. Emitter 2. Base 3. Collector KSC1008C: 1. Emitter 2. Collector 3. Base

## Ordering Information(1)

Part Number	Top Mark	Package	Packing Method
KSC1008OBU	C1008 O-	TO-92 3L	Bulk
KSC1008YBU	C1008 Y-	TO-92 3L	Bulk
KSC1008YTA	C1008 Y-	TO-92 3L	Ammo, 2000 pcs
KSC1008CYTA	C1008 YC	TO-92 3L	Ammo, 2000 pcs
KSC1008GTA	C1008 G-	TO-92 3L	Ammo, 2000 pcs

#### Note:

1. Affix "-C-" means center collector pin. Affix "-O-, -Y-, -G-" means h<sub>FE</sub> classification. Suffix "-BU" means bulk packing, straight lead form. Suffix "-TA" means tape and ammo packing, 0.200 in-line spacing lead form.

## **Absolute Maximum Ratings**

Stresses exceeding the absolute maximum ratings may damage the device. The device may not function or be operable above the recommended operating conditions and stressing the parts to these levels is not recommended. In addition, extended exposure to stresses above the recommended operating conditions may affect device reliability. The absolute maximum ratings are stress ratings only. Values are at  $T_A = 25^{\circ}\text{C}$  unless otherwise noted.

Symbol	Parameter	Value	Unit
V <sub>CBO</sub>	Collector-Base Voltage	80	V
V <sub>CEO</sub>	Collector-Emitter Voltage	60	V
V <sub>EBO</sub>	Emitter-Base Voltage	8	V
I <sub>C</sub>	Collector Current	700	mA
$T_J$	Junction Temperature	150	°C
T <sub>STG</sub>	Storage Temperature	-55 to 150	°C

## Thermal Characteristics(2)

Values are at  $T_A = 25$ °C unless otherwise noted.

Symbol	Parameter	Value	Unit
D	Power Dissipation	800	mW
P <sub>D</sub>	Derate Above 25°C	6.4	mW/°C
$R_{\theta JA}$	Thermal Resistance, Junction-to-Ambient	156	°C/W

### Note:

2. PCB size: FR-4, 76 mm x 114 mm x 1.57 mm (3.0 inch x 4.5 inch x 0.062 inch) with minimum land pattern size.

## **Electrical Characteristics**

Values are at  $T_A = 25$ °C unless otherwise noted.

Symbol	Parameter	Conditions	Min.	Тур.	Max.	Unit
BV <sub>CBO</sub>	Collector-Base Breakdown Voltage	$I_C = 100  \mu A,  I_E = 0$	80			V
BV <sub>CEO</sub>	Collector-Emitter Breakdown Voltage	$I_C = 10 \text{ mA}, I_B = 0$	60			V
BV <sub>EBO</sub>	Emitter-Base Breakdown Voltage	$I_E = 10 \mu A, I_C = 0$	8			V
I <sub>CBO</sub>	Collector Cut-Off Current	$V_{CB} = 60 \text{ V}, I_{E} = 0$			0.1	μΑ
I <sub>EBO</sub>	Emitter Cut-Off Current	$V_{EB} = 5 \text{ V}, I_{C} = 0$			0.1	μΑ
h <sub>FE</sub>	DC Current Gain	$V_{CE} = 2 \text{ V}, I_{C} = 50 \text{ mA}$	40		400	
V <sub>CE</sub> (sat)	Collector-Emitter Saturation Voltage	$I_C = 500 \text{ mA}, I_B = 50 \text{ mA}$		0.2	0.4	V
V <sub>BE</sub> (sat)	Base-Emitter Saturation Voltage	$I_C = 500 \text{ mA}, I_B = 50 \text{ mA}$		0.86	1.10	V
f <sub>T</sub>	Current Gain Bandwidth Product	$V_{CE} = 10 \text{ V}, I_{C} = 50 \text{ mA}$	30	50		MHz
C <sub>ob</sub>	Output Capacitance	$V_{CB} = 10 \text{ V}, I_{E} = 0,$ f = 1 MHz		8		pF

## h<sub>FE</sub> Classification

Classification	R	0	Υ	G
h <sub>FE</sub>	40 ~ 80	70 ~ 140	120 ~ 240	200 ~ 400

## **Typical Performance Characteristics**




Figure 1. Static Characteristic




Figure 3. Base-Emitter Saturation Voltage and Collector-Emitter Saturation Voltage




Figure 5. Collector Output Capacitance




Figure 2. DC Current Gain







Figure 4. Base-Emitter On Voltage

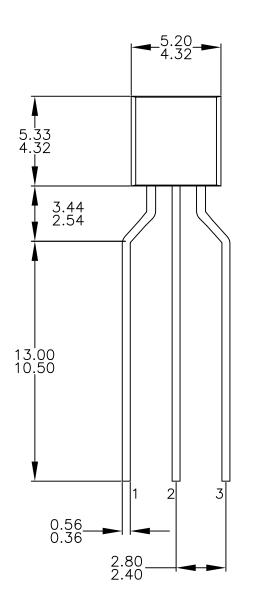


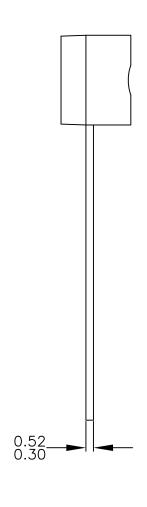




## NOTES: UNLESS OTHERWISE SPECIFIED


- DRAWING CONFORMS TO JEDEC MS-013, VARIATION AC.
  ALL DIMENSIONS ARE IN MILLIMETERS.
  DRAWING CONFORMS TO ASME Y14.5M-2009.
  DRAWING FILENAME: MKT-ZAO3FREV3.
  FAIRCHILD SEMICONDUCTOR.
- B. C. D. E.

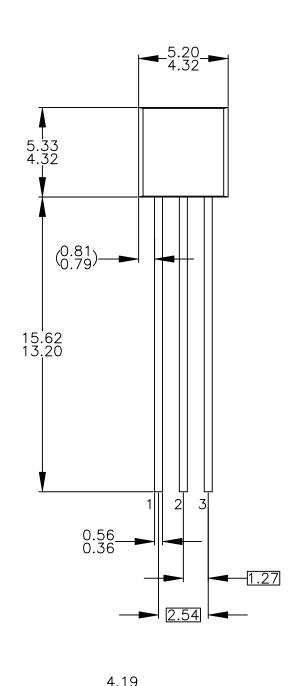

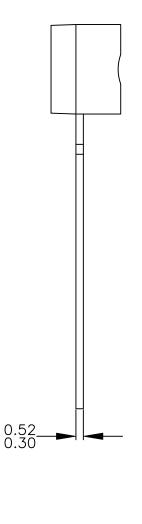

NOTES: UNLESS OTHERWISE SPECIFIED

- DRAWING WITH REFERENCE TO JEDEC TO-92 RECOMMENDATIONS.
  ALL DIMENSIONS ARE IN MILLIMETERS.
  DRAWING CONFORMS TO ASME Y14.5M-2009.
  DRAWING FILENAME: MKT-ZAO3DREV4.





ON Semiconductor and in are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at <a href="www.onsemi.com/site/pdf/Patent-Marking.pdf">www.onsemi.com/site/pdf/Patent-Marking.pdf</a>. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and exp

#### **PUBLICATION ORDERING INFORMATION**

#### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor 19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada Email: orderlit@onsemi.com N. American Technical Support: 800–282–9855 Toll Free USA/Canada
Europe, Middle East and Africa Technical Support:
Phone: 421 33 790 2910

Phone: 421 33 790 2910

Japan Customer Focus Center

Phone: 81–3–5817–1050

ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative