

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China










KSC2682

Audio Frequency Power Amplifier

Complement to KSA1142



NPN Epitaxial Silicon Transistor

Absolute Maximum Ratings T_{C} =25°C unless otherwise noted

Symbol	Parameter	Value	Units
V _{CBO}	Collector-Base Voltage	180	V
V _{CEO}	Collector-Emitter Voltage	180	V
V _{EBO}	Emitter-Base Voltage	5	V
I _C	Collector Current	100	mA
P _C	Collector Dissipation (T _a =25°C)	1.2	W
P _C	Collector Dissipation (T _C =25°C)	8	W
TJ	Junction Temperature	150	°C
T _{STG}	Storage Temperature	-55 ~ 150	°C

Electrical Characteristics $T_C=25$ °C unless otherwise noted

Symbol	Parameter	Test Condition	Min.	Тур.	Max.	Units
I _{CBO}	Collector Cut-off Current	$V_{CB} = 180V, I_{E} = 0$			1.0	μΑ
I _{EBO}	Emitter Cut-off Current	$V_{EB} = 3V, I_{C} = 0$			1.0	μА
h _{FE1} h _{FE2}	* DC Current Gain	$V_{CE} = 5V, I_{C} = 1mA$ $V_{CE} = 5V, I_{C} = 10mA$	90 100	190 200	320	
V _{CE} (sat)	* Collector-Emitter Saturation Voltage	$I_C = 50$ mA, $I_B = 5$ mA		0.12	0.5	V
V _{BE} (sat)	* Base-Emitter Saturation Voltage	$I_C = 50$ mA, $I_B = 5$ mA		0.8	1.5	V
f _T	Current Gain Bandwidth Product	$V_{CE} = 10V, I_{C} = 20mA$		200		MHz
C _{ob}	Output Capacitance	V _{CB} = 10V, I _E = 0 f = 1MHz		3.2	5.0	pF
NF	Noise Figure	$V_{CE} = 10V$, $I_{C} = 1mA$ $R_{S} = 10K\Omega$, $f = 1kHz$		4		dB

^{*} Pulse Test: PW≤350µs, Duty Cycle≤2%

h_{FE} Classificntion

Classification	0	Y	
h _{FE2}	100 ~ 200	160 ~ 320	

©2000 Fairchild Semiconductor International

Typical Characteristics




Figure 1. Static Characteristic




Figure 2. DC current Gain




Figure 3. Base-Emitter Saturation Voltage Collector-Emitter Saturation Voltage




Figure 4. Collector Output Capacitance




Figure 5. Current Gain Bandwidth Product






Figure 6. Safe Operating Area

©2000 Fairchild Semiconductor International Rev. A, February 2000

Typical Characteristics (Continued)






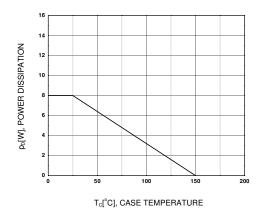



Figure 8. Power Derating

Package Demensions

K5C2682

TO-126

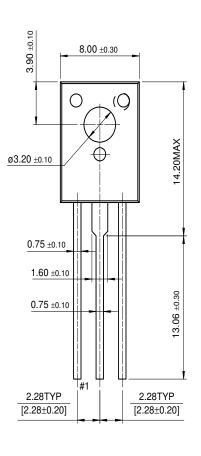

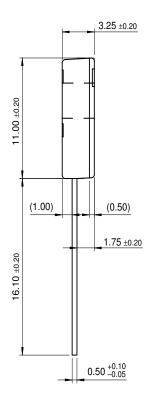

Dimensions in Millimeters

TRADEMARKS

The following are registered and unregistered trademarks Fairchild Semiconductor owns or is authorized to use and is not intended to be an exhaustive list of all such trademarks.

FACT™ QFET™ FACT Quiet Series™ QS™

FAST® Quiet Series TM SuperSOT TM -3 SuperSOT TM -6

DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR INTERNATIONAL.

As used herein:

- 1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.
- 2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

PRODUCT STATUS DEFINITIONS

Definition of Terms

Datasheet Identification	Product Status	Definition
Advance Information	Formative or In Design	This datasheet contains the design specifications for product development. Specifications may change in any manner without notice.
Preliminary	First Production	This datasheet contains preliminary data, and supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.
No Identification Needed	Full Production	This datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.
Obsolete	Not In Production	This datasheet contains specifications on a product that has been discontinued by Fairchild semiconductor. The datasheet is printed for reference information only.

©2000 Fairchild Semiconductor International Rev. E